



T8 900 Series Rapid Start

F32T8/TL950 SLV

Philips leads the industry with the lowest level mercury technology. Reducing the mercury level (source reduction) during the manufacturing phase is essential to creating products that are less harmful to the environment.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	15,000 hour(s)

Light Technical	
Color Code	TL950 [CCT of 5000K (950)]
Luminous Flux	2,000 lumen
Color Designation	TL950
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	63.9 lm/W
Color rendering index (CRI)	98

Operating and Electrical	
Power Consumption	32 W
Lamp Current (Nom)	0.265 A
Wattage Equivalent	32 W
Voltage (Nom)	139 V
Voltage (Nom)	139 V

Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Bulb Shape	T-8 (T8)

Approval and Application	
Mercury (Hg) Content (Nom)	5.0 mg

Product Data	
Order product name	F32T8/TL950 SLV
Order code	927942009520
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927942009520
Full product name	F32T8/TL950 SLV
EAN/UPC - Case	50046677209051
EAN/UPC - Product/Case	046677209056

T8 900 Series Rapid Start


Dimensional drawing

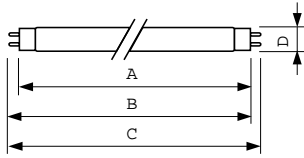

Product

F32T8/TL950 SLV

Photometric data

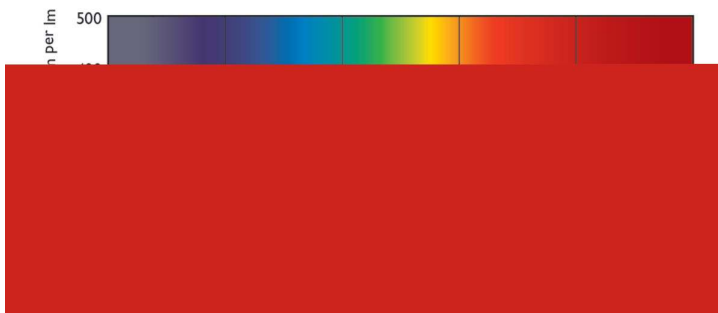

Spectral Power Distribution Colour - F32T8/TL950 SLV

