

AS-i SlimLine module Phased-out product !!! For further information, please contact our sales department S45, digital 4 DI/4 RQ, IP20 4 x inputs for 3-wire sensor 4 x 1 output, Relay, Screw terminals Overall width 45 mm

General technical data		
design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet
design of the slave type		standard slave
Type		4 inputs / 4 outputs
I/O configuration		7
ID/ID2 code		0/F
protocol is supported AS-Interface protocol		Yes
AS interface total current input max	mA	270
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Addressing		front addressing socket
type of electrical connection of the inputs and outputs		screw-type terminals
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		K
Sensor supply		
type of voltage supply for power supply		using AS-Interface
input voltage	V	20 ... 30
property of the sensor supply short-circuit and overload resistant		Yes
ampacity of the sensor supply for all inputs		
• at ambient temperature 40 °C	mA	200
Inputs		
number of digital inputs		4
type of connection technology		2- and 3-wire technology
Input circuit		PNP transistor
type of voltage of the input voltages		DC
Inputs switching level High min	V	10
input current at digital input		
• for signal <1> minimum	mA	5
• with signal <0> maximum	mA	1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant
Outputs		
number of digital outputs		4
Outputs		
• current carrying capacity Ith	A	5
ampacity		
• of the output relay		
— at DC-13		
— at 24 V	A	1
— at 110 V	A	0.2
— at 230 V	A	0.1
— at AC-15 at 230 V at 50/60 Hz	A	3
type of switching output		relay, changeover floating
property of the output short-circuit proof		No
output Polarity reversal protection		does not apply
Outputs		
• short-circuit protection		external back-up fuse required: 6 A gL/gG
• induction protection		does not apply
• watchdog		built-in
Status display		

<ul style="list-style-type: none"> <li>display of I/Os</li> <li>AS-Interface</li> <li>FAULT</li> </ul>		yellow LED green LED red LED
<b>Assignment of data bits</b> <ul style="list-style-type: none"> <li>D0</li> <li>D1</li> <li>D2</li> <li>D3</li> </ul>		IN1/OUT1 IN2 /OUT2 IN3/OUT3 IN4/OUT4

#### Ambient conditions

<b>ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul>	°C °C	-25 ... +70 -40 ... +85
<b>protection class IP</b>		IP20

#### Mechanical data

<b>width</b>	mm	45
<b>height</b>	mm	106
<b>depth</b>	mm	86
<b>fastening method</b>		35 mm standard rail mounting or wall mounting using push-in lugs
<b>Conductor cross-section</b> <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded               <ul style="list-style-type: none"> <li>with end sleeve</li> </ul> </li> <li>AWG solid or stranded</li> </ul>		1 x (0.5 - 4) mm <sup>2</sup> or 2 x (0.5 - 2.5) mm <sup>2</sup>  1 x (0.5 - 2.5) mm <sup>2</sup> or 2 x (0.5 - 1.5) mm <sup>2</sup> AWG 2 x (20 - 14) mm <sup>2</sup>

#### Certificates/ approvals

<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>
---------------------------------	------------	----------------------------------

[Confirmation](#)



<b>Marine / Shipping</b>	<b>other</b>
--------------------------	--------------



[Confirmation](#)

<b>other</b>
--------------

[Miscellaneous](#)

#### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1402-3CE00-0AA2>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1402-3CE00-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1402-3CE00-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1402-3CE00-0AA2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1402-3CE00-0AA2&lang=en)

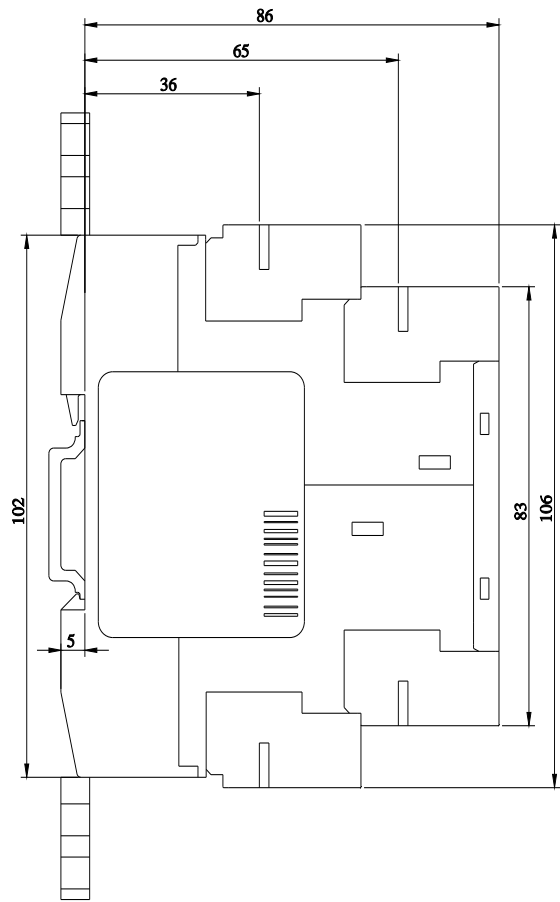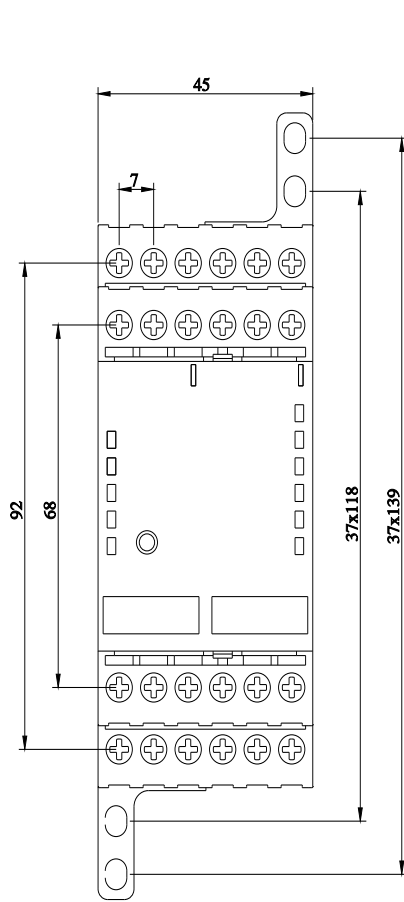

last modified:

9/5/2023 