


## Bare Ferrule For 2/0 AWG

By Burndy  
Catalog # YF2/032UIL

Bare Ferrule For 2/0 AWG.

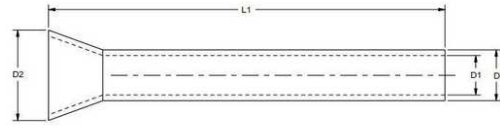

### Features

- Made of electrolytic copper, tin plated
- Seamless barrels
- Smooth funnel entry to make wire insertion easier
- UL listed per UL486F requirements
- RoHS Compliant

### Application

For Use On Copper Conductor

### General

|                   |                      |
|-------------------|----------------------|
| Connector Type    | End Termination      |
| EU RoHS Indicator | Yes                  |
| Insulation        | N                    |
| Material          | Copper               |
| Plated            | Y                    |
| Plating Type      | Tin - Electro Plated |
| Sub Brand         | FERRULES             |
| Type              | Bootlace Ferrule     |
| UPC               | 621945623453         |

### Dimensions

|                                 |         |
|---------------------------------|---------|
| Dimension - D inch              | 0.56 in |
| Dimension - D1 inch             | 0.53 in |
| Dimension - D2 inch             | 0.62 in |
| Dimension - Length Overall inch | 1.26 in |

### Conductor Related

|                               |         |
|-------------------------------|---------|
| Conductor - Copper Solid Size | 2/0 AWG |
| Conductor - Copper Str Size   | 2/0 AWG |
| Conductor Size                | 2/0 AWG |

### Certifications and Compliance

|                                    |    |
|------------------------------------|----|
| Certification - CSA Approved       | No |
| Certification - ETL                | No |
| Certification - UL Recognized      | No |
| Certification - cULus              | No |
| Standards - RoHS Compliance Status | CM |
| UL Listed                          | No |

### Logistics

|                       |       |
|-----------------------|-------|
| Carton Quantity       | 50    |
| Minimum Pack Quantity | 50    |
| Pallet Quantity       | 23200 |

### Product Assets

[Catalogs - Full Line BURNDY Catalog](#)  
[Sales Drawings - 50111874](#)