


Bare Ferrule For 250 kcmil

By Burndy
Catalog # YF25040UIL

Bare Ferrule For 250 kcmil.

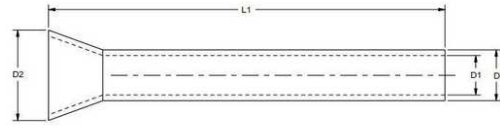

Features

- Made of electrolytic copper, tin plated
- Seamless barrels
- Smooth funnel entry to make wire insertion easier
- UL listed per UL486F requirements
- RoHS Compliant

Application

For Use On Copper Conductor

General

Connector Type	End Termination
EU RoHS Indicator	Yes
Insulation	N
Material	Copper
Plated	Y
Plating Type	Tin - Electro Plated
Sub Brand	FERRULES
Type	Bootlace Ferrule
UPC	621945623491

Dimensions

Dimension - D inch	0.81 in
Dimension - D1 inch	0.77 in
Dimension - D2 inch	0.91 in
Dimension - Length Overall inch	1.57 in

Conductor Related

Conductor - Copper Solid Size	250 kcmil
Conductor - Copper Str Size	250 kcmil
Conductor Size	250 KCMIL

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

Logistics

Carton Quantity	25
Minimum Pack Quantity	25
Pallet Quantity	11600

Product Assets

[Sales Drawings - 50111874](#)