

Technical Information Bulletin


LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 68003
Description: LED/A19/S2/9W/40K/STD 4P
UPC: 69549680036
Case quantity: 1 / 96

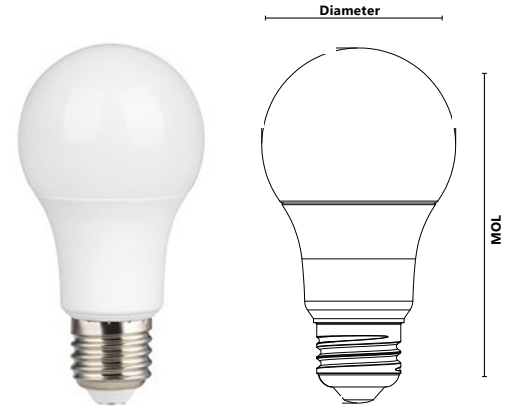

MOL : 4 1/4 in. (108 mm)

Dia. : 2 3/8 in. (60 mm)

PERFORMANCE DATA

Shape: A19
Wattage (W): 9
Base: E26
Lamp voltage (VAC): 120
Colour temperature (K):** 4 000
Life L70 (hrs): 25 000
Initial lumens (lm)*: 800
Initial lumens per watt (lm/W): 89
CRI: 80
Beam angle (°): 220
Power factor: 0.70
Operating temperature range: - 30 °C / - 22 °F to 40 °C / 104 °F

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.

COMPATIBLE DIMMERS

Brand	Model
Lutron	PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P
Cooper	RRD-6NA, AAL06
Leviton	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
Legrand	RH703PTUTC

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.