



Sunlux® EN Sunlux®

- Medium and mogul base lamps in a wide range of wattages
- Nickel-plated base will not seize in the socket
- Constructed with EYE specified, critical to performance arc tube materials (PCA-ceramic tube, frit sealing glass, electrode emitter)
- Sunlux EN lamps pass the EPA TCLP test criteria as non-hazardous waste
 - Lead free base
 - Low mercury content

Long life performance


All EYE high pressure sodium lamps are designed and manufactured to EYE quality specifications to ensure long life performance (up to 24 000+ hours rated life).

Applications

- Roadway/streets
- Parking lots
- Industrial
- Warehouses



Sunlux® EN Sunlux®

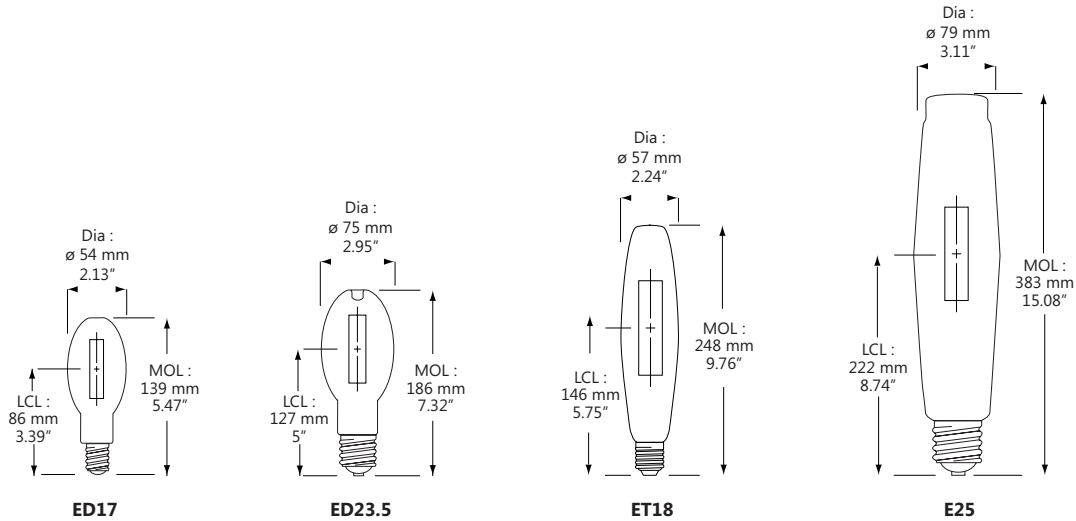

Order code	Description	Watts (W)	Shape	Base	ANSI code	Colour temp. (K)	CRI	Average life (hrs)	Initial lumens (lm)	Mean lumens (lm)	Burn pos.	Finish	Case qty
Sunlux													
62654	LU35/MED LT EYE	35	ED17	E26	S76	1 900	22	16 000	2 250	2 050	U	Clear	12
62657	LU50/MED LT EYE	50	ED17	E26	S68	1 900	22	24 000	4 000	3 600	U	Clear	12
62659	LU70/MED LT EYE	70	ED17	E26	S62	1 900	22	24 000	6 300	5 350	U	Clear	12
62648	LU100/MED LT EYE	100	ED17	E26	S54	2 100	22	24 000	9 500	8 000	U	Clear	12
62651	LU150/MED LT EYE	150	ED17	E26	S55	2 100	22	24 000	15 800	13 400	U	Clear	12
Sunlux EN													
62656	LU 50/EN LT EYE	50	ED23.5	E39	S68	1 900	22	24 000 +	4 000	3 600	U	Clear	12
62658	LU70/EN LT EYE	70	ED23.5	E39	S62	1 900	22	24 000 +	6 300	5 500	U	Clear	12
62646	LU100/EN LT EYE	100	ED23.5	E39	S54	1 900	22	24 000 +	9 500	8 000	U	Clear	12
62650	LU150/55/EN LT EYE	150	ED23.5	E39	S55	1 900	22	24 000 +	16 000	13 800	U	Clear	12
62652	LU200/EN LT EYE	200	ET18	E39	S66	2 100	22	24 000 +	22 000	19 800	U	Clear	12
62653	LU250/EN LT EYE	250	ET18	E39	S50	1 900	22	24 000 +	28 000	26 100	U	Clear	12
62655	LU400/EN LT EYE	400	ET18	E39	S51	1 900	22	24 000 +	50 000	45 000	U	Clear	12
62649	LU1000B/EN LT EYE	1 000	E25	E39	S52	2 100	25	24 000 +	140 000	126 000	U	Clear	6

WARNING: For warnings and operating instructions please see the EYE Lighting product catalog. All information subject to change without notice.