



Transformer Specifications			
PRIMARY VOLTAGE(S)	230x460 (TRIPLY RATED)		
SECONDARY VOLTAGE(S)	115		
RATED VA	200		
RATED FREQUENCY	50/60		
INSULATION CLASS	130		
AGENCY APPROVALS	UL, CUL		
ESTIMATED WEIGHT	8.9 LBS		


TEST REQUIREMENTS			
WINDING	H4-H3	H2-H1	X2-X1
DC VOLTS	240	240	130.4
LOAD VOLTS	240	240	120
R.T. AMPS	0.530	0.530	1.667
H.T. POT.	3000V		1800V
EXCITING AMPS	0.42AMPS @ 240 VOLTS, 50HZ		
EXCITING WATTS	200		



NOTE:  
1. ALL MEASUREMENTS IN INCHES (MM)



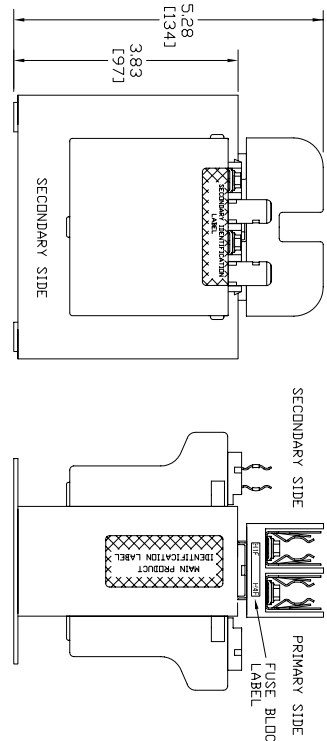PRIMARY IDENTIFICATION LABEL

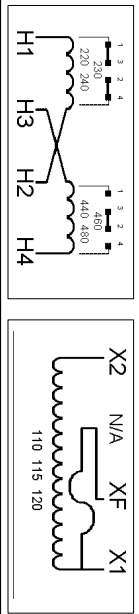

REVISION  
DT11109

UNLESS OTHERWISE SPECIFIED	DIMENSIONS IN INCHES	
ONE PLACE DEC	40.1	
TWO PLACE DEC	4.005	
THREE PLACE DEC	40.5	
ANGLES	40.5	
VOLTAJE	42%	
AMPERAGE	42%	
FORCE/TORQUE/SPEED	42%	
TEMPERATURE	42%	
DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH ASME Y14.5M-1994		
(2X) SEE DIMENSIONS		
(9) TURN ANGLE PROJECTION		

INDUSTRIAL TRANSFORMER	200VA	50/60Hz	TEMP CL. 130°C	35081
CAT. NO.	C0200E2AFB	SERIES 2		
INDUSTRIAL TRANSFORMER	200 VA	50/60 Hz	TEMP CL. 130°C	35081
CAT. NO.	C0200E2AFB	SERIES 2		

DATE	11/06/08	DESIGNER	S. CASTRO
DATE	11/06/08	ENGINEER	C. CASTORENA
DATE	11/06/08	ENGR. REF.	
DATE		TOOL REF.	
DATE		DSPEC	

SIZE	B	DWG NO.	C0200E2AFB
SCALE		PARTS LIST	
PRODUCT CODE		SHEET NO.	1 OF 1

© 2008 Eaton Corporation. All rights reserved.