

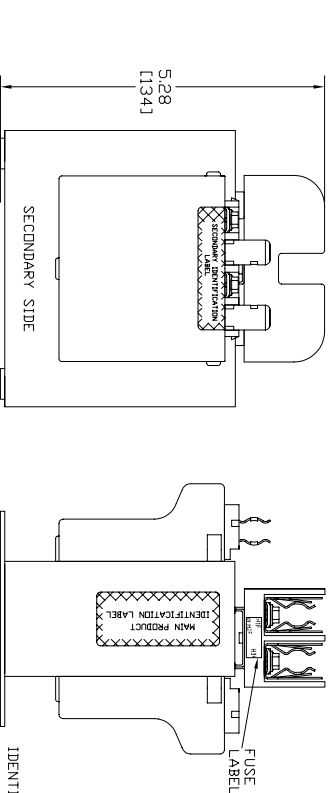




Transformer Specifications	
PRIMARY VOLTAGE(S)	208 / 277
SECONDARY VOLTAGE(S)	120
RATED VA	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL/CUL

TEST REQUIREMENTS	
WINDING	H2-H2-H1 X2-X1
D.C. VOLTS	208.1-277 129.6
LOAD VOLTS	208-277 120
F.L. AMPS	129.9 167.0
H1-POT	3000V 1800V
EXCITING AMPS	0.57AMPS @ 277 VOLTS, 50HZ
EXCITING WATTS	25.7MAX

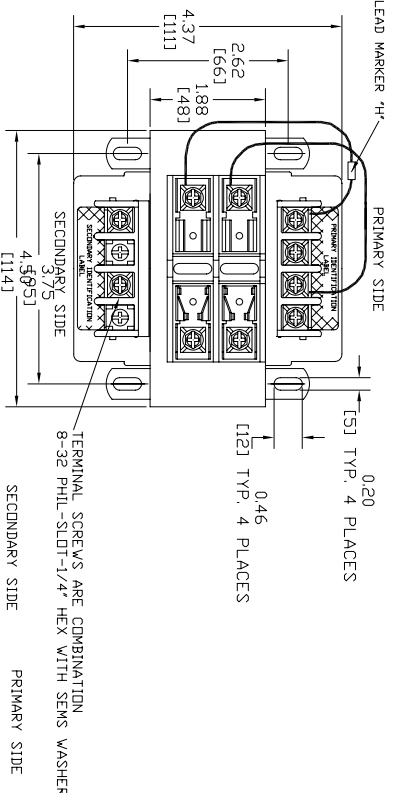

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

Chlor-Hammer INDUSTRIAL CONTROL TRANSFORMER
 200VVA 50/60HZ
 TEMP CL. 130°C
 CAT. NO. C0200E3AFB
 SERIES 2
 B200-2228-8F



REVISION	DT	DATE	BY	APPD	DATE	ENGR REF	DRFR/DESIGNER	DATE	SCALE	SIZE	PRODUCT CODE	SHEET NO
1				S. CASTRO	07/01/09		S. CASTRO	07/01/09	B	C0200E3AFB.DWG	C0200E3AFB	1 OF 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES
 ONE PLACE DEC. 4.0 / 10 / 16
 TWO PLACE DEC. 4.00 / 10.00 / 16.00
 ANGLES 45° 90°
 RESISTANCE ±10%
 APPEARANCE ±2%
 TOLERANCE SPEED ±1%
 TEMPERATURE ±1V/±5%
 DIMENSIONS TO BE INTERFERED AS SHOWN
 ASME Y14.5M 2004
 (X) FOR CLASSIFICATION PER DRAWING 6842750
 (S) PER DRAWING 6842750
 THIRD ANGLE PROJECTION

Eaton Corporation - CONFIDENTIAL AND PROPRIETARY
 THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, AND IS INTENT ON LOW AND SUBJECT TO RECALL BY Eaton. At any time, without notice, Eaton reserves the right to modify this document and its contents. Reproduction without the prior written consent of Eaton, in the case of conflicting information, provisions, this notice shall govern the status of this document.

© 2008 Eaton Corporation. All Rights Reserved