



MODEL SHOWN: DL4-12W-WH



MODEL SHOWN: DL6-15W-WH




* Not available on DL6-15W-C-WH


FEATURES

- CCT Select - 3 position switch (30 K, 35 K, and 40 K) is accessible from below the ceiling
- 900 lumens delivered on the 4" model
- 1200 lumens delivered on the 6" model or 1520 lumens with 0-10V dimming, 120-277V
- Fits into an existing pancake box
- Can be installed into a standard 4" octagon box or into an existing 4" housing
- Fire-rated when installed in a fire-rated box
- Durable airtight aluminum body
- Polycarbonate diffuser lens for low glare
- 90+CRI
- Wet location rated
- Title 24, JA8 and Energy Star compliant

RETROFIT A TRADITIONAL 4" POTLIGHT

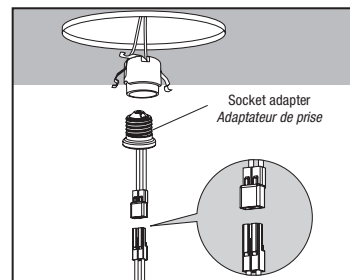

CONVERT A STANDARD OR PANCAKE TYPE OCTAGON BOX

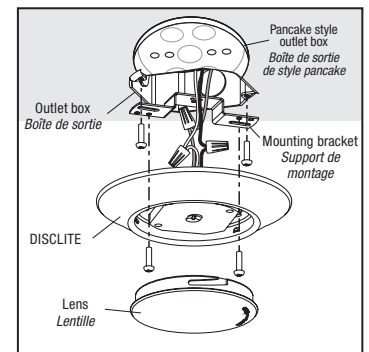

FIRE-RATED CEILING? NO PROBLEM!

- Installs into standard or super shallow (pancake) octagon boxes that are fire-rated
- Pancake boxes can be installed directly over a joist as they are typically 1/2" deep

