

SLIMLED™

Recessed Light


SUPER THIN LED TECHNOLOGY



SLM4
4" × ½"
9W / 120V
Up to 680 LUMENS



SLM6
6" × ½"
12W / 120V
Up to 840 LUMENS

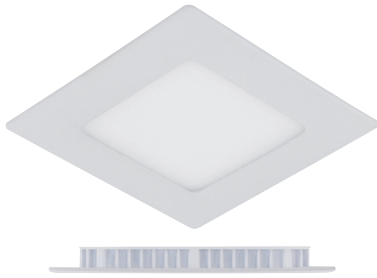


SLM4S
4" Square × ½"
9W / 120V
Up to 610 LUMENS



SLM6S
6" Square × ½"
12W / 120V
Up to 820 LUMENS

The SLIMLED is a high performance, easy to install down light. No recessed housing required. One-half inch thick, it fits almost anywhere. With its slim design, it's the perfect lighting solution when you have joists or duct work in the way. In addition, with 120 degree beam spread, you no longer need to worry about dark shadows on the wall making this fixture a great solution for corridors and low ceiling applications. Airtight, rated for direct contact with insulation, this fixture is the perfect choice for most lighting applications, soffits, drop ceilings, all general lighting applications. Comes with three "Quick connect" push-in terminals for fast and easy wiring, dimmable driver is included.

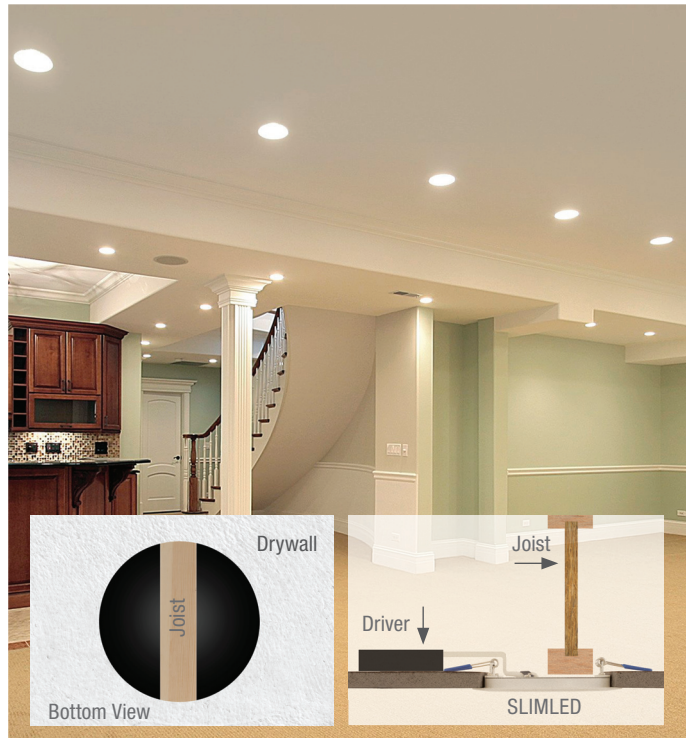

Dimmable



Damp Location



120° Beam Angle




Colour Rendering Index



2700°K / 3000°K / 3500°K / 4000°K Colour Temperature

Colour Options

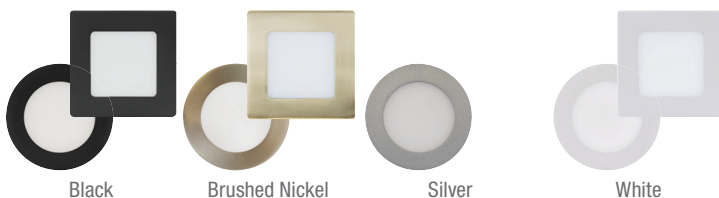


For more information on Lifetime Warranty program, please visit www.liteline.com/goldlabel






LITELINE CORPORATION | www.liteline.com
P 416-996-1856 | 1-866-730-7704
F 905-709-5255 | 1-888-738-9736

Ordering Guide



Part #	Description	UPC	Case Qty.	Master Qty.
SlimLED™ Kits				
4" Round Kit, 9W, 500 Lumens				
SLM4-27-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, white.	771250035721	12	48
SLM4-30-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, white.	771250975348	12	48
SLM4-35-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, white.	771250191427	12	48
SLM4-40-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, white.	771250975355	12	48
SLM4-27-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, brushed nickel.	771250035738	12	48
SLM4-30-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, brushed nickel.	771250975362	12	48
SLM4-35-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, brushed nickel.	771250191403	12	48
SLM4-40-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, brushed nickel.	771250975379	12	48
SLM4-27-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, black.	771250035745	12	48
SLM4-30-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, black.	771250977519	12	48
SLM4-35-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, black.	771250191397	12	48
SLM4-40-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, black.	771250977526	12	48
SLM4-27-SL	4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, silver.	771250191373	12	48
SLM4-30-SL	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, silver.	771250191380	12	48
SLM4-35-SL	4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, silver.	771250191410	12	48
SLM4-40-SL	4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, silver.	771250191434	12	48
4" Square Kit, 9W, 500 Lumens				
SLM4S-30-WH	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, white.	771250977533	12	48
SLM4S-40-WH	4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, white.	771250977540	12	48
SLM4S-30-BN	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, brushed nickel.	771250977557	12	48
SLM4S-40-BN	4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, brushed nickel.	771250977564	12	48
SLM4S-30-BK	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, black.	771250010254	12	48
SLM4S-40-BK	4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, black.	771250010261	12	48
6" Round Kit, 12W, 700 Lumens				
SLM6-27-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, white.	771250191472	12	24
SLM6-30-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, white.	771250975386	12	24
SLM6-35-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, white.	771250191526	12	24
SLM6-40-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, white.	771250975393	12	24
SLM6-27-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, brushed nickel.	771250191458	12	24
SLM6-30-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, brushed nickel.	771250975409	12	24
SLM6-35-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, brushed nickel.	771250191502	12	24
SLM6-40-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, brushed nickel.	771250975416	12	24
SLM6-27-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, black.	771250191441	12	24
SLM6-30-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, black.	771250010278	12	24
SLM6-35-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, black.	771250191496	12	24
SLM6-40-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, black.	771250010285	12	24
SLM6-27-SL	6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, silver.	771250191465	12	24
SLM6-30-SL	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, silver.	771250191489	12	24
SLM6-35-SL	6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, silver.	771250191519	12	24
SLM6-40-SL	6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, silver.	771250191533	12	24



Part #	Description	UPC	Case Qty.	Master Qty.
6" Square Kit, 12W, 700 Lumens				
SLM6S-30-WH	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, white.	771250977571	12	24
SLM6S-40-WH	6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, white.	771250977588	12	24
SLM6S-30-BN	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, brushed nickel.	771250977595	12	24
SLM6S-40-BN	6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, brushed nickel.	771250977601	12	24
SLM6S-30-BK	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, black.	771250010315	12	24
SLM6S-40-BK	6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, black.	771250010322	12	24
SlimLED™ (Sold Separately)				
4" Round (Fixture only), 9W, 500 Lumens				
SLM4F-9W27K-WH	4" Round SlimLED (fixture only), 9W, 2700°K, white. Requires SLM-DVR-9W.	771250111586	12	48
SLM4F-9W30K-WH	4" Round SlimLED (fixture only), 9W, 3000°K, white. Requires SLM-DVR-9W.	771250975997	12	48
SLM4F-9W40K-WH	4" Round SlimLED (fixture only), 9W, 4000°K, white. Requires SLM-DVR-9W.	771250976000	12	48
SLM4F-9W27K-BN	4" Round SlimLED (fixture only), 9W, 2700°K, brushed nickel. Requires SLM-DVR-9W.	771250111579	12	48
SLM4F-9W30K-BN	4" Round SlimLED (fixture only), 9W, 3000°K, brushed nickel. Requires SLM-DVR-9W.	771250976017	12	48
SLM4F-9W40K-BN	4" Round SlimLED (fixture only), 9W, 4000°K, brushed nickel. Requires SLM-DVR-9W.	771250976024	12	48
SLM4F-9W27K-BK	4" Round SlimLED (fixture only), 9W, 2700°K, black. Requires SLM-DVR-9W.	771250111562	12	48
SLM4F-9W30K-BK	4" Round SlimLED (fixture only), 9W, 3000°K, black. Requires SLM-DVR-9W.	771250010230	12	48
SLM4F-9W40K-BK	4" Round SlimLED (fixture only), 9W, 4000°K, black. Requires SLM-DVR-9W.	771250010247	12	48
9W Drivers only				
SLM-DVR-9W	9W LED driver, or use with 4" SlimLED series.	771250975973	12	48
6" Round (Fixture only), 12W, 700 Lumens				
SLM6F-12W30K-WH	6" Round SlimLED (fixture only), 12W, 3000°K, white. Requires SLM-DVR-12W.	771250976031	12	24
SLM6F-12W40K-WH	6" Round SlimLED (fixture only), 12W, 4000°K, white. Requires SLM-DVR-12W.	771250976048	12	24
SLM6F-12W30K-BN	6" Round SlimLED (fixture only), 12W, 3000°K, brushed nickel. Requires SLM-DVR-12W.	771250976055	12	24
SLM6F-12W40K-BN	6" Round SlimLED (fixture only), 12W, 4000°K, brushed nickel. Requires SLM-DVR-12W.	771250976062	12	24
SLM6F-12W30K-BK	6" Round SlimLED (fixture only), 12W, 3000°K, black. Requires SLM-DVR-12W.	771250010292	12	24
SLM6F-12W40K-BK	6" Round SlimLED (fixture only), 12W, 4000°K, black. Requires SLM-DVR-12W.	771250010308	12	24
12W Drivers only				
SLM-DVR-12W	12W LED driver, for use with 6" SlimLED series.	771250975980	12	48
Accessories*				
SLM-60-FC	60" Flexible connector, for use with SlimLED fixtures.	771250976079	12	48
P-4020	4" Pre-mounting plate, for use with SLM4 series.	771250977397	-	50
P-4020S	4" Pre-mounting plate, for use with SLM4S series.	771250977410	-	50
P-6020	6" Pre-mounting plate, for use with SLM6 series.	771250976093	-	30
P-6020S	6" Pre-mounting plate, for use with SLM6S series.	771250977403	-	30
P-NCMK-1	New construction mounting bracket, includes hanger bars, brackets and screws.	771250224316	-	64
SLM4-XLRING-WH	Extra large trim ring, for use with SLM4 series, plastic, white.	771250195371	12	48
SLM6-XLRING-WH	Extra large trim ring, for use with SLM6 series, plastic, white.	771250195388	12	24
VBE-1	Vapour barrier extender for 4" & 6" fixtures. For use in new construction applications.	771250904942	-	50
VBE-2	Vapour barrier extender for 4" fixtures. For use in remodel applications.	771250971388	-	50
VBE-3	Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.	771250976086	-	50
VBE-4	Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.	771250190895	-	50

* Not included in Lifetime Warranty program