


Ultraflex -60°C Portable Cord (Bulk)

PVC/PVC

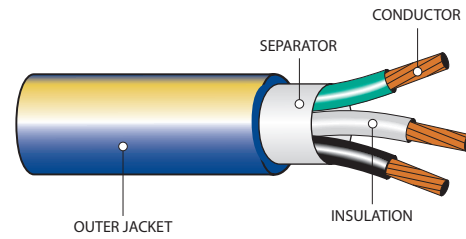

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL62
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Stranded soft bare copper

Insulation: Lead free Polyvinyl Chloride (PVC), full extrusion (fillerless)

Outer Jacket: -60°C to 60°C flame-retardant (FR) Polyvinyl Chloride (PVC), blue with yellow stripe

Options: Other coloured outer jacket and constructions available upon request
Available in 76m, 152m, and 305m packages

SJTOW 300V

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01004-08-047	3	14	41	0.030	0.762	0.375	9.525	85	127
01004-11-047	3	12	65	0.030	0.762	0.440	11.176	117	174

STOW 600V

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01031-05-047	3	14	41	0.045	1.143	0.538	13.665	137	204
01031-10-047	3	12	65	0.045	1.143	0.609	15.469	205	305
01031-15-047	4	10	104	0.045	1.143	0.745	18.923	345	513

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity