




Bolts

MACHINE BOLTS

Square Head Machine Bolts complete with Square Nuts *Cont'd*

Cat.No.	L	T	Std. Pkg.	Wt.-lbs./ C
5/8" Diameter Bolts:				
258M	2	1-1/2	25	38
358M	3	1-1/2	25	45
458M	4	1-1/2	25	54
558M	5	1-1/2	25	62
658M	6	1-1/2	50	70
858M	8	4	50	86
1058M	10	4	50	102
1058M-8	10	8	50	102
1258M	12	6	50	115
1458M	14	6	50	130
1658M	16	6	50	145
1858M	18	6	25	160
2058M	20	6	25	175
2258M	22	6	25	190
2458M	24	6	25	208
2658M	26	6	25	226
2858M	28	6	25	235
3/4" Diameter Bolts:				
634M	6	1-3/4	50	102
834M	8	4	50	130
1034M	10	4	50	150
1234M	12	6	50	175
1434M	14	6	25	200
1634M	16	6	25	225
1834M	18	6	25	245
2034M	20	6	25	270
2234M	22	6	25	300
2434M	24	6	25	320
2634M	26	6	25	340

Other sizes available upon request.

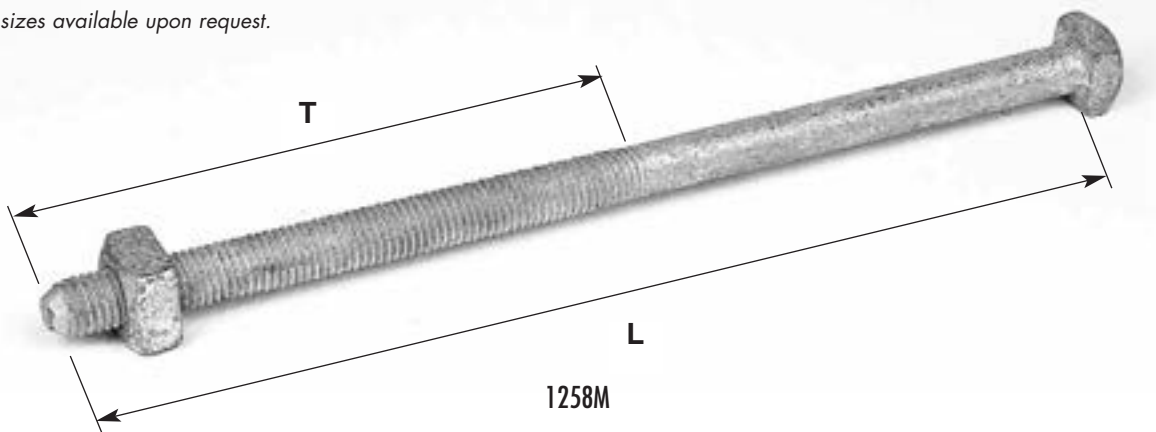



Communication Hardware

CLAMPS & POLE STEPS

Parallel Groove Clamp

Top and bottom castings are malleable iron, Hot dip galvanized.
Spacer is tinned bronze for use on aluminum and copper.

Cat.No.	Cable Sizes		Std.Pkg.	Wt.-lbs./ C
	Maximum	Minimum		
4468PGC-38	4/0-4/0 Str	# 6 SOL - # 8 SOL	100	56



4468PGC-38

Standard Pole Step

Threads are fetter drive-driving surface is flat.

Cat.No.	D	L	Std. Pkg.	Wt.-lbs./ C
10SPS	5/8"	10"	50	90



10SPS

Wire Clip

Made of 16 gage galvanized steel.

Cat.No.	Hole Size	Wire Size	Std. Pkg.	Wt.-lbs./ C
1CDW	3/16	5/16	500	1



1CDW

Clamp

Lashing Wire Clamp - Galvanized formed steel clamp used to terminate the cable lashing wire.

Cat.No.	Strand Size	Std. Pkg.	Wt.-lbs./ C
LWC10	1/4 - 7/16	100	3



LWC10

Dead End Clamp

For Copper wire and ACSR.

Cat.No.	Description	No. of Clamps	Std. Pkg.	Wt.-lbs./ C
610DC	6 SOL Copper - 1/0 str. copper	1	100	55



610DC

1 3/4

1 1/4