

# SD Series



METER  
SOCKETS

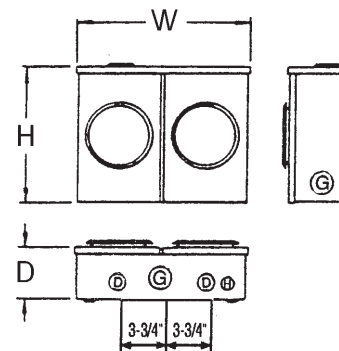
## 100 AMP - MULTI POSITION 200 Amp Main

CATALOGUE #	TYPE	DESCRIPTION	DIMENSIONS (IN.)			WEIGHT
			H	W	D	
<b>SD220PW</b>	O/H & U/G	2 gang, 200 Amp main, 100 Amp per position	12	15	5	20 lbs.
<b>SD320PW</b>	O/H & U/G	3 gang, 200 Amp main, 100 Amp per position	12	22 1/2	5	28 lbs.
<b>SD420PW</b>	O/H & U/G	4 gang, 200 Amp main, 100 Amp per position	12	30	5	36 lbs.
<b>SD520PW</b>	O/H & U/G	5 gang, 200 Amp main, 100 Amp per position	12	37 1/2	5	44 lbs.
<b>SD620PW</b>	O/H & U/G	6 gang, 200 Amp main, 100 Amp per position	12	45	5	52 lbs.

- Factory bussed - 200 Amp Mains
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- 100 Amp - 600 VOLTS per position
- CSA enclosure 3R
- Approved conductor range:  
Line No. 6-250 MCM CU/AL  
Load No. 6-1/0 AWG CU/AL
- Approved for overhead or underground use

- Field adaptable accessories
- 5th Jaw at 9 O'clock - **SXK503**
- For overhead order **SXC** hub separate
- Add suffix "RH" for right hand entry
- Add suffix "BC" for c/w 1 - 3" KO in the bottom

KNOCKOUT CODE	CONDUIT SIZE
<b>D</b>	1 1/4", 1 1/2", 2"
<b>G</b>	1 1/4", 1 1/2", 2", 2 1/2"
<b>AA</b>	1/2"



### **SD220 Conversion Kit**

To convert existing SD220PW to a two load single meter, meter socket ST911 - OH


# 2 1/2" Bungalow Service

## ENTRANCE STACKS & ACCESSORIES




MAST AND ACCESSORIES

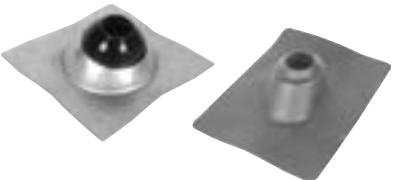
### Service Entrance Top Cap

CATALOGUE #	DESCRIPTION	
2521 2521-2	1 1/4" entrance cap, 100 Amp, completely weatherproof. Extra large (-2) cap for 200 Amp service	


### Triplex Cable Rack

CATALOGUE #	DESCRIPTION	
2517U 2518U 417U	200 Amp spool rack - heavy duty, c/w insulator 100 Amp spool rack - light duty, c/w insulator 400 Amp spool rack - oversize 3" to 4" pipe	
2513 2515 25C	Drop wire hook bracket Guy attachment with eye bolt Mast ground clamp #8 - 1/0	

### Weatherproof Roof Flange - Adjustable to Roof Pitch

CATALOGUE #	DESCRIPTION	
2506 2506NB 2526NB 2506N 2506-3 2506N2	Complete with undereave flashing & rubber collar All neoprene roof flange - One piece construction Steel roof flange with neoprene collar - two peice const. As 2526NB but c/w undereave flashing Undereave flashing only Neoprene collar only	

### Stack Clamp for Surface Mounting

CATALOGUE #	DESCRIPTION	
2516 2516L 2516L-4	Stack clamp for surface mounting Same as above but complete with 2 lag screws 3/8" x 3" As above c/w 3/8" x 4" Lags	

### Thru Bolt Stack Clamp

CATALOGUE #	DESCRIPTION	
2504 2504-6 2504-12 2504LB 2505 2014U	Clamp assembly for mounting stack on brick, concrete block, etc. Complete with 4" x 4" galvanized washer and 5/8" 10 bolt with 8" of thread As above but with 6" bolt As above but with 12" bolt As above less thru bolt and washer As above but with 5/8" x 4 1/2" bolt, std. thread for wood frame wall U-bolt rafter clamp 1/2"	