




# USOC XCELERATOR™ Jack

By Hubbell Premise Wiring  
Catalog Number [HXJUB](#)

Telephone/Data, Jack, XCELERATOR, USOC 6-Position.

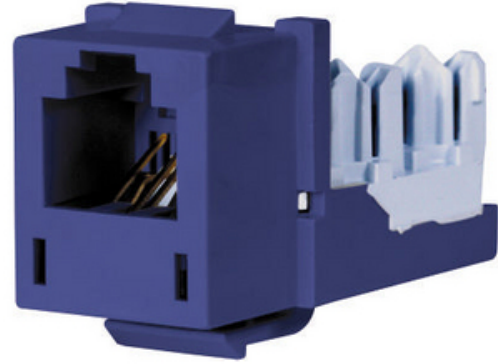

## Features

- RJ-25 USOC (RJ-25) Jack
- Exclusive 1-Punch Termination Reduces Termination Time by 75%
- Mating Cycles Exceed Industry Standard by Four Times
- Bulk Packaging Reduces Excess Waste on the Job

## Application

Telephone

## General

Color	Blue
Construction Material - Main	Thermoplastic
Contact	IDC: Phosphor Bronze with 100 Micro-Inch Tin Over Plating
Contact Point Material	Beryllium Copper with Gold Over Plating
EU RoHS Indicator	Yes
Environmental Conditions	Indoor Dry Unless Protected By Additional Means
Item Type	Modular Jack
Material - Housing	High-impact thermoplastic (UL 94V-0)
Material - Mounting Hardware	Keystone
Mounting Type	Snap-fit
Operating Cycles	2000 Plug
Performance	USOC
Series	USOC
Size	0.86 (22) x 0.67 (17) x 1.29 (33)
Style	RJ-45 Jack
Temperature Rating	Max Continuous- 75° C, Minimum- -40° C Without Impact
Type	Modular Jack
UPC	662620824703

## Dimensions

Display Size Standard Sized Product

## Electrical Ratings

Connectivity	RJ45 Jack to IDC Punch Down
Contact Resistance	100 Ohm
Withstand Voltage	1,000 Vac @ 60 Hz

## Certifications and Compliance

Industry Standard(s)	<ul style="list-style-type: none"><li>• 6-Position USOC Compliant</li><li>• CSA Certified</li><li>• Mechanical TIA-568-C.2</li><li>• RoHS Compliant</li><li>• UL Listed 1863</li></ul>
----------------------	--

## Logistics

Carton Quantity	25
Number of Pieces in Package	1

## Product Assets

[Catalog Page - Premise Catalog Page B-5](#)



A proud member of the Hubbell Family.

©2023 Hubbell Incorporated. All rights reserved.  
PREM\_CA-HXJUB-SPEC-EN | REV 5/2023

