





SP

Features

Color

- Standard: white, metallic charcoal.
- Optional (upcharge applicable): almond, metallic silver,
- bronze, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

Finish

• Standard: epoxy/polyester powder paint.

Voltage

- 240/208V, 50/60 Hz, 1-phase.
- Construction
- 20-gauge steel.
- Warm air outlet that directs the air to the centre of the room.
- Bar grilles prevent insertion of foreign objects; smooth-finish paint is washable.
- High-limit temperature control with automatic reset.

Heating element

• 2 quiet aluminum monoblock elements.

Watt density

• 700W/ft. (2320W/m).

Control

• Built-in non programmable electronic thermostat (-THO models). 1

Installation

- 4 in. (102 mm) minimum clearance to floor and from an adjacent wall.
- Quick surface-mounted installation, with the included wall mounting bracket.

Warranty

• 5-year warranty against defects.

(The warranty is valid only if the heater is controlled by a proportional pulsing electronic thermostat with a cycle of 15 seconds maximum.)

Application


• Kitchen, living room, family room, bedroom, basement.

Models

		Product #	Product #	Length		Weight	
Watts	Volts	Without Thermostat ¹	Non Programmable Integrated Thermostat	in.	mm	lb	kg
500/375	240/208	OCT0500	OCT0500-THO	18	457	13	6
750/563	240/208	OCT0750	OCT0750-THO	20 3/4	527.5	15.5	7
1000/750	240/208	OCT1000	OCT1000-THO	23 9/16	598	16.7	7.6
1250/938	240/208	OCT1250	OCT1250-THO	26 5/16	668.5	18.7	8.5
1500/1125	240/208	OCT1500	OCT1500-THO	29 1/16	739	20	9.1
1750/1313	240/208	OCT1750	OCT1750-THO	31 7/8	809.5	22	10
2000/1500	240/208	OCT2000	OCT2000-THO	34 5/8	880	24	10.9

¹ The OCT warranty is valid only if the heater is controlled by a proportional electronic pulsing line thermostat with a cycle of 15 seconds maximum. Add "BL" for white, "CM" for metallic charcoal. Upcharge available for optional colors shown in the color chart section.



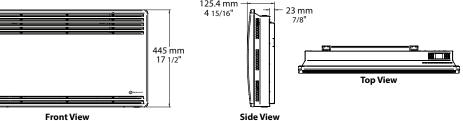

Front View