


OSR-NA All Purpose Self-Regulating Heating Cable ELSR-NA

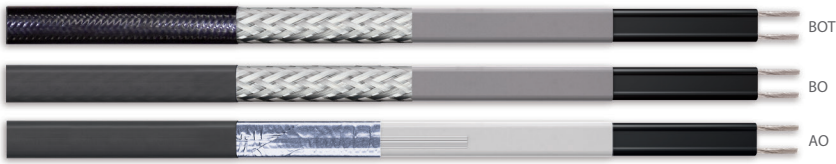

Features

Outer jacket

- Thermoplastic (AO, BO), Fluoropolymer (BOT).

Bus wire

- Nickel plated copper, 16 AWG.

Minimum start-up temperature

- -30 °C (-22 °F).

Maximum operating temperature (power on)

- 60 °C (140 °F).

Maximum continuous exposure temperature (power off)

- 80 °C (176 °F).

Nominal voltage

- 120V, 240/208V.

Bending radius, minimum

- 25 mm (1 in.).

Installation temperature, minimum

- AO, BO: -45 °C (-45 °F).
- BOT: -25 °C (-13 °F).

Classification

- II 2G Ex e IIC T6 Gb II 2D Ex tb IIIC.
- T 80 °C Db.
- Class I, Division 2, Groups A, B, C, D.

- Class II, Division 2, Groups E, F, G.
- Class III, T6.
- Class I, Zone 1, AEx / Exe II, T6.
- Class 1, Division 1, Groups B, C, D (Contact manufacturer).

Standards

- CSA C22.2.130.03; -WS.
- CAN/CSA 60079-7:12, 60079-0-11.
- ANSI/IEEE 515, 515.

Certification

- IECEx EPS 12.0006U.
- 12ATEX1431U.
- CSA C US 2547790.

Rating

- Wet rated, for outdoor use (WS).

Warranty

- 1-year basic warranty on the heating cable.

Application

- Freeze protection, heat tracing instrumentation, pipes, vessel and tanks, chemical and petrochemical industries, food processing, automotive, roof and gutter, sprinkler systems.

Models

Nominal Output W/ft.	Product # ^{1,3} 120V	Outer jacket/Mechanical shield			Nominal Output W/ft.	Product # ^{1,2,3} 240V	Outer jacket/Mechanical shield			Cable dimension approx. (mm)
		AO	BO	BOT			AO	BO	BOT	
3	ELSR-NA-3-1-XX	✓	✓	✓	4	ELSR-NA-4-2-XX	-	-	✓	13.8 x 5.6
5	ELSR-NA-5-1-XX	✓	✓	✓	6	ELSR-NA-6-2-XX	✓	✓	✓	13.8 x 5.6
7	ELSR-NA-7-1-XX	✓	✓	✓	8	ELSR-NA-8-2-XX	✓	✓	✓	14.1 x 5.6
-	-	-	-	-	10	ELSR-NA-10-2-XX	✓	✓	✓	14.1 x 5.6

Custom Cut⁴

Product #	Description
OSR-CUT	Cutting fee for all lengths other than 500 ft. and 1000 ft. (25 ft. minimum)

¹ XX = Outer jacket/Mechanical shield.

AO Aluminum foil and a thermoplastic outer jacket.

BO Protective braid and a thermoplastic outer jacket.

BOT Protective braid and a fluoropolymer outer jacket.

² For operations at 208V, please consult Correction Factors/Multipliers at next page.

³ When ordering, the quantity on the purchase order is equal to the length in feet of the cable required.

E.g.: To order a 500 ft., cable, write 500 for quantity with product code.

⁴ Custom cutting service available with cutting fee (OSR-CUT) for all lengths other than 500 ft. and 1000 ft. (minimum of 25 ft.).

E.g.: To order a 75 ft., cable, write 75 for quantity with product code and add the product code OSR-CUT on another line.

Options

See OSR Options and Controls section

OSR-NA

Heating circuit length for ELSR-NA models

Start-up temperature	CB capacity (A)	120V		
		Maximum heating circuit (ft.) for		
		ELSR-NA-3-1	ELSR-NA-5-1	ELSR-NA-7-1
10 °C (50 °F)	10	159	125	82
	15	238	187	123
	20	317	249	164
	25	397	312	205
	30	476	374	246
	35	555	436	287
0 °C (32 °F)	40	612	499	328
	10	143	112	75
	15	215	168	113
	20	287	224	151
	25	358	280	188
	30	430	336	226
-10 °C (14 °F)	35	502	392	264
	40	573	448	301
	10	130	102	69
	15	195	153	104
	20	260	204	139
	25	325	255	173
-30 °C (-22 °F)	30	390	306	208
	35	455	357	243
	40	520	408	277
	10	110	87	60
	15	165	130	90
	20	220	173	120
	25	275	217	150
	30	330	260	180
	35	385	303	210
	40	440	347	240


Start-up temperature	CB capacity (A)	240V			
		Maximum heating circuit (ft.) for			
		ELSR-NA-4-2	ELSR-NA-6-2	ELSR-NA-8-2	ELSR-NA-10-2
10 °C (50 °F)	10	273	170	127	66
	15	410	255	191	99
	20	547	340	255	132
	25	683	425	318	165
	30	820	510	382	198
	35	957	595	446	231
0 °C (32 °F)	40	1087	857	509	264
	10	245	154	117	61
	15	367	231	175	91
	20	489	308	233	121
	25	612	385	292	152
	30	734	462	350	182
-10 °C (14 °F)	35	856	539	408	212
	40	979	616	467	243
	10	222	141	108	57
	15	333	211	162	85
	20	444	281	216	113
	25	555	352	270	142
-30 °C (-22 °F)	30	666	422	324	170
	35	777	492	378	198
	40	888	563	432	227
	10	187	120	93	50
	15	280	180	140	75
	20	373	240	187	100
	25	467	300	233	125
	30	560	360	280	150
	35	653	420	327	175
	40	747	480	373	200

Maximum heating circuit ELSR-NA-XX on the following conditions:

- 120/240 Voltage
- Voltage drop max. 10%
- MCB type QO (100% utilization)
- Single cable fed 1 end


ELSR-NA-XX-1-XX output

(on insulated metallic pipes)

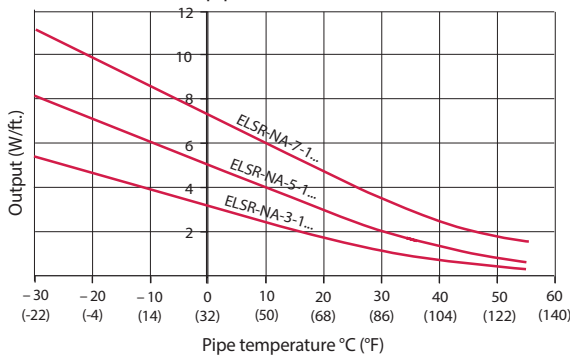

ELSR-NA-XX-2-XX output

(on insulated metallic pipes)

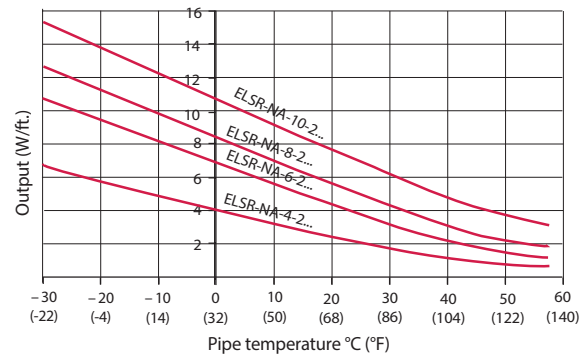

Eltherm® Correction Factors/Multipliers for Operation of Heating Cables in 208V

To calculate the corrected power output for operation in 208V, multiply the published output at 240V (in W/ft.) by the nominal output factor provided for the applicable heating cable type.

To calculate maximum heating circuit lengths for operation in 208V (tables provided in product data sheets), multiply the published max. heating circuit length at 240V provided for the applicable heating cable type.

Heating Cable Correction Factors/ Multipliers	Nominal Output 208V vs. 240V	Heating Circuit Length 208V vs. 240V
ELSR-NA-XX-2	0.88	0.93

Cable heat output depending on the environment


- In Snow and Ice (120V cable)**
 - 11W/ft. @ 50 °F (36W/m @ 10 °C)
- In Dry Air**
 - 7W/ft. @ 50 °F (23W/m @ 10 °C)
- In Snow and Ice (240/208V cable)**
 - 13W/ft. @ 50 °F (42W/m @ 10 °C)
- In Dry Air**
 - 8W/ft. @ 50 °F (26W/m @ 10 °C)

Options

Product # Kit	Description
OSR-NA Series	
ECA-JB1	Junction box for single connection c/w label and fastener
ECA-JB2	Junction box for double connection c/w label and fastener
EL-CLIC-P	Quick connector with supply lead, for 1 to 3 cables
EL-CLIC-S	Quick connector for direct connection or cold lead connection of 1 to 3 cables
EL-ECN-EX ¹	End termination for ELSR-NA
EL-SPN-16	Heat shrink splice-kit suitable for ELSR-NA and cold lead connections
ELAK-3-7	Junction box with mounting stand for non-hazardous (ordinary) and hazardous locations
ELVB-SRAN	Power connection without cable gland
ELVB-SRAN-12-PA	Power connection with plastique/PA12 cable gland/fitting, 1/2" NPT, non-hazardous location
ELVB-SRAN-34-PA	Power connection with plastique/PA12 cable gland/fitting, 3/4" NPT, non-hazardous location
ELVB-SRAN-34-ST	Power connection with steel/zinc cable gland/fitting, 3/4" NPT, non-hazardous location
ELVB-SREX-34-HT ¹	Power connection with nickel plated cable gland, 3/4" NPT, hazardous location
ELVB-SREX-M20-HT ¹	Power connection with nickel plated cable gland, M20, hazardous location
KIT-OSR-DRD-120V	Roof drain de-icing kit with 50' of 120V 7w/ft. OSR-NA cable (ELSR-NA-7-1-BO)
KIT-OSR-DRD-240V	Roof drain de-icing kit with 50' of 240V 8w/ft. OSR-NA cable (ELSR-NA-8-2-BO)
KIT-OSR-ELSR-NA	End and power termination kit with warning sticker NA Series
OSR-MA Series (AO and BO outer jacket)	
EL-ECM ¹	End termination for ELSR-MA
ELVB-SRAM	Power connection without cable gland
ELVB-SRAM-34-ST	Power connection with steel/zinc cable gland/fitting, 3/4" NPT, non-hazardous location
KIT-OSR-ELSR-MA	End and power termination kit with warning sticker MA Series
OSR-MA Series (BF outer jacket)	
EL-ECMF ²	End termination for ELSR-MA-BF
ELVB-SRAM-34-ST	Power connection with steel/zinc cable gland/fitting, 3/4" NPT, non-hazardous location
KIT-OSR-ECA-MABF-PH-FIT	Brass gland cable fitting 3/4" NPT non-hazardous location for MA-BF cable
KIT-OSR-ELSR-MA-BF	End and power termination kit with warning sticker BF Series
KIT-OSR-MABF-PH-1-CTSOD ³	Quick connect plumbing kit for 1" OD polyethylene CTS pipes for MA-BF cable
KIT-OSR-MABF-PH-114-CTSOD ³	Quick connect plumbing kit for 1 1/4" OD polyethylene CTS pipes for MA-BF cable
KIT-OSR-MABF-PH-112-CTSOD ³	Quick connect plumbing kit for 1 1/2" OD polyethylene CTS pipes for MA-BF cable
KIT-OSR-MABF-PH-34-ID ³	Quick connect plumbing kit for 3/4" ID polyethylene pipes for MA-BF cable
KIT-OSR-MABF-PH-1-ID ³	Quick connect plumbing kit for 1" ID polyethylene pipes for MA-BF cable
KIT-OSR-MABF-PH-114-ID ³	Quick connect plumbing kit for 1 1/4" ID polyethylene pipes for MA-BF cable
KIT-OSR-MABF-PH-112-ID ³	Quick connect plumbing kit for 1 1/2" ID polyethylene pipes for MA-BF cable
OSR-WA Series	
EL-CLIC-P	Quick connector with supply lead, for 1 to 3 cables
EL-CLIC-S	Quick connector for direct connection or cold lead connection of 1 to 3 cables
EL-ECW ¹	End termination for ELSR-WA
ELVB-SRAW	Power connection without cable gland
ELVB-SRAW-34-ST	Power connection with steel/zinc cable gland, 3/4" NPT, non-hazardous location
KIT-OSR-ELSR-WA	End and power termination kit with warning sticker WA Series
OSR-HA Series	
ECA-JB1	Junction box for single connection c/w label and fastener
ECA-JB2	Junction box for double connection c/w label and fastener
EL-ECH-EX ¹	End termination for ELSR-HA
ELAK-3-7	Junction box with mounting stand for non-hazardous (ordinary) and hazardous locations
ELVB-SRAH	Power connection without cable gland
ELVB-SRAH-34-ST	Power connection with steel/zinc cable gland/fitting, 3/4" NPT, non-hazardous location
ELVB-SREX-34-HT ¹	Power connection with nickel plated cable gland, 3/4" NPT, hazardous location
ELVB-SREX-M20-HT ¹	Power connection with nickel plated cable gland, M20, hazardous location
KIT-OSR-ELSR-HA	End and power termination kit with warning sticker HA Series



EL-EC(x)

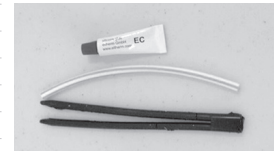

ELVB-SRA(x)



ELVB-SRA(x)-34-ST




KIT-OSR-ELSR-xxx



KIT-OSR-MABF-PH-xxx-CTSOD



KIT-OSR-MABF-PH-xxx-ID

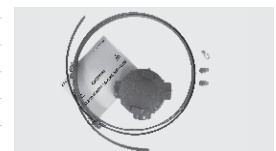

ECA-JB1

¹ Minimum installation temperature -45 °C (-49 °F).

² Minimum installation temperature -13 °C (-25 °F).

³ Identifying the type of pipe is key to ensuring a simple and effective connection, Ouellet Canada is not responsible for incorrect pipe selection. No returns will be accepted.

Options

Product # Kit	Description
All OSR Series	
Multiple applications	
KIT-OSR-EL-WS03	Warning label/sign bilingual (English / French)
Roof and gutter	
ELB-20	Stainless steel downspout 90° mounting plate with nylon ties
ELB-21	Stainless steel gutter mounting plate with nylon ties
ELB-RCLIP	Roof clips for cable, qty 25
Pipe tracing	
ELB-02B	Self-adhesive glass fiber tape, max. temp. = 90 °C (194 °F), 165 ft. (50 m)
ELB-06C	Self-adhesive aluminum tape, max. temp. = 80 °C (176 °F), 165 ft. (50 m)

Controls

Product #	Description
Controller options for roof and gutter for de-icing	
DS-2C ¹	Aerial mounted controller with sensor to detect humidity and temperature, 30A: 100V to 277V, 20A: 28VDC
DS-8C ¹	Aerial mounted controller with sensor to detect temperature and a sensor to detect humidity with 10 ft. (3 m) cable, 30A, 100V to 277V
DS-9C ¹	Aerial mounted controller with sensor to detect temperature and a sensor to detect humidity with 10 ft. (3 m) cable, 2 x 30A, 100V to 277V
EX-50	50 ft. (15 m) extension kit, with connection fittings for humidity sensor
CDP-2	Interior controller and display for DS products
ETO2 ¹	Dual-zone electronic controller, 1-zone: 3 x 16A, 2-zone: 2 x 16A, 120V to 240V
ETF-744-99	24V outdoor sensor for measuring temperature
ETOR-55	Gutter sensor to detect humidity with 33 ft. (10 m) cable
Controller options for pipe tracing for use in non-hazardous (ordinary) locations	
ECA-E55-R25HT ¹	SPDT, NEMA 4X thermostat in molded aluminum housing, 22A at 120/250/480V, with 10 ft. (3 m) stainless steel bulb and capillary
TPR-L1N-3X-Q10 ¹	SPDT, NEMA 4X thermostat in polycarbonate housing, 22A at 120/250/480V, with 3 ft. (1 m) tinned copper bulb and capillary
TPR-L1N-10X-Q10 ¹	SPDT, NEMA 4X thermostat in polycarbonate housing, 22A at 120/250/480V, with 10 ft. (3 m) tinned copper bulb and capillary
TRF115-005 ¹	SPDT, NEMA 4X thermostat, range -17 °C to 49 °C (0 °F to 120 °F), 25A at 120/208/240/277V, with 5 ft. (1.5 m) stainless steel bulb and capillary
TRF115-007 ¹	SPDT, NEMA 4X thermostat, range -35 °C to 38 °C (-30 °F to 100 °F), 25A at 120/208/240/277V, with 8 ft. (2.4 m) copper bulb and capillary
ELTC-14-RTD ¹	Digital temperature control 20A at 90-260V, including 3-wire RTD (Pt-100) sensing element is 5 x 50 mm with 5 m of fluoropolymer lead wires, range 0 °C to 250 °C (32 °F to 482 °F). Suitable for used with GFPE panels
GPT-130	NEMA 4X IP66 electronic single point line sensing heat trace controller 100-277V, 30A c/w built-in 30 mA GFEP and 20 ft. (6 m) lead, 100k ohms at 25 °C(77 °F) thermistor. Range -40 °C to 110 °C (-40 °F to 230 °F)
S1-A	NEMA 4X IP67 electronic single point line sensing heat trace controller 100-277V, 30A c/w built-in 30 mA GFEP and 20' (6 m) lead, 10k ohms thermistor, Wi-Fi, Ethernet, Modbus and BACnet ³ capabilities
S1-B	NEMA 4X IP67 electronic single point line sensing heat trace controller 100-277V, 30A c/w built-in 30 mA GFEP and 20' (6 m) lead, 10k ohms thermistor, Wi-Fi, Ethernet
GATEWAY-PCKG	24VDC BACnet gateway assembly with power supply NEMA 4X enclosure with 24VDC transformer for S1 Series
GATEWAY	24VDC BACnet gateway stand alone for S1 Series
Controller options for pipe tracing for use in non-hazardous (ordinary) and hazardous locations	
TXR-L25-10-Q10 ¹	SPDT, explosion-proof, NEMA 4, 7 and 9 thermostat, in anodized aluminum housing, 22A at 120/250/480V, with 10 ft. (3 m) stainless steel bulb and capillary
TM-1SIH1-E5-RTD-A1	TraceMate™ I GFCI electronic thermostat for single circuit at 120V, 30A
TM-1DIH2-E5-RTD-A1	TraceMate™ I GFCI electronic thermostat for single circuit at 240/208V, 30A
TM-2SIH1-E5-RTD	TraceMate™ II GFCI electronic thermostat for dual circuit at 120V, 2 x 30A
TM-2DIH2-E5-RTD	TraceMate™ II GFCI electronic thermostat for dual circuit at 240/208V, 2 x 30A
MS-2101 ²	MasterTrace Single circuit electronic GFCI controller with double pole, 85V to 300V, 30A, with user interface
MS-2102 ²	MasterTrace Double circuit electronic GFCI controller with single pole, 120V or 277V, 2 x 30A, with user interface
RTD-7	RTD probe for MasterTrace controller
Control panel options	
SR-4CIR-240	4 circuits 240V 30A circuit GFEP control panel with contactors and 240-120V control transformer (HxWxD: 20x16x8 in.)
SR-6CIR-240	6 circuits 240V 30A circuit GFEP control panel with contactors and 240-120V control transformer (HxWxD: 20x16x8 in.)
SR-8CIR-240	8 circuits 240V 30A circuit GFEP control panel with contactors and 240-120V control transformer (HxWxD: 24x20x8 in.)
SR-12CIR-240	12 circuits 240V 30A circuit GFEP control panel with contactors and 240-120V control transformer (HxWxD: 24x24x8 in.)

¹ Requires a ground fault circuit interrupter (GFCI) in the electrical panel.

² Requires a RTD probe for MasterTrace controller (RTD-7).

³ BACnet IP or MS/TP available via preconfigured SMC gateway, sold separately.

