SHDXL | XLERATOR™

HAND DRYER





XLERATOR

THE STANDARD IN HIGH VELOCITY

The first high velocity hand dryer on the market, the XLERATOR sets the standard for quality and performance in its category. The XLERATOR dries hands in seconds, making it the ultimate choice in washrooms with high traffic, such as stadiums, arenas and public places. Its reinforced, die-cast zinc alloy shell make it virtually unbreakable. The first choice for LEED® buildings, the XLERATOR is the ideal high velocity hand dryer!

DRIES HANDS IN ONLY 8 SECONDS†!

LED WARNING LIGHT IN CASE OF PROBLEMS

PERFECT FOR LEED® BUILDINGS

CHOICE OF 5 COLOURS AND CUSTOMIZATION WITH YOUR LOGO

COLOURS

- standard: white, white polymer RMC
- luxurious finish: chrome, graphite or brushed stainless steel (surcharge)

FINISH

• epoxy-polyester powdercoat

MANUFACTURING

- rib reinforced shell, solidly constructed of die-cast zinc alloy
- lightweight, unbreakable and rustproof
- secured to its supporting wall bracket with two chrome-plated, tamper-proof bolts

SOUND LEVEL

• 71 dBA (81 dBA with hands)

ELEMENT

 nichrome element producing instant heat

CONTROL

- infrared optical sensor located next to the air outlet activates hand dryer
- 35-second lockout feature is activated if hands are not removed before this time

INSTALLATION

wall mounted

WARRANTY

- five years, *three years on electronic components
- † Dry time and energy use testing performed by SGS International on standard XLERATOR Hand Dryer with 0.8 in. nozzle to 0.25 g or less of residual moisture, pursuant to the UL Environment Global Product Category Rules (PCR) for Hand Dryers.

TECHNICAL SPECIFICATIONS											
PRODUCT	PC	OWER (WATT	S)	VOLTAGE	AMPERAGE	WEI	GHT	PRICE			
CODE	ELEMENT	MOTOR	TOTAL	VOLTS	AMPERES	KG	LB	W	BW	GR	CH OR SS
SHDXLAS1	1000	500	1500	120	12.5	7.3	16	933.00	851.00	986.00	1069.00
CHUALVES	1000	500	1500	200 240 277	6.5	72	16	022.00	0E1 00	006.00	1060.00

 ${\sf Add\ W\ for\ white}, {\sf BW\ for\ white} \ {\sf polymer\ BMC}, {\sf CH\ for\ chrome}, {\sf SS\ for\ brushed\ stainless\ steel\ or\ {\sf GR\ for\ graphite}.$





	ENERGY SAVINGS	AIR SPEED OR AIR FLOW	HEATING POWER	NOISE LEVEL	DRYING TIME
		ADJUSTABLE	<u></u>	■● (1)	*
			<u> </u>		
ADJUSTABLE PARAMETERS: HEAT, MOTOR AND RANGE Ideal for: schools, arenas, stadiums and busy public places			<u>{</u>		

^{*}At maximum capacity

RECOMMENDED INSTALLATION HEIGHTS Distance between floor and bottom of hand dryer							
MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED			
45 in. (115 cm)	43 in. (110 cm)	41 in. (105 cm)	35 in. (90 cm)	37 in. (95 cm)			






ACCESSORIES


RECESS KIT

The recess kit is comprised of a stainless steel, satin finish wall box and mounting plate. When installed with the recess kit, the XLERATOR takes up less than 4 in. (10 cm) of wall depth, meeting ADA Protrusion Requirements (Americans with Disabilities Act).

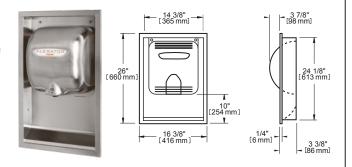

HEPA FILTRATION SYSTEM

°STELPRO offers the only certified HEPA filtration system proven to remove 99.97% of bacteria and particles from the air.



WALL GUARD

STAINLESS STEEL

The wall guard protects the wall under the hand dryer from drops of water due to wet hands being blown dry, keeping bacteria from forming on the wall.



PRODUCT	DESCRIPTION	PRICE
SHDXL-40525	HEPA filter kit	332.00
SHDXL-40520	HEPA replacement filter	177.00
SHDXL-94	Replacement pre-filter with stainless steel mesh screen	56.00
SHDXL-40502	Stainless steel recess kit	353.00
SHDXL-89W	Wall guard - white (15 3/4 in. x 31 3/4 in. x 1/16 in 40 cm x 81 cm x 0.16 cm) - set of two	277.00
SHDXL-89B	Wall guard - black (15 3/4 in. x 31 3/4 in. x 1/16 in 40 cm x 81 cm x 0.16 cm) - set of two	277.00
SHDXL-89S	Wall guard - stainless steel (15 3/4 in. x 31 3/4 in. x 1/16 in. – 40 cm x 81 cm x 0.16 cm) – set of two	442.00

TECHNICAL DRAWINGS

