

# WF

## WALL FAN HEATER



### VERSATILITY IS THE NAME OF THE GAME!

The WF is a high-capacity fan heater that's ideal for building lobbies, long corridors, stairwells, workshops, factories and warehouses. Its electrical element is made of high-quality nichrome that provides an immediate surge of hot air. The various modes of wall installation make the WF heater one of the most versatile fan heaters on the market: it can be surface mounted or recessed, with a variety of models and heating capacities to choose from.

#### GRILLE WITH ROUNDED SIDES

DURABLE AND STYLISH

#### WIDE RANGE OF MODELS AND HEATING CAPACITIES

INCLUDING A SINGLE 4800 W MODEL

#### NICHROME ELEMENT

ASSURING INSTANT HEAT

#### OPTIONAL DISCONNECT SWITCH AVAILABLE



ROUNDED SIDES

#### IDEAL FOR:

lobby, corridor, factory, warehouse, stairwell

#### COLOURS

- **standard:** white, soft white
- **luxury finish:** stainless steel (see price list)
- **ORORA (optional):** refer to [www.stelpro.com/en-CA/orora](http://www.stelpro.com/en-CA/orora)

#### FINISH

- epoxy-polyester powdercoat or stainless steel

#### MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- top air intake with bottom air discharge
- quiet helicoidal fan: single unit 1 x 160 CFM – double unit 2 x 160 CFM – triple unit 3 x 160 CFM
- thermal protection with automatic reset
- totally enclosed, permanently lubricated motor

#### ELEMENT

- high-quality nichrome element producing instant heat

#### CONTROL

- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

#### INSTALLATION

- wall mounted
- recessed or surface mounted with surface adapter (optional)

#### WARRANTY

- three years

# °STELPRO

°STELPRO reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at [www.stelpro.com](http://www.stelpro.com).



FC\_WF\_EN\_311018

# TECHNICAL SPECIFICATIONS

WITHOUT CONTROL			BUILT-IN THERMOSTAT			240 V CONTROL	24 V CONTROL			POWER	VOLTAGE	WEIGHT	MODEL	
CODE	PRICE W OR SW	PRICE SS	CODE	PRICE W OR SW	PRICE SS	CODE	CODE	PRICE W OR SW	PRICE SS	WATTS	VOLTS	KG	LB	UNIT
WF1508	512.00	631.00	WF1508T	559.00	678.00	WF1508C	WF1508C24	659.00	779.00	1500	208	9	20	SINGLE
WF1502	512.00	631.00	WF1502T	559.00	678.00	WF1502C	WF1502C24	659.00	779.00	1500/1125	240/208	9	20	SINGLE
WF1503	746.00	865.00	WF1503T	794.00	913.00	WF1503C	WF1503C24	893.00	1013.00	1500	347	9	20	SINGLE
---	---	---	WF1506T	833.00	953.00	WF1506C	WF1506C24	934.00	1054.00	1500	600	10	22	SINGLE
WF2008	512.00	631.00	WF2008T	559.00	678.00	WF2008C	WF2008C24	659.00	779.00	2000	208	9	20	SINGLE
WF2002	512.00	631.00	WF2002T	559.00	678.00	WF2002C	WF2002C24	659.00	779.00	2000/1500	240/208	9	20	SINGLE
WF2003	746.00	865.00	WF2003T	794.00	913.00	WF2003C	WF2003C24	893.00	1013.00	2000	347	9	20	SINGLE
---	---	---	WF2006T	833.00	953.00	WF2006C	WF2006C24	934.00	1054.00	2000	600	10	22	SINGLE
WF3008	525.00	645.00	WF3008T	571.00	691.00	WF3008C	WF3008C24	673.00	793.00	3000	208	9	20	SINGLE
WF3002	525.00	645.00	WF3002T	571.00	691.00	WF3002C	WF3002C24	673.00	793.00	3000/2250	240/208	9	20	SINGLE
WF3003	760.00	880.00	WF3003T	808.00	927.00	WF3003C	WF3003C24	908.00	1027.00	3000	347	9	20	SINGLE
---	---	---	WF3006T	847.00	967.00	WF3006C	WF3006C24	948.00	1067.00	3000	600	10	22	SINGLE
WF4008	566.00	686.00	WF4008T	612.00	732.00	WF4008C	WF4008C24	713.00	832.00	4000	208	9	20	SINGLE
WF4002	566.00	686.00	WF4002T	612.00	732.00	WF4002C	WF4002C24	713.00	832.00	4000/3000	240/208	9	20	SINGLE
WF4003	800.00	919.00	WF4003T	847.00	967.00	WF4003C	WF4003C24	948.00	1067.00	4000	347	9	20	SINGLE
---	---	---	WF4006T	888.00	1007.00	WF4006C	WF4006C24	989.00	1107.00	4000	600	10	22	SINGLE
WF4808	592.00	712.00	WF4808T	643.00	762.00	WF4808C	WF4808C24	748.00	868.00	4800	208	9	20	SINGLE
WF4802	592.00	712.00	WF4802T	643.00	762.00	WF4802C	WF4802C24	748.00	868.00	4800/3600	240/208	9	20	SINGLE
WF4803	840.00	959.00	WF4803T	889.00	1008.00	WF4803C	WF4803C24	995.00	1114.00	4800	347	9	20	SINGLE
---	---	---	WF4806T	932.00	1051.00	WF4806C	WF4806C24	1038.00	1157.00	4800	600	10	22	SINGLE
---	---	---	WF6008CT	1459.00	1687.00	WF6008C	WF6008C24	1411.00	1640.00	6000	208	18	40	DOUBLE
---	---	---	WF6002T	1310.00	1539.00	WF6002C	WF6002C24	1411.00	1640.00	6000/4500	240/208	18	40	DOUBLE
---	---	---	WF6003T	1713.00	1941.00	WF6003C	WF6003C24	1814.00	2041.00	6000	347	18	40	DOUBLE
---	---	---	WF6006T	1713.00	1941.00	WF6006C	WF6006C24	1814.00	2041.00	6000	600	20	44	DOUBLE
---	---	---	WF60083CT*	1459.00	1746.00	WF60083C*	WF60083C24*	1411.00	1699.00	6000	208	36	80	TRIPLE
---	---	---	WF60063CT*	1860.00	2148.00	WF60063C*	WF60063C24*	1814.00	2101.00	6000	600	36	80	TRIPLE
---	---	---	WF8008CT	1551.00	1780.00	WF8008C	WF8008C24	1504.00	1733.00	8000	208	18	40	DOUBLE
---	---	---	WF8002CT	1551.00	1780.00	WF8002C	WF8002C24	1504.00	1733.00	8000/6000	240/208	18	40	DOUBLE
---	---	---	WF8003CT	2108.00	2337.00	WF8003C	WF8003C24	2063.00	2291.00	8000	347	18	40	DOUBLE
---	---	---	WF8006CT	2108.00	2337.00	WF8006C	WF8006C24	2063.00	2291.00	8000	600	20	44	DOUBLE
---	---	---	WF90083CT*	2118.00	2405.00	WF90083C*	WF90083C24*	2069.00	2358.00	9000	208	36	80	TRIPLE
---	---	---	WF90063CT*	2769.00	3057.00	WF90063C*	WF90063C24*	2720.00	3009.00	9000	600	36	80	TRIPLE
---	---	---	WF12008CT	2318.00	2606.00	WF12008C	WF12008C24	2272.00	2559.00	12 000	208	36	80	TRIPLE
---	---	---	WF12002CT	2318.00	2606.00	WF12002C	WF12002C24	2272.00	2559.00	12 000/9000	240/208	36	80	TRIPLE
---	---	---	WF12003CT	2970.00	3257.00	WF12003C	WF12003C24	2923.00	3211.00	12 000	347	36	80	TRIPLE
---	---	---	WF12006CT	2970.00	3257.00	WF12006C	WF12006C24	2923.00	3211.00	12 000	600	36	80	TRIPLE
---	---	---	WF120083CT*	2318.00	2606.00	WF120083C*	WF120083C24*	2272.00	2559.00	12 000	208	36	80	TRIPLE
---	---	---	WF120063CT*	2970.00	3257.00	WF120063C*	WF120063C24*	2923.00	3211.00	12 000	600	36	80	TRIPLE

Add W for white, SW for soft white or SS for stainless steel (consult the optional colours chart or contact your °STELPRO representative for all other colours).

\* Three-phase unit

Models also available in 277 V and 480 V.

--- not available



## THROW DISTANCE AND HEAT RISE

UNITS	THROW DISTANCE		HEAT RISE	
KW	M	FT.	°C	°F
1.5	4.1	13'7"	30	53
2	4.1	13'7"	42	75
3	4.1	13'7"	61	110
4	4.1	13'7"	74	133
4.8	4.1	13'7"	93	167
6	4.1	13'7"	61	110
8	4.1	13'7"	74	133
9	4.1	13'7"	61	110
12	4.1	13'7"	74	133

## ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
WFT1	built-in single pole thermostat [120 V-600 V]	48.00
WFT2	built-in double pole thermostat [120 V-600 V]	61.00
WFS1*	surface adapter (single unit)	63.00
WFS2*	surface adapter (double unit)	129.00
WFS3*	surface adapter (triple unit)	193.00
WFS1SS	stainless steel surface adapter (single unit)	156.00
WFS2SS	stainless steel surface adapter (double unit)	268.00
WFS3SS	stainless steel surface adapter (triple unit)	377.00
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles	125.00
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles	148.00
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles	179.00
WFC24RX*	relay kit without transformer 24 V	109.00


\* Add W for white or SW for soft white.

\* Factory installation


STELPRO reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at [www.stelpro.com](http://www.stelpro.com).

# TECHNICAL DRAWINGS

## SINGLE UNIT

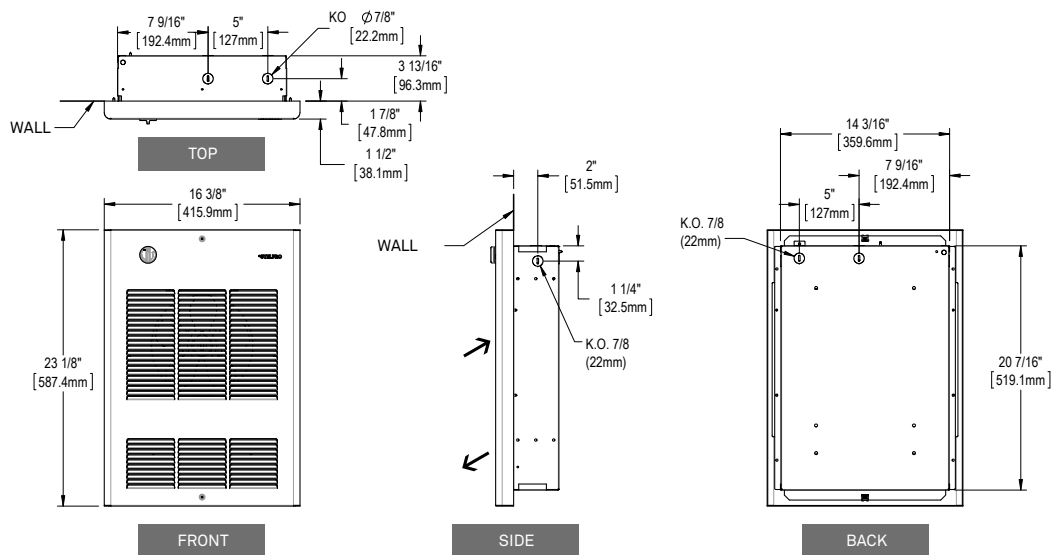

## DOUBLE UNIT

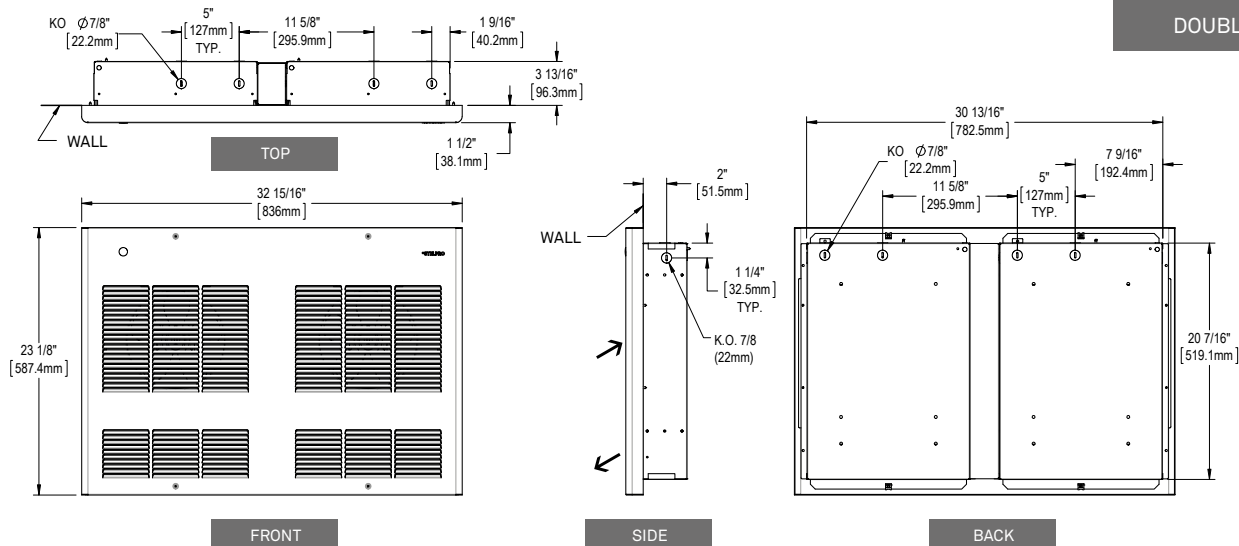

## TRIPLE UNIT

