




SHOP DRAWING

HEATING CABLE ON LATTICE FOR CONCRETE SECM SERIES

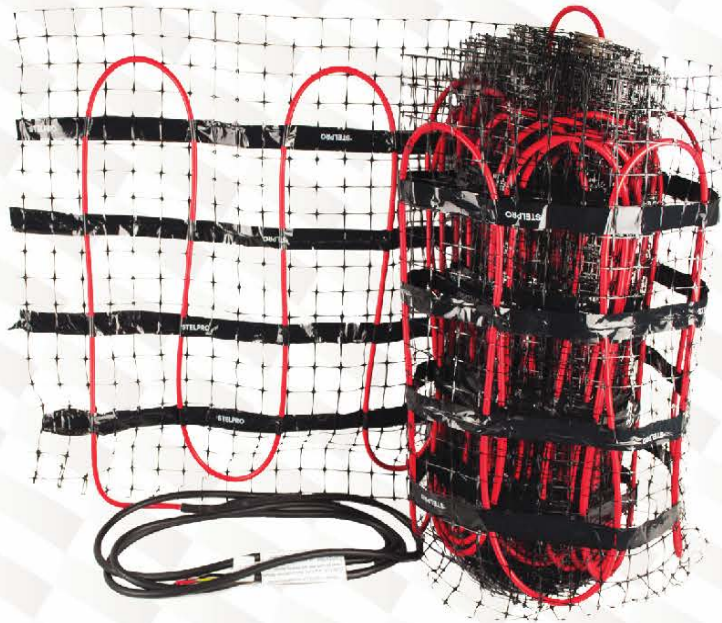

FEATURES

MANUFACTURING

- double conductor heating cable fastened to a plastic lattice with negligible magnetic emissions
- 24 in. wide (0.6 m) lattice available in several lengths
- 9 ft cold lead included

WATTAGE

- 12 W/sq. ft. (129 W/m²) factory installed on a lattice – 5.5 in. (14 cm) spacing
- 240/208 V

CONTROL

- electronic thermostat for heated floor (optional: floor sensor included with thermostat)

Note: This product must be used with a ground fault circuit interrupter (GFCI) unless this is not required by the national or local code in the region where it is being installed.

INSTALLATION

- never cut the cable
- for indoor residential and commercial applications only
- can be installed under a 4 to 6 in. (10 to 15 cm) concrete slab or under a 1.5 to 4 in. (4 to 10 cm) concrete floor covering
- compatible with most floor coverings*
- can be installed with or without a metal frame for reinforced concrete
- supplied materials: plastic floor staples, 15 ft (4.5 m) floor sensor, warranty card and sticker to be placed on the electrical panel

