


APPLICATION

Octagon boxes can be used in the installation of ceiling or wall lighting fixtures. Extension rings provide a means for adding additional cubic capacity.

PRODUCT FEATURES

- Combination screw heads provide for faster installation
- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction

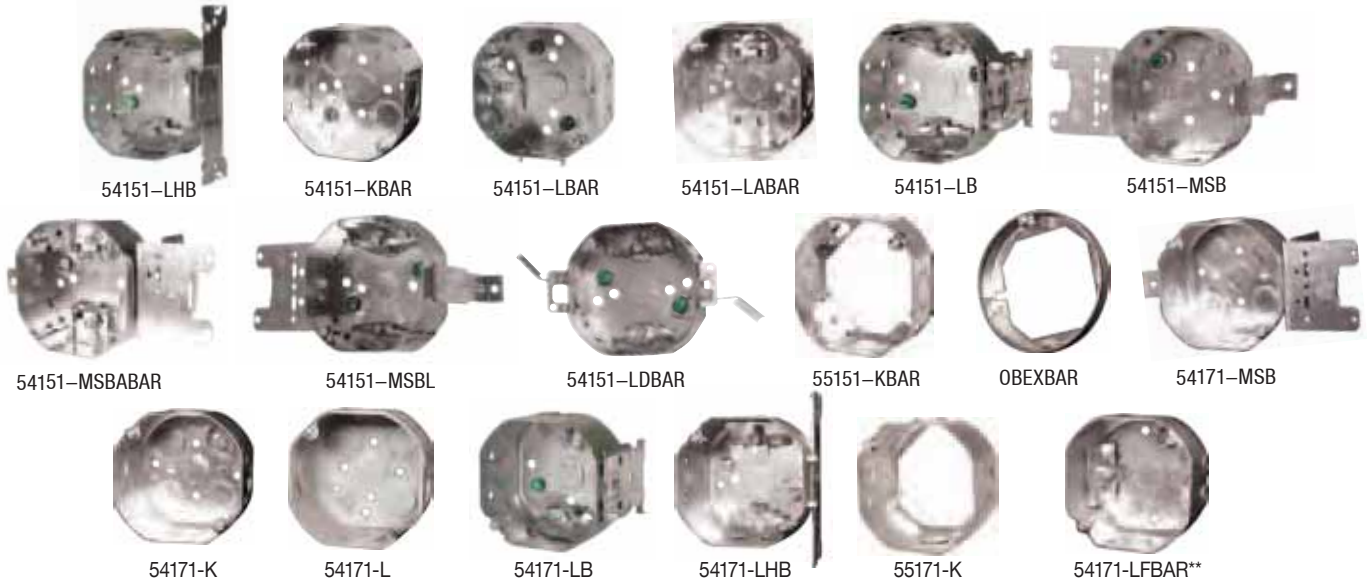

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS	CABLE CLAMPS
4" Octagon Box - 1-1/2" Deep					
54151-LHB	15.0	SB	no	1/2"(2)	L
54151-KBAR	15.0	-	yes	K(6), 1/2"(2)	-
54151-LBAR	15.0	-	no	1/2"(3)	L
54151-LABAR	15.0	-	no	1/2"(3)	A
54151-LB	15.0	B	no	1/2"(2)	L
54151-MSB	15.0	MSB	yes	K(4), 1/2"(2)	-
54151-MSBABAR	15.0	MSB	no	1/2"(1)	A
54151-MSBL	15.0	MSB	no	1/2"(1)	L
54151-LDBAR	15.0	Rework	no	-	-
55151-KBAR	15.0	Ext. Ring	-	K(4)	-
OBEXBAR	5.0	Ext. Ring	-	-	-
4" Octagon Box - 2-1/8" Deep					
54171-MSB	21.0	MSB	yes	K(4), 1/2"(4)	-
54171-MSB-1*	21.0	MSB	yes	K(4), 1/2"(4)	-
54171-K	21.0	-	yes	K(4), 1/2"(4)	-
54171-L	21.0	-	no	1/2"(3)	L
54171-LB	21.0	B	no	1/2"(2)	L
54171-LHB	21.0	SB	no	1/2"(2)	L
55171-K	21.0	Ext. Ring 21.0	-	K(2), 1/2"(2)	-
4" Ceiling Fan - 2-1/8" Deep - Max Load Capacity: 35 lb (15.6 kg)					
54171-LFBAR**	21.0	-	no	1/2"(3)	L

* Brackets set back for two layers of 1/2" drywall

** supplied with two No. 10-32 machine screws and washers