



SUPPORT FOR STAND-ALONE INST. FOR  
 3RU21/3RB30/3RB31/3RR2 SIZE S0, STAND-ALONE  
 INSTALLATION MAIN CIRCUIT: SCREW TERMINAL  
 AUXILIARY CIRCUIT: --

**General technical data:**

<b>product brand name</b>		SIRIUS
<b>Product designation</b>		individual mount
<b>Size of overload relay</b>		S0
<b>Ambient temperature</b>		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70

**Installation/ mounting/ dimensions:**

<b>Mounting type</b>		screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	mm	45
<b>Height</b>	mm	95
<b>Depth</b>	mm	86

**Connections/ Terminals:**

<b>Type of connectable conductor cross-section</b>		
• for main contacts		
— finely stranded		1 ... 6 mm <sup>2</sup>
— with core end processing		
• for AWG conductors		
— for main contacts		1x (16 ... 8)

**Certificates/ approvals:**

General Product Approval				Declaration of Conformity	Test Certificates
 CCC	 CSA		 UL	 EG-Konf.	<a href="#">Special Test Certificate</a>

Test Certificates	Shipping Approval				
<a href="#">Type Test Certificates/Test Report</a>	 ABS	 BUREAU VERITAS	 DNV	 GL	 LRS

Shipping Approval	other
 RINA	<a href="#">Environmental Confirmations</a>

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU29263AA01>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU29263AA01>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RU29263AA01&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU29263AA01&lang=en)

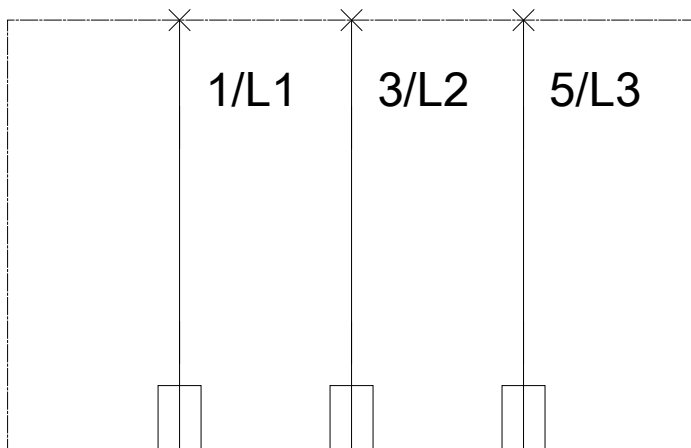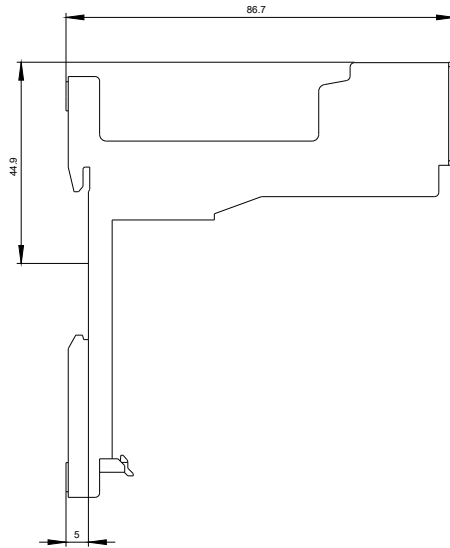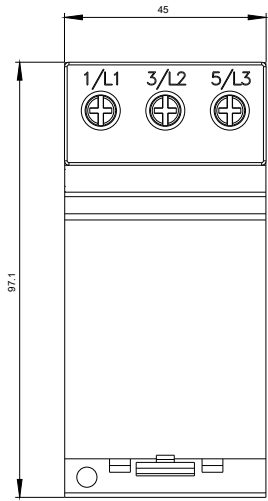

last modified:

23.06.2015