

# Photocontrol - NIGHTFOX Stem and Swivel Mount Electronic Photocontrol, 347 V

## Item EK4227S



**PRODUCT DESCRIPTION** 

NIGHTFOX electronic photocontrols permanently install on outdoor electrical boxes or outdoor lighting fixtures. Ideal for LED fixtures with long-life expectations. ½"-14 NPSM threaded stem fits standard outlet boxes and wall packs with a minimum installation hole size of 7/8" diameter. Come with 9" wire leads.

#### **FEATURES**

- ► Non-drift silicon light sensor with IR filter
- ► DC relay with zero-crossing circuitry for extended life
- Conformal coated PCB
- ► 15-year design life
- ► Exceeds 10,000 ON/OFF switching cycles
- ► Fail ON mode
- ► Ideal for single or multifixture HID and LED installations
- ► 220 J MOV surge protection element
- 1/2"-14 NPSM threaded stem fits standard outlet boxes and wall packs for a minimum installation hole size of 7/8 inch diameter
- ► #18 AWG wire leads

# **APPLICATIONS**

Outdoor Lighting Control

# **TECHNICAL DATA**

ւայ


General	
Model Number	EK4227S
Description	NIGHTFOX Stem and Swivel Mount Electronic Photocontrol, 347 V
UPC Code	078275152380
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	8-Year limited
Control Specifications	
Sensor Time Delay	Instant ON; 2 sec to 5 sec OFF
Photocell Type	Silicon Diode
Photo Control Switch Type	Relay
Fail Mode	ON
Activation On	1.5 fc
Activation Off	4.5 fc
Photocontrol Type	Electronic
Application Compatibilities	LED; Incandescent; HID
Photocontrol Style	Stem and Swivel Mount
Photocontrol Sensor Location	Side
Dimensions	
Product Height (in)	5 5/8
Product Height (mm)	142.9
Product Width (in)	1 5/16



33.3
1 1/4
31.8
6
152
#18 AWG
Gray
Polycarbonate
1000 W
1800 VA
2 A
Wire leads
347 VAC, 50/60 Hz
220 J MOV, 5,000 A Surge
4.875 x 3 x 1.75 in
15
10000
-40°C70°C
Outdoor
cULus
Ansi C136.24
Nickel; DEHP
No



#### DRAWINGS AND DIAGRAMS

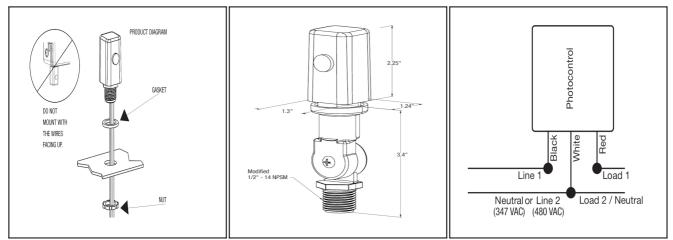



### ACCESSORIES



22LG0120 Light Guard Accessory for EK4000 Series Electronic Fix Mount Photocontrols



LGLBL Lens Sticker Accessory for EK4000 & K4000 Series Photocontrols