## **SIEMENS**

Data sheet 3RT2015-1BB41



power contactor, AC-3e/AC-3, 7 A, 3 kW / 400 V, 3-pole, 24 V DC, auxiliary contacts: 1 NO, screw terminal, size: S00  $\,$ 

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	0.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	0.2 W
without load current share typical	4 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	6,7g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at DC	10,5g / 5 ms, 6,6g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	30 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Environmental footprint	

Environmental Product Declaration(EPD)	Yes
Global Warming Potential [CO2 eq] total	153 kg
Global Warming Potential [CO2 eq] total  Global Warming Potential [CO2 eq] during manufacturing	1.42 kg
Global Warming Potential [CO2 eq] during manufacturing  Global Warming Potential [CO2 eq] during operation	152 kg
Global Warming Potential [CO2 eq] after end of life	-0.305 kg
Main circuit	-0.000 kg
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	. •
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>	18 A
• at AC-1	
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	18 A
— up to 690 V at ambient temperature 60 °C rated value	16 A
• at AC-3	7.4
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
<ul><li>at AC-3e</li><li>— at 400 V rated value</li></ul>	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
at AC-4 at 400 V rated value	6.5 A
• at AC-5a up to 690 V rated value	15.8 A
at AC-5b up to 400 V rated value	5.8 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	4 A
— up to 400 V for current peak value n=20 rated value	4 A
— up to 500 V for current peak value n=20 rated value	3.8 A
— up to 690 V for current peak value n=20 rated value	3.6 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	2.7 A
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	2.7 A
— up to 500 V for current peak value n=30 rated value	2.5 A
— up to 690 V for current peak value n=30 rated value	2.4 A
minimum cross-section in main circuit at maximum AC-1 rated value	2.5 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	2.6 A
at 690 V rated value	1.8 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	15 A
— at 60 V rated value	15 A
— at 110 V rated value	1.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.42 A
with 2 current paths in series at DC-1  at 24 V rated value	15 Δ
at 24 V rated value      at 60 V rated value	15 A 15 A
— at 110 V rated value  — at 110 V rated value	8.4 A
— at 220 V rated value	1.2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.5 A
with 3 current paths in series at DC-1	
- min o ourront patrio in series at DO-1	

at 24 V rated value   19 A   15 A				
	— at 24 V rated value	15 A		
	— at 60 V rated value	15 A		
	— at 110 V rated value	15 A		
- at 15 CV rated value	— at 220 V rated value	15 A		
- at 1 current paths at DC-3 at DC-5	— at 440 V rated value	0.9 A		
	— at 600 V rated value	0.7 A		
	• at 1 current path at DC-3 at DC-5			
- with 2 current paths in series at DC-3 at DC-5	— at 24 V rated value	15 A		
	— at 60 V rated value	0.35 A		
	<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>			
at 110 V rated value  with 3 current paths in series at DC-3 at DC-5  at 24 V rated value  at 100 V rated value  at 100 V rated value  at 100 V rated value  at 220 V rated value  at 220 V rated value  at 230 V rated value  at 440 V rated value  at 460 V rated value  at 1600 V rated value  at 230 V rated value  at 430 V rated value  at 690 V roted va	— at 24 V rated value	15 A		
at 110 V rated value  with 3 current paths in series at DC-3 at DC-5  at 24 V rated value  at 100 V rated value  at 100 V rated value  at 100 V rated value  at 220 V rated value  at 220 V rated value  at 230 V rated value  at 440 V rated value  at 460 V rated value  at 1600 V rated value  at 230 V rated value  at 430 V rated value  at 690 V roted va				
- with 3 current paths in series at DC-3 at DC-5 - at 24 V rated value - at 160 V rated value - at 110 V rated value - at 220 V rated value - at 440 V rated value - at 440 V rated value - at 440 V rated value - at 600 V for current pack value n-20 rated value - at 600 V for current pack value n-20 rated value - up to 600 V for current pack value n-30 rated value - up to 600 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V for current pack value n-30 rated value - up to 500 V				
		0.2071		
	•	15 A		
Departing power				
at AC-3				
	— at 600 V rated value	0.14 A		
	operating power			
at 400 V rated value	• at AC-3			
- at 500 V rated value - at 690 V rated value - at 690 V rated value - at 690 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value	— at 230 V rated value	1.5 kW		
	— at 400 V rated value	3 kW		
at AC-3e  at 230 V rated value  at 500 V rated value  at 690 V rated value  at 690 V rated value  at 400 V rated value  at 690 V rated value  at 690 V rated value  at 690 V rated value  1.15 kW  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value  up to 400 V for current peak value n=20 rated value  up to 690 V for current peak value n=20 rated value  up to 690 V for current peak value n=20 rated value  up to 690 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  2.9 kVA  short-lime withstand current in cold operating state up to  40 °C  ilmited to 1 s switching at zero current maximum  ilmited to 5 s switching at zero current maximum  ilmited to 50 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 switching frequency  ilmited to 60 switching freque	— at 500 V rated value	3 kW		
- at 230 V rated value	— at 690 V rated value	4 kW		
- at 400 V rated value - at 500 V rated value - at 690 V rated value - at 690 V rated value  operating power for approx. 200000 operating cycles at AC-4  * at 400 V rated value * at 690 V rated value * at 690 V rated value * at 690 V rated value * up to 230 V for current peak value n=20 rated value * up to 200 V for current peak value n=20 rated value * up to 500 V for current peak value n=20 rated value * up to 500 V for current peak value n=20 rated value * up to 500 V for current peak value n=20 rated value * up to 500 V for current peak value n=30 rated value * up to 500 V for	• at AC-3e			
- at 500 V rated value	— at 230 V rated value	1.5 kW		
- at 500 V rated value	— at 400 V rated value			
- at 690 V rated value  operating power for approx. 200000 operating cycles at AC-4  * at 400 V rated value  at 690 V rated value  1.15 kW  operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=30 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3		3 kW		
operating power for approx. 200000 operating cycles at AC-4  at 400 V rated value at 690 V rated value but to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 2.2 kVA 2.9 kVA  short-time withstand current in cold operating state up to 40 °C  ilimited to 1 s switching at zero current maximum ilimited to 5 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum at DC  operating frequency at AC-1 maximum at AC-2 maximum  at AC-3 maximum  at AC-3 maximum  750 1/h at AC-3 maximum  750 1/h at AC-4 maximum  750 1/h at AC-4 maximum  750 1/h				
at 400 V rated value at 690 V rated value 1.15 kW  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 2.2 kVA up to 690 V for current peak value n=30 rated value 2.9 kVA  short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at 100 at AC-3 maximum at AC-4 maximum at AC-4 maximum 550 1/h at AC-4 maximum 550 1/h				
• at 690 V rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at				
operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum  oload switching frequency • at DC  10 000 1/h  operating frequency • at AC-3 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3 maximum • at AC-3 maximum • at AC-4 maximum • at AC-4 maximum • at AC-4 maximum • at AC-4 maximum	• at 400 V rated value	1.15 kW		
up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum shift in the formula of the formula	at 690 V rated value	1.15 kW		
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 2.9 kVA  short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC-1 maximum limited to 60 s switching at zero current maximum  10 000 1/h  operating frequency at AC-1 maximum at AC-2 maximum 10 000 1/h  at AC-3 maximum 750 1/h at AC-3 maximum 750 1/h at AC-4 maximum 750 1/h	operating apparent power at AC-6a			
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 2.9 kVA  short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum  limited to 10 s switching at zero current maximum  limited to 30 s switching at zero current maximum  limited to 30 s switching at zero current maximum  limited to 60 s switching at zero current maximum  roload switching frequency at DC  operating frequency  at AC-1 maximum  1 000 1/h  at AC-2 maximum  750 1/h at AC-3 maximum  750 1/h at AC-3 maximum  750 1/h at AC-4 maximum  2.7 kVA  3.3 kVA  4.3 kVA  4.5 kVA  4.2 kVA  4.3 kVA  4.2 kVA  4.3	• up to 230 V for current peak value n=20 rated value	1.5 kVA		
up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 2.2 kVA  up to 690 V for current peak value n=30 rated value 2.9 kVA  short-time withstand current in cold operating state up to 40 °C  ilmited to 1 s switching at zero current maximum ilmited to 5 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum at DC  operating frequency at DC  1 0 000 1/h  operating frequency at AC-3 maximum 750 1/h 250 1/h	<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>			
up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  up to 230 V for current peak value n=30 rated value  up to 400 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum  limited to 5 s switching at zero current maximum  limited to 10 s switching at zero current maximum  limited to 30 s switching at zero current maximum  limited to 60 s switching at zero current maximum  limited to 60 s switching at zero current maximum  at AC-1 maximum  1000 1/h  operating frequency  at AC-1 maximum  1000 1/h  at AC-2 maximum  750 1/h  at AC-3 maximum  at AC-3 maximum  750 1/h  at AC-3 maximum  at AC-4 maximum  250 1/h  250 1/h				
operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • limited to 1 s switching at zero current maximum  • limited to 1 s switching at zero current maximum  • limited to 1 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 3 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero curren				
<ul> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>2.2 kVA</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>liz d A; Use minimum cross-section acc. to AC-1 rated value</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero curren</li></ul>				
<ul> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>10 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> </ul>		1 kVA		
<ul> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching frequency</li> <li>at DC</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>				
• up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 40 s switching at zero current maximum  • limited to 4				
short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching frequency  • at DC  10 000 1/h   operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  • at AC-4 maximum  250 1/h				
• limited to 1 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum      • loo 00 1/h      • at AC-1 maximum     • at AC-2 maximum     • at AC-3 maximum     • at AC-3 maximum     • at AC-4 maximum     •		Z.J NVM		
<ul> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at DC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>				
<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at DC</li> <li>10 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>		120 A: Use minimum cross-section acc. to AC-1 rated value		
<ul> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at DC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> </ul>	-			
<ul> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at DC</li> <li>10 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>	-			
<ul> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at DC</li> <li>10 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 emaximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>				
no-load switching frequency       10 000 1/h         ● at DC       10 000 1/h         operating frequency       1 000 1/h         ● at AC-1 maximum       750 1/h         ● at AC-3 maximum       750 1/h         ● at AC-3e maximum       750 1/h         ● at AC-4 maximum       250 1/h				
● at DC  operating frequency  ● at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3e maximum  • at AC-4 maximum  • at AC-4 maximum  • at AC-4 maximum  250 1/h		TO A, USE MINIMUM GUSS-SECTION ACC. TO AC-1 Tated Value		
operating frequency         • at AC-1 maximum       1 000 1/h         • at AC-2 maximum       750 1/h         • at AC-3 maximum       750 1/h         • at AC-3e maximum       750 1/h         • at AC-4 maximum       250 1/h		10 000 1/b		
<ul> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>		10 000 1/11		
<ul> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>		4 000 4/1		
<ul> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>				
<ul> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul>				
• at AC-4 maximum 250 1/h	• at AC-3 maximum			
	• at AC-3e maximum			
Control circuit/ Control		250 1/h		
	Control circuit/ Control			

tune of voltage of the control cumply voltage	DC	
type of voltage of the control supply voltage	DC 24 V	
control supply voltage at DC rated value operating range factor control supply voltage rated value of	24 V	
magnet coil at DC		
initial value	0.8	
• full-scale value	1.1	
closing power of magnet coil at DC	4 W	
holding power of magnet coil at DC	4 W	
closing delay		
• at DC	30 100 ms	
opening delay		
• at DC	7 13 ms	
arcing time	10 15 ms	
control version of the switch operating mechanism	Standard A1 - A2	
Auxiliary circuit		
number of NO contacts for auxiliary contacts instantaneous	1	
contact		
operational current at AC-12 maximum	10 A	
operational current at AC-15		
• at 230 V rated value	10 A	
• at 400 V rated value	3 A	
• at 500 V rated value	2 A	
at 690 V rated value	1 A	
operational current at DC-12		
at 24 V rated value	10 A	
• at 48 V rated value	6 A	
• at 60 V rated value	6 A	
• at 110 V rated value	3 A	
• at 125 V rated value	2 A	
at 220 V rated value	1 A	
at 600 V rated value	0.15 A	
operational current at DC-13		
• at 24 V rated value	10 A	
• at 48 V rated value	2 A	
• at 60 V rated value	2 A	
• at 110 V rated value	1 A	
• at 125 V rated value	0.9 A	
at 220 V rated value	0.3 A	
at 600 V rated value	0.1 A	
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)	
UL/CSA ratings		
full-load current (FLA) for 3-phase AC motor		
at 480 V rated value	4.8 A	
at 600 V rated value	6.1 A	
yielded mechanical performance [hp]		
• for single-phase AC motor		
— at 110/120 V rated value	0.25 hp	
— at 230 V rated value	0.75 hp	
• for 3-phase AC motor		
— at 200/208 V rated value	1.5 hp	
— at 220/230 V rated value	2 hp	
— at 460/480 V rated value	3 hp	
— at 575/600 V rated value	5 hp	
contact rating of auxiliary contacts according to UL	A600 / Q600	
Short-circuit protection		
design of the fuse link		
for short-circuit protection of the main circuit		
with type of coordination 1 required	gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)	
with type of assignment 2 required	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)	
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)	
Installation/ mounting/ dimensions		

mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and	
	backward by +/- 22.5° on vertical mounting surface	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715	
<ul> <li>fastening method side-by-side mounting</li> </ul>	Yes	
height	58 mm	
width	45 mm	
depth	73 mm	
required spacing		
<ul> <li>with side-by-side mounting</li> </ul>		
— forwards	10 mm	
— upwards	10 mm	
— downwards	10 mm	
— at the side	0 mm	
<ul> <li>for grounded parts</li> </ul>		
— forwards	10 mm	
— upwards	10 mm	
— at the side	6 mm	
— downwards	10 mm	
• for live parts	40	
— forwards	10 mm	
— upwards	10 mm	
— downwards	10 mm	
— at the side	6 mm	
Connections/ Terminals		
type of electrical connection	perow type terminals	
for main current circuit     for auxiliary and control circuit	screw-type terminals	
<ul> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> </ul>	screw-type terminals	
at contactor for auxiliary contacts     of magnet coil	Screw-type terminals Screw-type terminals	
type of connectable conductor cross-sections	Corew type terminals	
• for main contacts		
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²	
— solid or stranded	2x (0.5 1,5 mm²), 2x (0.75 2,5 mm²), 2x 4 mm²	
finely stranded with core end processing	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
for AWG cables for main contacts	2x (20 16), 2x (18 14), 2x 12	
connectable conductor cross-section for main contacts		
• solid	0.5 4 mm²	
stranded	0.5 4 mm²	
finely stranded with core end processing	0.5 2.5 mm <sup>2</sup>	
connectable conductor cross-section for auxiliary contacts		
solid or stranded	0.5 4 mm²	
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²	
type of connectable conductor cross-sections		
• for auxiliary contacts		
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²	
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14), 2x 12	
AWG number as coded connectable conductor cross section		
• for main contacts	20 12	
for auxiliary contacts	20 12	
Safety related data		
product function		
mirror contact according to IEC 60947-4-1	Yes; with 3RH29	
suitability for use safety-related switching OFF	Yes; applies only to contactor operating mechanism	
proportion of dangerous failures		
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %	
with high demand rate according to SN 31920	73 %	
B10 value with high demand rate according to SN 31920	1 000 000	
failure rate [FIT] with low demand rate according to SN	100 FIT	

31920	
IEC 61508	
T1 value	
<ul> <li>for proof test interval or service life according to IEC 61508</li> </ul>	20 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	

## **General Product Approval**







Confirmation





Conoral	Product	Approval
General	Product	Approvai

**EMV** 

**Functional Saftey** 

**Test Certificates** 

<u>KC</u>





Type Examination Certificate

Special Test Certificate

Type Test Certificates/Test Report

**Test Certificates** 

Marine / Shipping

Miscellaneous











Marine / Shipping

other

**Dangerous Good** 

Environment





**Miscellaneous** 

Confirmation

**Transport Information** 



## Environment

Environmental Confirmations

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2015-1BB41

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2015-1BB41}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1BB41

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2015-1BB41&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1BB41/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2015-1BB41&objecttype=14&gridview=view1







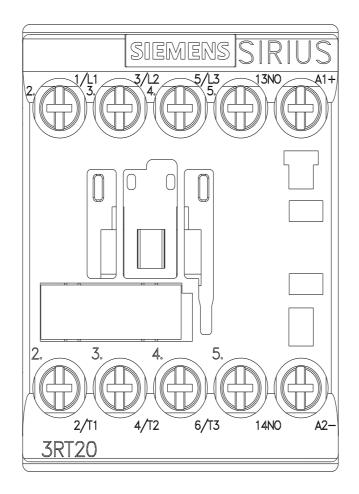

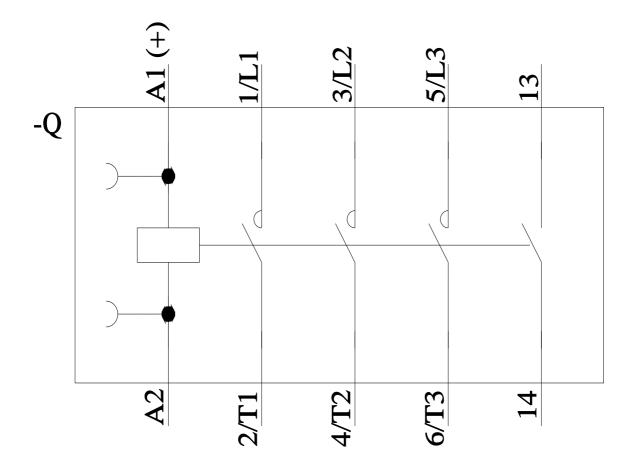

last modified: 3/15/2024 🖸