


### Hybrid terminal blocks with screw connection on one side, 6 (10) mm<sup>2</sup>


#### Notes:

1) For additional accessories and technical data, see page 140.

2) For screw connection rated data, see page 52.



41 A, test disconnect terminal block



52 A, feed-through terminal block, same shape


EAC

Dimensions	
	[mm]
Max. electrical data	
	[mm <sup>2</sup> ]
Rated data <sup>2)</sup>	
Rated voltage	[V]
Nominal current / cross section	[A] / [mm <sup>2</sup> ]
Description	
Description	Color
<b>Test disconnect terminal block</b> with test sockets	gray
<b>Feed-through terminal block</b> with test sockets	gray
Cover, width 2.2 mm	
Screwdriver	

Technical data <sup>1)</sup>				
Width	Length	Height		
8.2	73.9	48 (NS 35/7,5)		
I <sub>max.</sub> [A]	U <sub>max.</sub> [V]	max. Ø [mm <sup>2</sup> ]	AWG (UL)	
41	500	0.5 - 10	-	
IEC	UL / CUL	CSA	Ex	
Ordering data				
Type	Order No.	Pcs. / Pkt.		
PTU 6-T	3209535	50		
PTU 6-T-P	3209530	50		
Accessories <sup>1)</sup>				
D-PTU 6-T	3209533	50		
SZS 1,0X4,0 VDE	1205066	10		

Technical data <sup>1)</sup>			
Width	Length	Height	
8.2	73.9	48 (NS 35/7,5)	
I <sub>max.</sub> [A]	U <sub>max.</sub> [V]	max. Ø [mm <sup>2</sup> ]	AWG (UL)
52	800	0.5 - 10	-
IEC	UL / CUL	CSA	Ex
Ordering data			
Type	Order No.	Pcs. / Pkt.	
PTUD 6	3209531	50	
PTUD 6-P	3209537	50	
Accessories <sup>1)</sup>			
D-PTU 6-T	3209533	50	
SZS 1,0X4,0 VDE	1205066	10	

### Supplementary accessories for PTU 6-T test disconnect terminal blocks

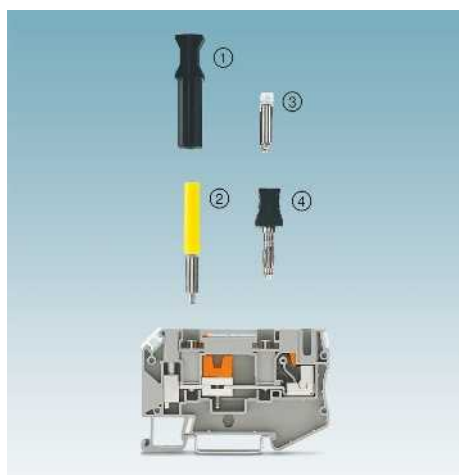

- Efficient wiring using push-in connection on the inside of the control cabinet
- Universal screw connection on the end customer side
- The following accessories are included for transformer short circuit and potential distribution:

- ① KSSI... insulated short-circuit plug
- ② PSBJ 6-T... test socket
- ③ SCBI 10-8,15... isolator bridge bar
- ④ KSS... short-circuit plug

Description	No. of pos.	Color
<b>Insertion bridge</b> , fully insulated	2	gray
	3	gray
	4	gray
	10	gray
<b>Fixed bridge</b> , 10-pos.	10	silver
<b>Isolator bridge bar</b> , 10-pos.	10	silver
<b>Test socket</b>		silver
<b>Partition plate</b> , 2 mm width		gray
<b>Short-circuit plug</b> , for short circuiting neighboring terminal blocks, fully insulated, 2-pos.	2	black
<b>Short-circuit plug</b> , for short circuiting neighboring terminal blocks, fully insulated, 2-pos., I <sub>max.</sub> 20 A	2	black
<b>Test socket</b> , for test connection with test plug PS		orange

Ordering data		
Type	Order No.	Pcs. / Pkt.
<b>EB 2-8</b>	0202154	100
<b>EB 3-8</b>	0202141	100
<b>EB 4-8</b>	0202142	100
<b>EB 10-8</b>	0202138	10
<b>SCBI 10-8,15</b>	3245134	10
<b>SCBI 10-8,15 ISO</b>	3000417	10
<b>TPS 3/20/5</b>	3246586	10
<b>ATP-URTK/SP</b>	0311139	10
<b>KSSI 2-8</b>	3000722	10
<b>KSS 8</b>	0311540	10
<b>PSBJ 6-T OG</b>	3070320	10