


# SLATER® PLASTIC BOXES

## Round Ceiling Boxes

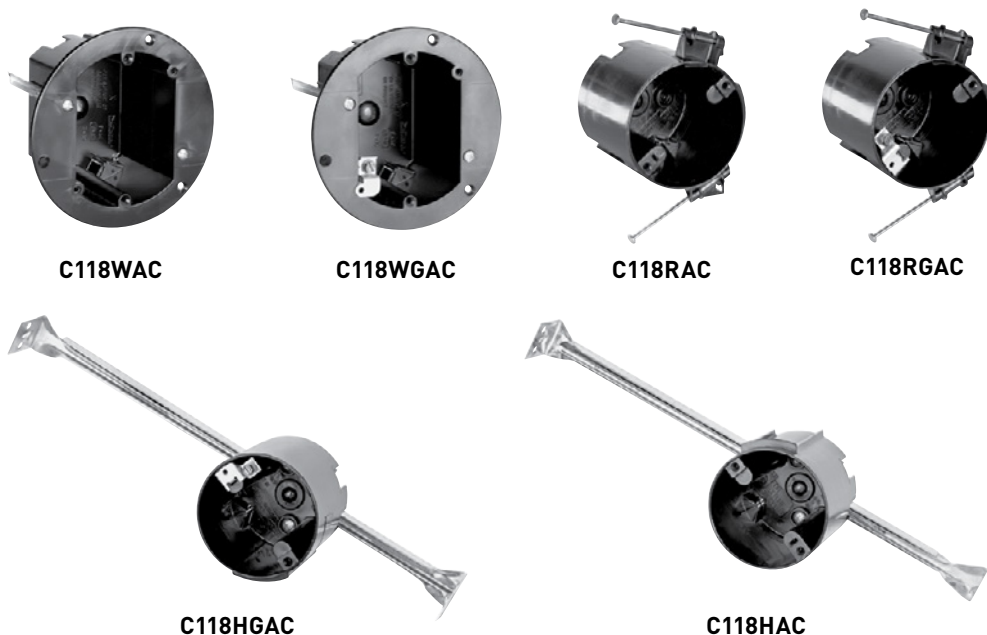

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS (IN.)		WIRES (AWG)	QTY. PER CARTON	UL LISTED MAX. WEIGHT RATING
			DIA.	DEPTH			FIXTURE
3¾" ROUND OLD WORK CEILING BOXES							
C118WAC	18.0	3¾" round. Swing brackets for mounting adjust from 1¼" down to ½". 4 Auto/Clamps®. Includes device mounting holes.	3¾	2 <sup>11</sup> / <sub>16</sub>	9 No. 14 8 No. 12 7 No. 10	50	20 lbs.
C118WGAC	18.0	3¾" round. With grounding lug. Swing brackets for mounting adjust from 1¼" down to ⅛". 4 Auto/Clamps®. Includes device mounting holes.	3¾	2 <sup>11</sup> / <sub>16</sub>	9 No. 14 8 No. 12 7 No. 10	50	20 lbs.
3¾" ROUND OLD WORK CEILING BOXES							
C118WACX	18.0	3¾" round. Same as C118WAC, except without swing brackets, for screw mounting into OSB or plywood. 4 Auto/Clamps®.	3¾	2 <sup>11</sup> / <sub>16</sub>	9 No. 14 8 No. 12 7 No. 10	50	8 lbs.
C118WGACX	18.0	3¾" round. Same as C118WGAC, except without swing brackets, for screw mounting into OSB or plywood. 4 Auto/Clamps®.	3¾	2 <sup>11</sup> / <sub>16</sub>	9 No. 14 8 No. 12 7 No. 10	50	8 lbs.
3¾" ROUND CEILING BOXES*							
C118RAC	18.0	3¾" round. 2 captive mounting nails. 4 Auto/Clamps.	3¾	3 <sup>5</sup> / <sub>32</sub>	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.
C118RGAC	18.0	3¾" round with ground lug. 2 captive mounting nails. 4 Auto/Clamps®.	3¾	3 <sup>5</sup> / <sub>32</sub>	9 No. 14 8 No. 12 7 No.10	50	50 lbs.
C118HAC	18.0	3¾" round. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps®.	3¾	3 <sup>5</sup> / <sub>32</sub>	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.
C118HGAC	18.0	3¾" round with ground lug. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps®.	3¾	3 <sup>5</sup> / <sub>32</sub>	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.

\*UL Classified for 2 Hour Fire Resistance.