



Dust Extraction

Automatic self-cleaning filter (VC1310L, VC2510L, VC3210L)

obtained by Triple filter structure composed of : Powder filter + Damper + Prefilter



When the power is switched on, Prefilter collapses into itself to compress Damper, and fits closely over Damper and Powder filter.



When the power is switched off, Damper expands back to its original size and shakes off dust from Prefilter automatically with its expanding power.



Allows for:

Constantly high suction power

Easy filter cleaning simply by tapping dust off of Prefilter

Quiet cleaning because Damper and Prefilter make no noise

GYUPPA!

VC2510LX1

Dust Class L GYUPPA Vacuum Cleaner (Wet & Dry)

173

Vacuum Cleaner

- GYUPPA automatic self-cleaning filter of our unique design allows for constantly high suction power
- Easy filter cleaning simply by tapping dust off of prefilter
- Quiet cleaning because Damper and Prefilter make no noise
- Powerful 1,050 W motor generates 3.5 m³/min of Max air flow / 22 kPa of Max sealed suction
- Approved for Dust Class L in accordance with the EU standard



Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly bag set

Continuous rating input	1,050W
Max peak air flow	2.0 m ³ / min
Max Sealed Suction	22.0 kPa
(water column)	(2,240 mmH ₂ O)
Tank capacity	Dust : 25 L
	Water : 14 L
Dimensions (L x W x H)	432x416x451 mm
	(17"x16-3/8"x17-3/4")
Net weight	10.5 kg (23.2 lbs.)
Power supply cord	5.0 m (16.4 ft)

VC2510LX1 - Rs. 40,000

VC3210LX1

32 L Dust Class L GYUPPA Vacuum Cleaner (Wet & Dry)

173

Vacuum Cleaner

- GYUPPA automatic self-cleaning filter of our unique design allows for constantly high suction power
- Easy filter cleaning simply by tapping dust off of prefilter
- Quiet cleaning because Damper and Prefilter make no noise
- Powerful 1,050 W motor generates 3.5 m³/min of Max air flow / 22 kPa of Max sealed suction
- Approved for Dust Class L in accordance with the EU standard



Hose, Holder 10-33, Front Cuffs (22, 24, 38), Poly bag set

Continuous rating input	1,050W
Max peak air flow	2.0 m ³ / min
Max Sealed Suction	22.0 kPa
(water column)	(2,240 mmH ₂ O)
Tank capacity	Dust : 32 L
	Water : 27 L
Dimensions (L x W x H)	552x398x685 mm
	(21-3/4"x15-5/8"x27")
Net weight	14.5 kg (32 lbs.)
Power supply cord	5.0 m (16.4 ft)

VC3210LX1 - Rs. 46,000

Blower

303

UB1102



















Continuous rating input	600W
Max Air Volume	4.1 m ³ /min
Max Air Velocity	91 m/s
Air Pressure	5.7 kPa
No Load Speed (RPM)	16,000
Vibration Level	Operation w/o Load: 2.5 m/s ²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	479x185x178 mm
	(18-7/8"x7-1/4"x7")
Net weight	1.9 - 2.2 kg (4.3 - 4.8 lbs.)
Power supply cord	2.5 m (8.2 ft.)




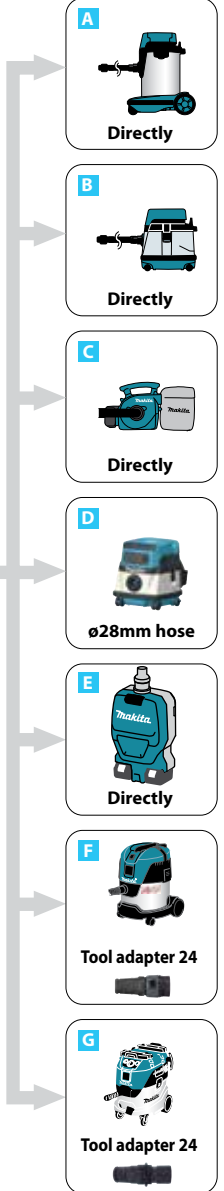
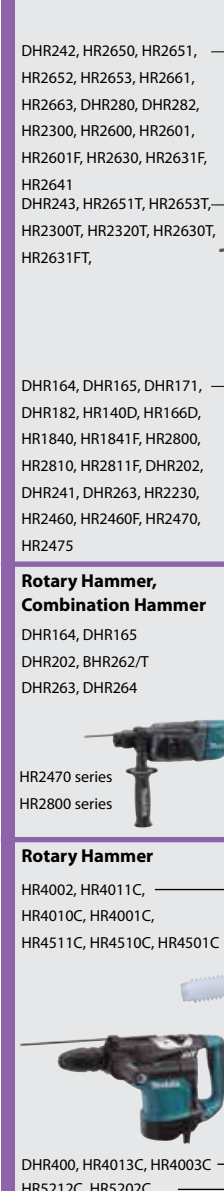


UB1102 - Rs. 6,800



System charts

<p>A</p>  <p>W/ Ø28mm Hose</p> <p>Model VC3211H VC3211M VC2211M VC3210L</p> <p>W/ Front cuffs</p>  <p>38 24 22</p>	<p>B</p>  <p>W/ Ø28mm Hose</p> <p>Model VC2510L VC1310L DVC861L DVC863L DVC864L</p> <p>W/ Front cuffs</p>  <p>38 24 22</p>	<p>C</p>  <p>W/ Ø28mm Hose</p> <p>Model DVC350</p> <p>W/ Front cuffs</p>  <p>38 24 22</p>	<p>D</p>  <p>W/ Ø38mm Hose</p> <p>Model DVC860L DVC861L DVC862L DVC863L DVC750L</p> <p>W/ Joint 22-38</p> 	<p>E</p>  <p>W/ Ø28mm Hose</p> <p>Model DVC261 DVC265</p> <p>W/ Front cuffs</p>  <p>38 24 22</p>	<p>F</p>  <p>W/ Ø32mm Hose</p> <p>Model VC2012L VC2512L VC3011L</p> <p>W/ Tool adapter Adapter 38 (option)</p> <p>24  </p> <p>P-81745 P-70421</p>	<p>G</p>  <p>W/ Ø32mm Hose</p> <p>Model VC3012L VC4010L VC3012M VC4010M</p> <p>W/ Tool adapter</p> <p>24  </p> <p>P-70378 W107418688</p>
---	---	--	---	---	---	--

For Model	Suction Systems and Part No.	For Model	Suction Systems and Part No.
<p>Rotary Hammer, Demolition Hammer</p> <p>SDS-MAX, 17mm (11/16") Hex: Bull points with over 280mm length Cold chisels with over 280mm length</p> <p>SDS-MAX only: Scaling chisel (for tile), Bushing tool Scaling chisels length</p> <p>19mm (3/4") Hex only Scaling chisels</p> <p>17mm (11/16") Hex: HM0830, HR3530, HR4030C</p> <p>SDS-MAX: HR4001C/02/10C/11C, HR4501C/10C/11C, HR3540C/41FC HM0870C/71C, HM1101C/11C, HM1203C/13C, HM1214C HR4501C/10C/11C, HR4013C HR4003C, HR3540C/41FC DHR400, HR5202C, HR5212C, HM1205</p> <p>19mm (3/4") Hex: HR4041C</p>	<p>Dust extractor attachment set (Hammering mode only) 199144-2 (w/hose for) 199143-4 (w/o hose for)</p>  <p>ø28mm hose can be directly connected.</p>	<p>Rotary Hammer, Combination Hammer see page 150</p> <p>DHR242, HR2650, HR2651, HR2652, HR2653, HR2661, HR2663, DHR280, DHR282, HR2300, HR2600, HR2601, HR2601F, HR2630, HR2631F, HR2641 DHR243, HR2651T, HR2653T, HR2300T, HR2320T, HR2630T, HR2631FT, HR2631FT,</p> <p>DHR164, DHR165, DHR171, DHR182, HR140D, HR166D, HR1840, HR1841F, HR2800, HR2810, HR2811F, DHR202, DHR241, DHR263, HR2230, HR2460, HR2460F, HR2470, HR2475</p> <p>Rotary Hammer, Combination Hammer DHR164, DHR165 DHR202, BHR262/T DHR263, DHR264</p> <p>HR2470 series HR2800 series</p>	<p>Dust extractor attachment 193472-7</p> <p>Vacuum attachment 195866-2</p> <p>(Max. Bit Diameter 40mm)</p> <p>DHR400, HR4013C, HR4003C HR5212C, HR5202C</p>
<p>Electric Breaker HM1304/B, HM1306, HM1317C/CB, HM1307C/CB, HM1400, HM1500/B, HM1810, HM1801, HM1812, HM1802</p> 	<p>Vacuum attachment set</p>  <p>197168-2 (w/o hose for) 197148-8 (w/ hose for)</p> <p>ø28mm hose can be directly connected.</p>	<p>Rotary Hammer HR4002, HR4011C, HR4010C, HR4001C, HR4511C, HR4510C, HR4501C</p>	<p>Tool adapter 24</p> <p>Tool adapter 38</p>
			

Items of standard equipment and specifications may vary by country or area.