

LED Tape and Extrusion


STANDARD LED tapes allow the customization of any area, as they can be surface mounted, recessed or suspended. These professional grade flexible LED tapes are ideal for a wide variety of applications, such as cabinetry, shelving, toe kicks, coves, edge lighting, etc.

Made of high quality LED chips, STANDARD's tapes offer durability, dimmability, high efficacy, constant colour and a CRI above 90. They will easily adapt to all task or accent lighting needs.

The tapes can be installed on their own with peel and stick 3M construction adhesive back or within a covered aluminum extrusion for a diffused effect. A wide variety of accessories are also available to complete the luminaire and allow for easy assembly; no soldering is needed with STANDARD's range of sturdy connectors.

All STANDARD tapes, extrusions and lenses are also offered in custom lengths. Contact our Inside Sales team with your requirements to receive a quote on made to measure components.

Note: a minimum of ¼ inch must be kept free of tape at each end of the extrusion length to allow for the end caps.

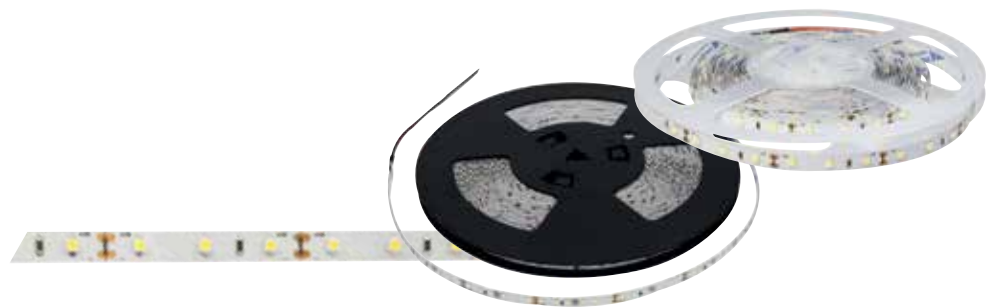


LED Tape

Order code	Description	Order code for custom length	Watts		Volts	Colour temp.	Lumen output (lm)		CRI	Life L70	Number of LED chips		Case qty
			(per ft.)	(per m)			(per ft.)	(per m)			(per ft.)	(per m)	
12 V - 16.4' (5 m)													
65895 ³	TAPE/16.4'/1.5W/30K/12V/IP22/60/8MM/STD	66327 ^{1 4}	1.5	4.8	12	3 000	110	360	90	50 000	18	60	25
65880 ³	TAPE/16.4'/1.5W/40K/12V/IP22/60/8MM/STD	66328 ^{1 4}	1.5	4.8	12	4 000	123	405	90	50 000	18	60	25
24 V - 16.4' (5 m)													
65881 ³	TAPE/16.4'/1.5W/30K/24V/IP22/60/8MM/STD	66329 ^{1 4}	1.5	4.8	24	3 000	107	350	90	50 000	18	60	25
65882 ³	TAPE/16.4'/1.5W/40K/24V/IP22/60/8MM/STD	66330 ^{1 4}	1.5	4.8	24	4 000	109	356	90	50 000	18	60	25
65883 ³	TAPE/16.4'/2.9W/24K/24V/IP22/120/8MM/STD	66331 ^{1 4}	2.9	9.6	24	2 400	172	566	90	50 000	37	120	25
65884 ³	TAPE/16.4'/2.9W/27K/24V/IP22/120/8MM/STD	66332 ^{1 4}	2.9	9.6	24	2 700	191	625	90	50 000	37	120	25
65885 ³	TAPE/16.4'/2.9W/30K/24V/IP22/120/8MM/STD	66334 ^{1 4}	2.9	9.6	24	3 000	194	635	90	50 000	37	120	25
65886 ³	TAPE/16.4'/2.9W/35K/24V/IP22/120/8MM/STD	66333 ^{1 4}	2.9	9.6	24	3 500	204	670	90	50 000	37	120	25
65887 ³	TAPE/16.4'/2.9W/40K/24V/IP22/120/8MM/STD	66338 ^{1 4}	2.9	9.6	24	4 000	226	740	90	50 000	37	120	25
65888 ³	TAPE/16.4'/2.9W/50K/24V/IP22/120/8MM/STD	66335 ^{1 4}	2.9	9.6	24	5 000	228	749	90	50 000	37	120	25
65889 ³	TAPE/16.4'/4.4W/30K/24V/IP22/180/8MM/STD	66336 ^{1 4}	4.4	14.5	24	3 000	300	984	90	50 000	55	180	25
65890 ³	TAPE/16.4'/4.4W/40K/24V/IP22/180/8MM/STD	66337 ^{1 4}	4.4	14.5	24	4 000	314	1 030	90	50 000	55	180	25
24 V - 16.4' (5 m) - IP67 wet location													
65893 ^{2 3}	TAPE/16.4'/2.9W/30K/24V/IP67/120/8MM/STD	-	2.9	9.6	24	3 000	186	609	90	50 000	37	120	25
65894 ^{2 3}	TAPE/16.4'/2.9W/40K/24V/IP67/120/8MM/STD	-	2.9	9.6	24	4 000	213	697	90	50 000	37	120	25
24 V - 65.6' (20 m)													
65891 ³	TAPE/65.6'/2.9W/30K/24V/IP22/120/8MM/STD	66334 ^{1 4}	2.9	9.6	24	3 000	194	635	90	50 000	37	120	25
65892 ³	TAPE/65.6'/2.9W/40K/24V/IP22/120/8MM/STD	66338 ^{1 4}	2.9	9.6	24	4 000	226	740	90	50 000	37	120	25

06

Dimensions & Cuts

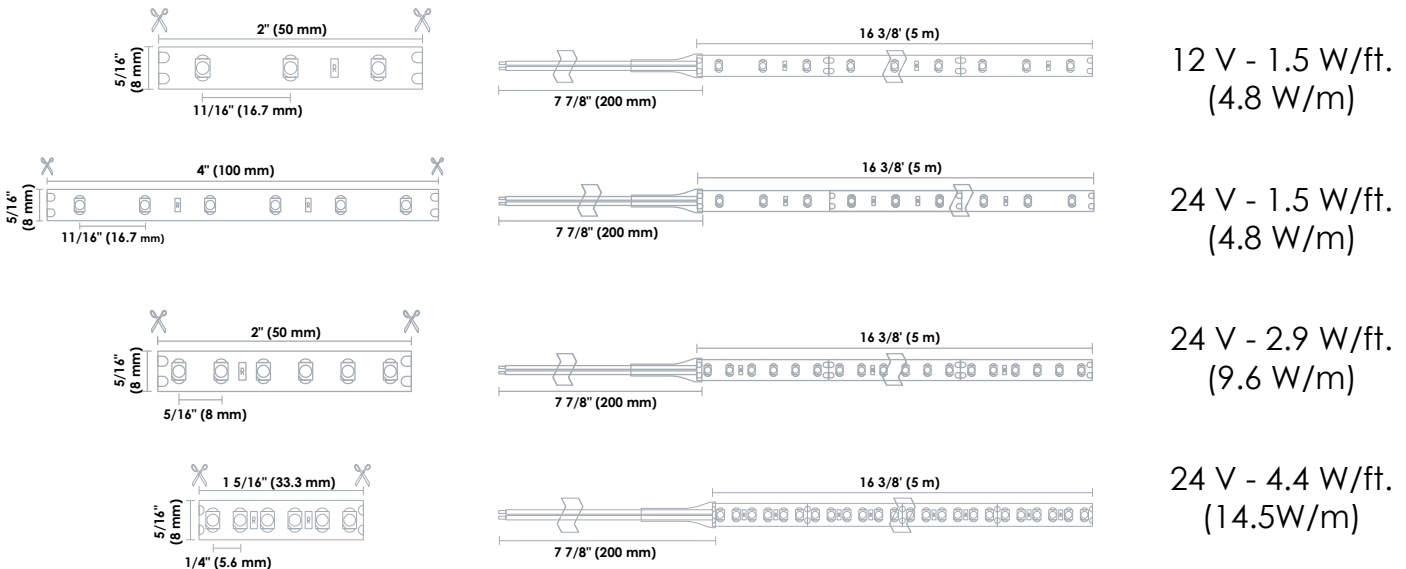

Lumen values are derived from photometric testing

For complete warranty information, please visit www.standardpro.com

¹ Available in custom lengths with the alternative order code

² STANDARD will assume no responsibility for any issue related to field cutting or terminating of IP67 tapes, resulting of poor workmanship

³ The LED tape reels are not returnable if already cut


⁴ Custom lengths of LED tapes are non-cancelable and non-returnable






End Cap (pack of 10)

Order code	Description	Type	Compatible with series	Case qty (master)
65896	EXTRUSION/100/ENDCAP/HOLE/STD 10P	Perforated	100	50
65897	EXTRUSION/100/ENDCAP/PLAIN/STD 10P	Plain	100	50
65898	EXTRUSION/200/ENDCAP/HOLE/STD 10P	Perforated	200	50
65899	EXTRUSION/200/ENDCAP/PLAIN/STD 10P	Plain	200	50
65900	EXTRUSION/210/ENDCAP/HOLE/STD 10P	Perforated	210	50
65901	EXTRUSION/210/ENDCAP/PLAIN/STD 10P	Plain	210	50
65904	EXTRUSION/300/ENDCAP/HOLE/STD 10P	Perforated	300	50
65905	EXTRUSION/300/ENDCAP/PLAIN/STD 10P	Plain	300	50
65902	EXTRUSION/400/ENDCAP/HOLE/STD 10P	Perforated	400	50
65903	EXTRUSION/400/ENDCAP/PLAIN/STD 10P	Plain	400	50
65906	EXTRUSION/500R/ENDCAP/HOLE/STD 10P	Perforated	500	50
65907	EXTRUSION/500R/ENDCAP/PLAIN/STD 10P	Plain	500	50

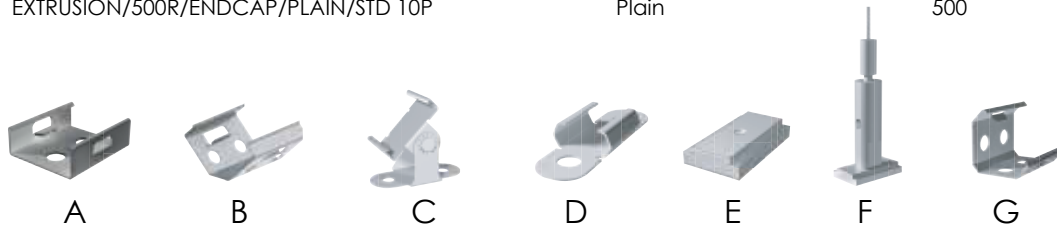

Fixing Clip (pack of 2)

Order code	Description	Type	Figure	Compatible with series	Case qty (master)
65908	EXTRUSION/FIXCLIP/180/STD 2P	180°	A	100, 200, 300, 400	100
65909	EXTRUSION/FIXCLIP/45/STD 2P	45°	B	100, 200, 400	100
65910	EXTRUSION/FIXCLIP/ADJ/STD 2P	Adjustable	C	100, 200, 400	100
65911	EXTRUSION/FIXCLIP/INV/STD 2P	Invisible	D	400	100
65913	EXTRUSION/MAGNET/STD 2P	Magnet	E	400	100
65912	EXTRUSION/SUSPENSIONKIT/STD	Suspension Kit (single pack)	F	400	50
65914	EXTRUSION/FIXCLIP/500/CORNER/STD 2P	For corner	G	500	100

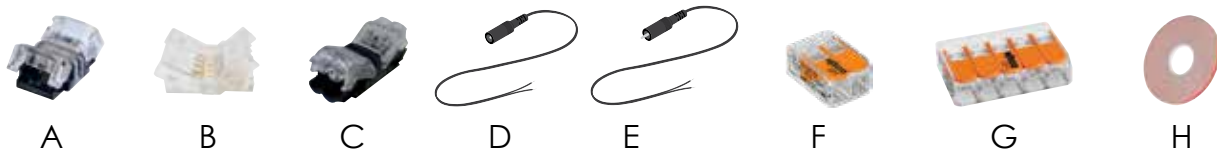

Connector and accessory

Order code	Description	Type	Figure	Qty per pack	Case qty (master)
Connector					
66130 ¹	TAPE/8MM/SINGLE_END_CONN/STD 10P	Tape to Wire (8mm)	A	10	300
66132	TAPE/8MM/IN_LINE_CONN/STD 10P	Tape to Tape (8mm)	A	10	300
66134 ¹	TAPE/8MM/SINGLE_END_CONN/IP67/STD 10P	Tape to Wire (8 mm - IP67)	B	10	300
66135	TAPE/8MM/IN_LINE_CONN/IP67/STD 10P	Tape to Tape (8 mm - IP67)	B	10	300
66239 ¹	TAPE/WIRE_TO_WIRE_CONN/STD 10P	Wire to Wire (8 mm)	C	10	300
66771 ²	TAPE/2WAY_WIRE_TO_WIRE_CONN/STD	Two way - Wire to wire	F	1	100
66242 ²	TAPE/5WAY_WIRE_TO_WIRE_CONN/STD 4P	Five way - Wire to wire	G	4	200
Accessory					
66240	TAPE/WIRE_TO_DC_FEMALE/STD	Wire to DC Female	D	1	50
66241	TAPE/WIRE_TO_DC_MALE/STD	Wire to DC Male	E	1	50
66243	TAPE/DOUBLE_FACE_33M/STD	Double Face Tape	H	1	10

¹ Compatible wire : 20-22 AWG TR64 type
² Compatible wire : 12-24 AWG

