

Product type designation

Product description

IE FC TP Flexible Cable GP 2 x 2 (Type B)

Flexible bus cable (4-core), sold by the meter, unassembled SIMATIC NET, IE FC FLEXIBLE CABLE, GP 2X2 (PROFINET TYP B) TP INSTALLATION CABLE W. FLEXIBLE CORES, PROFINET TYPE B, 4-WIRE, SHIELDED, CAT 5, SOLD BY THE M, MAX. CONSIGNMENT: 1000 M, MIN. ORDERING QUANTITY: 20 M

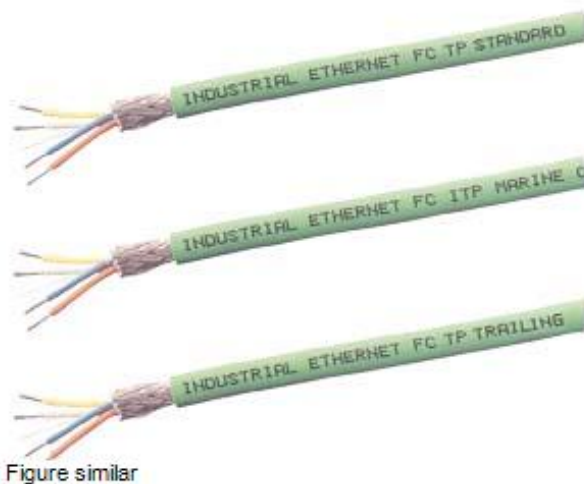


Figure similar

Suitability for use	For occasionally moved machine parts
Cable designation	2YY (ST) CY 2x2x0,75/1,5-100 LI GN SF/UTP

Electrical data

Damping ratio per length	
<ul style="list-style-type: none"> at 10 MHz / maximum at 100 MHz / maximum 	<p>0.06 dB/m</p> <p>0.21 dB/m</p>
Impedance	
<ul style="list-style-type: none"> at 1 MHz ... 100 MHz 	100 Ω
Relative symmetrical tolerance	
<ul style="list-style-type: none"> of the characteristic impedance at 1 MHz ... 100 MHz 	15 %
Near-end crosstalk per length	
<ul style="list-style-type: none"> at 1 MHz ... 100 MHz 	0.5 dB/m
Transfer impedance per length / at 10 MHz	20 mΩ/m
Loop resistance per length / maximum	120 mΩ/m
Operating voltage	
<ul style="list-style-type: none"> RMS value 	100 V

NVP value in percent	66 %
----------------------	------

Mechanical data

Number of electrical cores	4
Design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
Type of electrical connection / FastConnect	Yes
Core diameter	
• of AWG22 core	0.75 mm
Outer diameter	
• of inner conductor	0.75 mm
• of the wire insulation	1.5 mm
• of the inner sheath of the cable	3.9 mm
• of cable sheath	6.5 mm
Symmetrical tolerance of the outer diameter / of cable sheath	0.2 mm
Material	
• of the wire insulation	PE
• of the inner sheath of the cable	PVC
• of cable sheath	PVC
Color	
• of the insulation of data wires	white/yellow/blue/orange
• of cable sheath	green
Bending radius	
• with single bend / minimum permissible	32.5 mm
• with multiple bends / minimum permissible	52 mm
Tensile load / maximum	150 N
Weight per length	68 kg/km

Permitted ambient conditions

Ambient temperature	
• during operation	-25 ... +75 °C
• during storage	-25 ... +75 °C
• during transport	-25 ... +75 °C
• during installation	-10 ... +60 °C
• Note	Electrical properties measured at 20 °C, tests according to DIN VDE 0472
Burning behavior	flame resistant according to UL 1685 (CSA FT4)
Chemical resistance	
• to mineral oil	oil resistant according to IEC 60811-404 (7x24h/90°C)
• to grease	Conditional resistance
• to water	conditional resistance
Radiological resistance / to UV radiation	resistant

Product properties, functions, components / general

Product feature	
• halogen-free	No
• silicon-free	Yes
Cable length / for Industrial Ethernet	
• with 100BaseTX	85 m

Standards, specifications, approvals

UL/ETL listing / 300 V Rating	Yes; c(UL)us, CMG / PLTC / Sun Res / OIL RES
UL/ETL style / 600 V Rating	No
Certificate of suitability	
• CE marking	Yes
• RoHS conformity	Yes
Standard for structured cabling	Cat5e
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• Bureau Veritas (BV)	No
• Det Norske Veritas (DNV)	No
• Germanische Lloyd (GL)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (NK)	No
• Polski Rejestr Statkow (PRS)	No

Further Information / Internet Links

Internet-Link	
• to website: Selector SIMATIC NET SELECTION TOOL	http://www.siemens.com/snst
• to website: Industrial communication	http://www.siemens.com/simatic-net
• to website: Industry Mall	https://mall.industry.siemens.com
• to website: Information and Download Center	http://www.siemens.com/industry/infocenter
• to website: Image database	http://automation.siemens.com/bilddb
• to website: CAx Download Manager	http://www.siemens.com/cax
• to website: Industry Online Support	https://support.industry.siemens.com

last modified:

22.01.2016