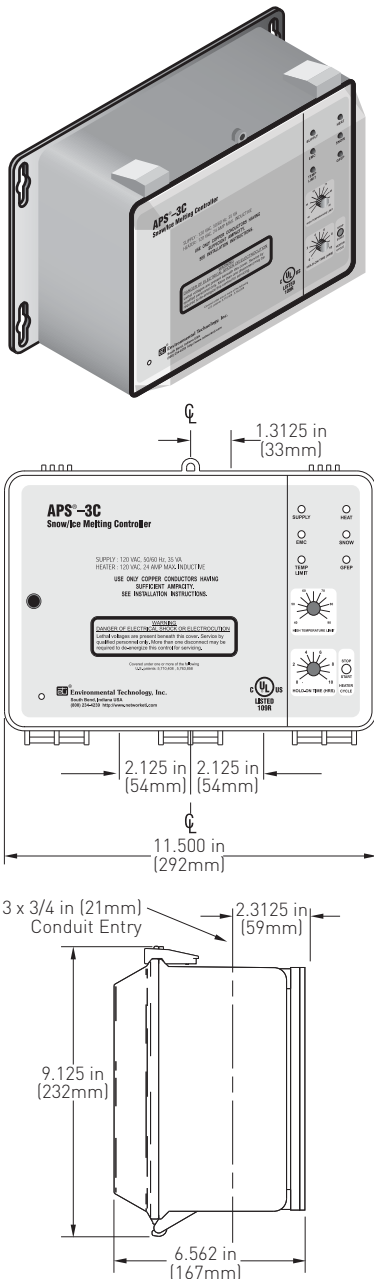



**APS-3C**  
 SNOW MELTING AND GUTTER DE-ICING CONTROLLER

**PRODUCT OVERVIEW**

The ETI® APS-3C snow melting and gutter de-icing controller when used with compatible sensors automatically controls surface snow melting and roof and gutter de-icing heating cables, ensuring minimum operating costs. Typical applications include pavement, sidewalk, loading dock, roof, gutter, and down spout snow/ice melting.

The adjustable hold-on timer continues heater operation for up to 10 hours after snow stops to ensure complete melting. The optional RCU-3 Remote Control Unit can be located where system operation can be conveniently observed. It duplicates many of the controls and indicators on the APS-3C front panel. It is used to clear tracked and drifting snow that may not land on a sensor.

The calibrated 40°F to 90°F (4°C to 32°C) high limit thermostat prevents excessive temperatures when using constant wattage and MI heating cables. It also permits safe testing at outdoor temperatures too high for continuous heater operation. The temperature sensor is included.

The APS-3C provides a relay closure interface for use with energy management computers (EMC). This feature can also be used for general purpose remote control and annunciation and other advanced applications.


All sensor and communications wiring is NEC Class 2. This simplifies installation while enhancing fire and shock safety. Multiple sensors provide superior performance by better matching the controller to site performance requirements. The APS-3C can interface up to six sensors.

The APS-3C does not provide ground-fault protection for the heating cable system. This protection is required and must be provided by other devices such as ground-fault circuit breakers or other control methods.

The APS-3C is an exceptionally capable surface snow melting and roof and gutter de-icing controller. For complete information describing its application, installation, and features, please contact your Pentair Thermal Management representative or visit our web site at [www.pentairthermal.com](http://www.pentairthermal.com).

**GENERAL**

Area of use Nonhazardous locations  
 Approvals



**ENCLOSURE**

Protection NEMA 3R  
 Cover attachment Hinged polycarbonate cover, lockable  
 Entries Three 1-1/16" entries  
 Material Polycarbonate  
 Mounting Wall mounted

**CONTROL**

Supply voltage APS-3C-120 V: 120 V 50/60 Hz  
 APS-3C-208/240 V: 208/240 V 50/60 Hz  
 Contact type Form C  
 Maximum ratings Voltage: 240 V  
 Current: 24 A  
 Heater hold-on timer 0 to 10 hours; actuated by snow stopping or toggle switch  
 System test Switch toggles the heater contact on and off. If temperature exceeds high limit, heater cycles to prevent damage.

**SNOW/ICE SENSORS**

Sensor input Up to 6 sensors; CIT-1, GIT-1, SIT-6E  
 Circuit type NEC Class 2  
 Lead length Up to 500 ft (152 m) using 18 AWG 3-wire jacketed cable  
 Up to 2,000 ft (609 m) using 12 AWG 3-wire jacketed cable

**HIGH LIMIT THERMOSTAT**

Adjustment range 40°F to 90°F (4°C to 32°C)  
 Dead band 1°F (0.6°C)  
 Sensor type Thermistor  
 Circuit type NEC Class 2  
 Lead length Up to 500 ft (152 m) using 18 AWG 2-wire jacketed cable  
 Up to 1,000 ft (504 m) using 12 AWG 2-wire jacketed cable





**ENERGY MANAGEMENT COMPUTER (EMC) INTERFACE**

Inputs OVERRIDE ON (10 mA dry switch contact)  
 OVERRIDE OFF (10 mA dry switch contact)  
 Outputs SUPPLY (10 mA dry switch contact)  
 SNOW (10 mA dry switch contact)  
 HEAT (10 mA dry switch contact)  
 HIGH TEMP (10 mA dry switch contact)  
 REMOTE (10 mA dry switch contact)

**ENVIRONMENTAL**

Operating temperature -40°F to 160°F (-40°C to 71°C)  
 Storage temperature -50°F to 180°F (-45°C to 82°C)

**ORDERING DETAILS**

Catalog number	Part number	Description
APS-3C-120V	P000000781	APS-3C Snow Melting and De-Icing Controller, 120 V
APS-3C-208/240V	P000000782	APS-3C Snow Melting and De-Icing Controller, 208/240 V
<b>Snow/Ice Sensors</b>		
 CIT-1	512289-000	CIT-1 Snow sensor
 GIT-1	126795-000	GIT-1 Gutter sensor
 SIT-6E	P000000112	SIT-6E Pavement snow sensor
 RCU-3	P000000883	RCU-3 Remote control unit

**LIMITED WARRANTY**

ETI's two year limited warranty covering defects in workmanship and materials applies.



[WWW.PENTAIRTHERMAL.COM](http://WWW.PENTAIRTHERMAL.COM)

**NORTH AMERICA**

Tel: +1.800.545.6258  
Fax: +1.800.527.5703  
Tel: +1.650.216.1526  
Fax: +1.650.474.7711  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

**EUROPE, MIDDLE EAST, AFRICA**

Tel: +32.16.213.511  
Fax: +32.16.213.603  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

**ASIA PACIFIC**

Tel: +86.21.2412.1688  
Fax: +86.21.5426.2917  
[cn.thermal.info@pentair.com](mailto:cn.thermal.info@pentair.com)

**LATIN AMERICA**

Tel: +1.713.868.4800  
Fax: +1.713.868.2333  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

All Pentair trademarks and logos are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2009–2013 Pentair.