



CA - INDUSTRIAL GRADE CIRCULATING FANS

NOTE: CA FAN HEADS REPLACE CFH FAN HEADS

Canarm LFI's CA circulating fans economically provide relief from summer heat by creating a gentle air movement. They effectively cool large areas in factories, stores, restaurants and other public places. These fans have a low RPM motor which allows them to operate quietly.

The Floor Pedestal type fans come with a sturdy base and are supported by an adjustable tubular steel post which provides maximum stability. The Wall Mount fans are anchored with a sturdy wall bracket. There is also an optional ceiling mount.

On all fan models, the fan assembly can be tilted on a swivel bracket to direct air stream upwards or downwards. Available with oscillating motor on the pedestal and wall models.

FEATURES

- Rugged, high performance model.
- Available in 24" & 30" sizes.
- 1/4 HP, 3 speed, totally enclosed ball bearing motor with thermal overload protection.
- Fan motor RPM - 1100/950/850.
- Available with oscillating motor on the pedestal and wall models.
- Heavy gauge aluminum, well balanced fan blades.
- Air stream adjustable in all directions.
- Complete with 10', 120V grounded cord set.
- Attractive powder coated front and rear guards, meet OSHA standards.



PERFORMANCE SPECIFICATIONS

MODEL NUMBER	FAN SIZE	DESCRIPTION	CFM	VOLT	AMPS	SHIPPING WEIGHT (LBS)
HEADS ONLY						
CA24-C	24"	3 SPEED	7100/6300/5300	115	2.7	40
CA24OSC-C		3 SPEED OSCILLATING	7100/6300/5300	115	2.7	40
CA30-C	30"	3 SPEED	8300/7300/6300	115	2.7	50
CA30OSC-C		3 SPEED OSCILLATING	8300/7300/6300	115	2.7	50

QUICK REFERENCE

Use this table to make sure you order the correct fan replacement parts.




FAN HEAD MOUNTING ACCESSORIES SHOWN BELOW.

OLD MODEL	REPLACED WITH
PEDESTAL FANS - OSCILLATING	
CA24POSC-C	CA24OSC-C + CFKPB
CA30POSC-C	CA30OSC-C + CFKPB
PEDESTAL FANS - NON OSCILLATING	
CA24P-C	CA24-C + CFKPB
CA30P-C	CA30-C + CFKPB

OLD MODEL	REPLACED WITH
WALL FANS - OSCILLATING	
CA24WOSC-C	CA24OSC-C + CFWB
CA30WOSC-C	CA30OSC-C + CFWB
WALL FANS - NON OSCILLATING	
CA24W-C	CA24-C + CFWB
CA30W-C	CA30-C + CFWB

VELOCITY MAPPING CHARTS

These charts indicate the air distribution patterns of the CA fans. They are a graphic illustration of air velocity in feet per minute.

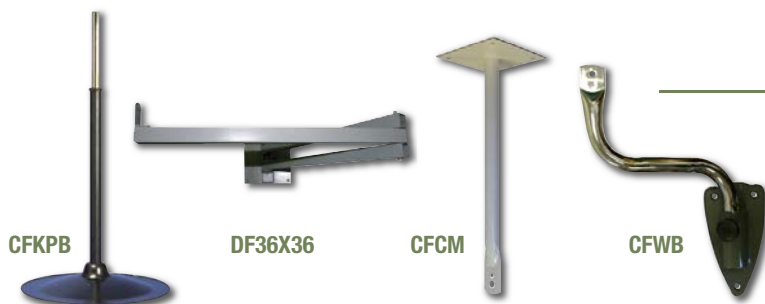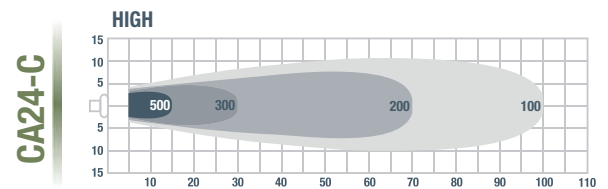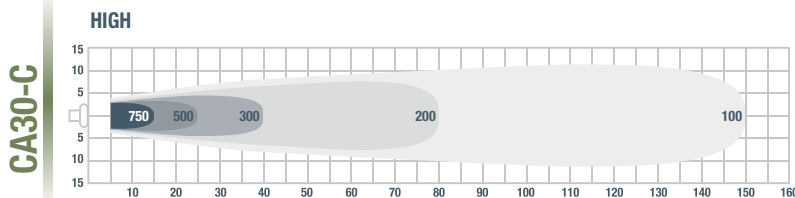

MOUNTING ACCESSORIES

MODEL	DESCRIPTION	WEIGHT (LBS)
CFKPB	KNOCK DOWN PEDESTAL BASE	36
CFWB	WALL BRACKET	6
CFCM	CEILING MOUNT (NON OSCILLATING FANS ONLY)	9
DF36X36	DOCK ARM	-