

## Type 3R Painted Galvanized Steel Wallmount Enclosure C3R

HCRMD Series

Continuous Hinge Door with Screws



### Application

- Designed for use as a wiring/junction box.
- Provides protection against rain, sleet, snow and dripping water.

### Standards



- UL-50 Type 3R
- CSA Type 3R
  - Complies with
  - NEMA Type 3R
  - IEC 60529, IP24

### Construction

- Formed and spot welded from 16 or 14 gauge galvanized steel.
- Drip shield top and seam-free sides, front and back.
- Stainless steel continuous hinge.
- Cover fastened with captive plated screws.
- Padlocking hasp.
- Collar studs provided for mounting optional panels.
- External mounting feet.
- Oil resistant gaskets are permanently secured.

### Finish

- Enclosure and cover are finished inside and out in ANSI 61 gray powder coating.

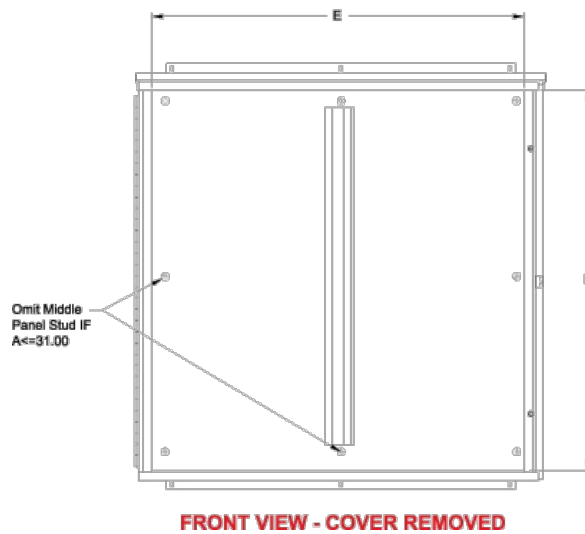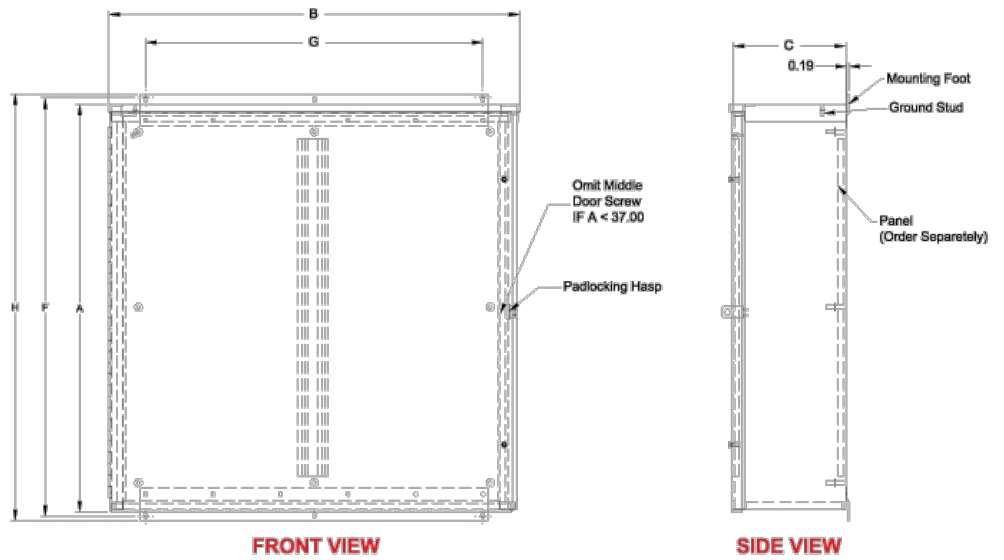

Part No.	Optional Panel Part Number	Panel Size			Mounting	Overall	Shipping			
		A	B	C				D	E	F
C3R16126HCR	18P1309	16.00	12.00	6.00	13.00	9.00	17.00	5.00	18.00	17
C3R16166HCR	18P1313	16.00	16.00	6.00	13.00	13.00	17.00	13.00	18.00	18
C3R18186HCR	18P1515	18.00	18.00	6.00	15.00	15.00	19.00	13.00	20.00	20
C3R20166HCR	18P1713	20.00	16.00	6.00	17.00	13.00	21.00	13.00	22.00	25
C3R20208HCR	18P1717	20.00	20.00	8.00	17.00	17.00	21.00	13.00	22.00	38
C3R24208HCR	18P2117	24.00	20.00	8.00	21.00	17.00	25.00	13.00	26.00	41
C3R24248HCR	18P2121	24.00	24.00	8.00	21.00	21.00	25.00	13.00	26.00	53
C3R30248HCR	18P2721	30.00	24.00	8.00	27.00	21.00	31.00	13.00	32.00	62
C3R30308HCR	18P2727	30.00	30.00	8.00	27.00	27.00	31.00	27.00	32.00	64
C3R181810HCR	18P1515	18.00	18.00	10.00	15.00	15.00	19.00	13.00	20.00	22
C3R242410HCR	18P2121	24.00	24.00	10.00	21.00	21.00	25.00	13.00	26.00	59
C3R302410HCR	18P2721	30.00	24.00	10.00	27.00	21.00	31.00	13.00	32.00	71
C3R363610HCR	18P3333	36.00	36.00	10.00	33.00	33.00	37.00	30.00	38.00	82
C3R303012HCR	18P2727	30.00	30.00	12.00	27.00	27.00	31.00	27.00	32.00	102
C3R362412HCR	18P3321	36.00	24.00	12.00	33.00	21.00	37.00	13.00	38.00	102
C3R363012HCR	18P3327	36.00	30.00	12.00	33.00	27.00	37.00	27.00	38.00	103
C3R423012HCR	18P3927	42.00	30.00	12.00	39.00	27.00	43.00	27.00	44.00	113
C3R363612HCR	18P3333	36.00	36.00	12.00	33.00	33.00	37.00	27.00	38.00	119
C3R423612HCR	18P3933	42.00	36.00	12.00	39.00	33.00	43.00	27.00	44.00	131
C3R483612HCR	18P4533	48.00	36.00	12.00	45.00	33.00	49.00	27.00	50.00	153

<b>C3R603612HCR 18P5733</b>	60.00	36.00	12.00	57.00	33.00	61.00	27.00	62.00	176
<b>C3R303016HCR 18P2727</b>	30.00	30.00	16.00	27.00	27.00	31.00	27.00	32.00	105
<b>C3R483616HCR 18P4533</b>	48.00	36.00	16.00	45.00	33.00	49.00	27.00	50.00	155

*Data subject to change without notice.*

© 2013. Hammond Manufacturing Ltd. All rights reserved.