

Terminal blocks - CLIPLINE complete

1.5 mm² ST... spring-cage connection terminal blocks

General technical data for 1.5 mm² ST... spring-cage connection terminal blocks

Rated data		IEC 60947-7-1 / IEC 60947-7-2			
Rated cross section	[mm ²]	1.5			
Cross section range	AWG	28 - 16			
Connection capacity		solid	stranded	Ferrule without/with plastic sleeve	
1 conductor	[mm ²]	0.08 - 1.5	0.08 - 1.5	0.14 - 1.5	0.14 - 1.5
2 stranded conductors with a TWIN ferrule	[mm ²]	-	-	-	0.5
General data					
Stripping length	[mm]	10			
Insulating material		PA			
Inflammability class according to UL 94		VO			

Note: additional or deviating data is documented for the product.

Notes:




In addition to the product, the internal electrical wiring is provided as a circuit diagram. Free connection points for bridging are indicated by a black dot.

The specified technical data and approvals refer to the first product in each column. For information on the products below, please refer to phoenixcontact.net/products

¹⁾ The bridge current is documented for the respective product. For additional colors, see page 340.

System accessories for 1.5 mm² ST... spring-cage connection terminal blocks

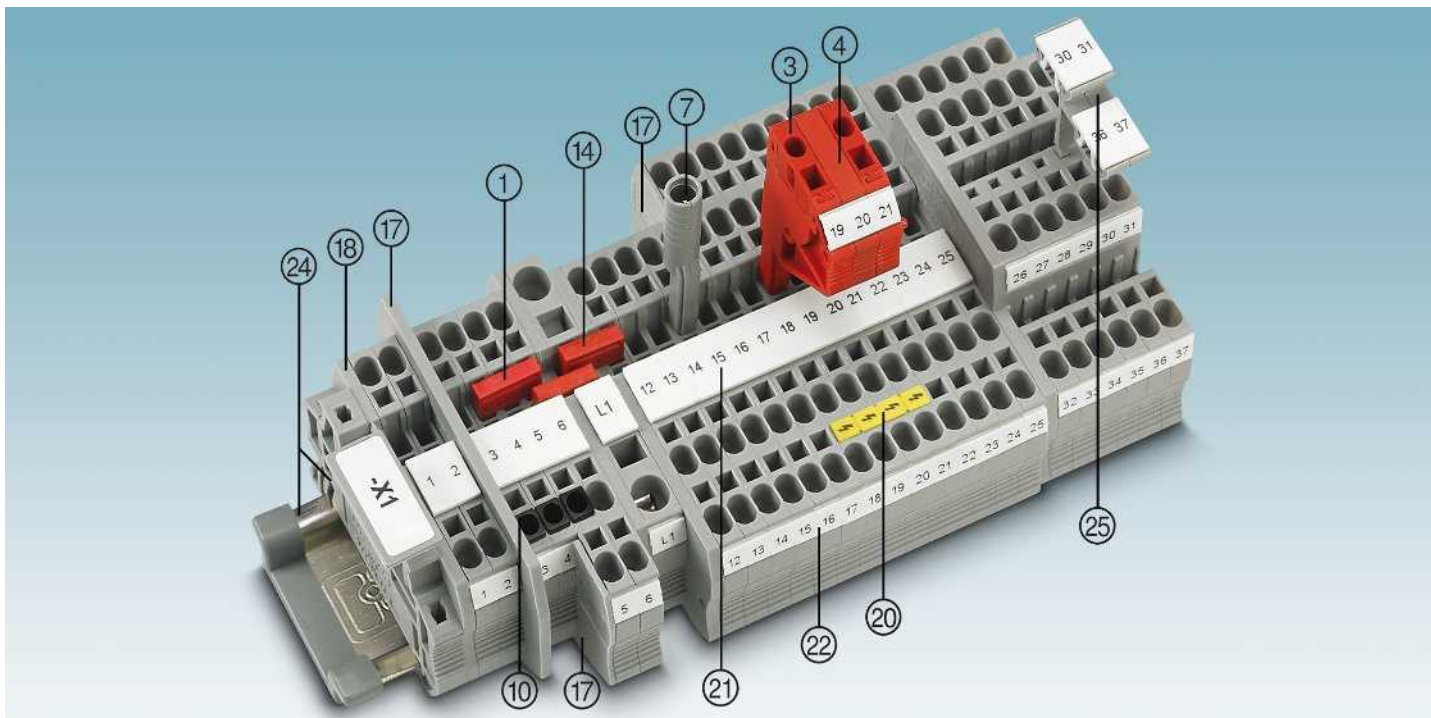

Description	Number of positions	Color	Type	Order No.	Pcs. / Pkt.	Type	Order No.	Pcs. / Pkt.
① Jumper ¹⁾	2	red	FBS 2-4	3030116	50			
	3	red	FBS 3-4	3030129	50			
	4	red	FBS 4-4	3030132	50			
	5	red	FBS 5-4	3030145	50			
	10	red	FBS 10-4	3030158	10			
	20	red	FBS 20-4	3030352	10			
③ Modular test plug		red	PS-4	3030970	10			
④ Spacer plate		red	DP PS-4	3036712	10			
⑦ Test adapter, 4 mm socket hole		gray	PAI-4-N GY	3032871	10			
⑩ Insulating sleeve		white	ISH 1,5/0,2	3206131	50			
0,25 - 0,5 mm ²		gray	ISH 1,5/0,5	3031034	50			
Screwdriver			SZF 0-0,4X2,5	1204504	10			

⑭ Reducing bridge	For RB ..., see page 344.
⑰ Partition plates/end cover segments	For ATP-... / DS-..., visit phoenixcontact.net/products
⑱ Cover	Documented for the product.
⑳ Warning labels	For WS ..., see page 353.
㉑ Center groove marking	UC-TM 4, UCT-TM 4 or ZB 4. See also Catalog 5, selection tables from page 100.
㉒ Center and lateral groove marking	UC-TMF 4, UCT-TMF 4 or ZBF 4. See also Catalog 5, selection tables from page 100.
㉓ DIN rails and end brackets	See Catalog 5.
㉔ Marker carrier	For STP ..., see page 352.
For full accessories, visit phoenixcontact.net/products	Note: additional or deviating accessories are documented for the product.