# SHDXL | XLERATOR™

HAND DRYER







# THE STANDARD IN HIGH VELOCITY

The first high velocity hand dryer on the market, the Xlerator sets the standard for quality and performance in its category. The Xlerator dries hands in seconds, making it the ultimate choice in washrooms with high traffic, such as stadiums, arenas and public places. Its reinforced, die-cast zinc alloy shell make it virtually unbreakable. The first choice for LEED® buildings, the Xlerator is the ideal high velocity hand dryer!

DRIES HANDS IN ONLY 8 SECONDS†!

LED WARNING LIGHT
IN CASE OF PROBLEMS

PERFECT FOR LEED®
BUILDINGS

CHOICE OF 5 COLOURS AND CUSTOMIZATION WITH YOUR LOGO

#### **COLOURS**

- **standard:** white, white polymer
- luxurious finish: chrome, graphite or brushed stainless steel (surcharge)

### **FINISH**

• epoxy-polyester powdercoat

### **MANUFACTURING**

- rib reinforced shell, solidly constructed of die-cast zinc alloy
- lightweight, unbreakable and rustproof
- secured to its supporting wall bracket with two chrome-plated, tamper-proof bolts

#### SOUND LEVEL

• 71 dBA (81 dBA with hands)

#### **ELEMENT**

 nichrome element producing instant heat

#### CONTROL

- infrared optical sensor located next to the air outlet activates hand dryer
- 35-second lockout feature is activated if hands are not removed before this time

#### **INSTALLATION**

wall mounted

# WARRANTY

- five years, \*three years on electronic components
- † Dry time and energy use testing performed by SGS International on standard XLERATOR Hand Dryer with 0.8 in. nozzle to 0.25 g or less of residual moisture, pursuant to the UL Environment Global Product Category Rules (PCR) for Hand Dryers.

TECHNICAL SPECIFICATIONS											
PRODUCT	PC	WER (WATT	S)	VOLTAGE	AMPERAGE	WEI	GHT	PRICE			
CODE	ELEMENT	MOTOR	TOTAL	VOLTS	AMPERES	KG	LB	W	BW	GR	CH OR SS
SHDXLAS1	1000	500	1500	120	12.5	7.3	16	971.00	886.00	1026.00	1112.00
SHDXLAS2	1000	500	1500	208-240-277	6.5	7.3	16	971.00	886.00	1026.00	1112.00

 ${\sf Add\ W\ for\ white, BW\ for\ white\ polymer\ BMC, CH\ for\ chrome, SS\ for\ brushed\ stainless\ steel\ or\ GR\ for\ graphite.}$ 





	ENERGY SAVINGS	AIR SPEED OR AIR FLOW	HEATING POWER	NOISE LEVEL	DRYING TIME
		ADJUSTABLE	<u></u>	•••**)	*
			<u>&amp;</u>		
ADJUSTABLE PARAMETERS: HEAT, MOTOR AND RANGE Ideal for: schools, arenas, stadiums and busy public places			<u>{</u>		

<sup>\*</sup>At maximum capacity

RECOMMENDED INSTALLATION HEIGHTS  Distance between floor and bottom of hand dryer							
MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED			
45 in. (115 cm)	43 in. (110 cm)	41 in. (105 cm)	35 in. (90 cm)	37 in. (95 cm)			






# **ACCESSORIES**


### **RECESS KIT**

The recess kit is comprised of a stainless steel, satin finish wall box and mounting plate. When installed with the recess kit, the XLERATOR takes up less than 4 in. (10 cm) of wall depth, meeting ADA Protrusion Requirements (Americans with Disabilities Act).

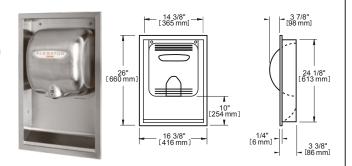

# HEPA FILTRATION SYSTEM

Stelpro offers the only certified HEPA filtration system proven to remove 99.97% of bacteria and particles from the air.



# **WALL GUARD**

STAINLESS STEEL

The wall guard protects the wall under the hand dryer from drops of water due to wet hands being blown dry, keeping bacteria from forming on the wall.



PRODUCT	DESCRIPTION	PRICE
SHDXL-40525	HEPA filter kit	346.00
SHDXL-40520	HEPA replacement filter	185.00
SHDXL-94	Replacement pre-filter with stainless steel mesh screen	58.25
SHDXL-40502	Stainless steel recess kit	368.00
SHDXL-89W	Wall guard - white (15 3/4 in. x 31 3/4 in. x 1/16 in 40 cm x 81 cm x 0.16 cm) - set of two	289.00
SHDXL-89B	Wall guard - black (15 3/4 in. x 31 3/4 in. x 1/16 in 40 cm x 81 cm x 0.16 cm) - set of two	289.00
SHDXL-89S	Wall guard - stainless steel (15 3/4 in. x 31 3/4 in. x 1/16 in. – 40 cm x 81 cm x 0.16 cm) – set of two	460.00

# TECHNICAL DRAWINGS

