


# SWITCHES

## Industrial Extra Heavy-Duty Specification Grade & Security Switches 15 & 20A, 347VAC; 20A, 120/277VAC
























### 15 & 20 Amp

### Canadian 347VAC

### Features

- External screw-pressure-plate back and side wired. Accepts #14 – #10 AWG copper or copper-clad conductors.
- Heavy-gauge one-piece copper alloy contact arm virtually eliminates contact bounce.
- Cam controls fast “make” and positive “break” to minimize arcing.
- Heavy-duty bumper pads for quiet operation.
- High strength thermoplastic polycarbonate toggle.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Oversized silver alloy contacts for long life and better heat dissipation.
- Grounding terminal is standard.
- Shallow design for ease of installation.
- Nickel-plated steel strap with integral ground.
- Auto-ground clip assures positive ground.

CATALOG NUMBER		RATING			3rd PARTY COMPLIANCE
SINGLE POLE	THREE-WAY	A.	VAC		 C22.2 111
347VAC TOGGLE SWITCHES BACK & SIDE WIRE					
 PS371510I	 PS371530I	15	347	Ivory	•
 PS371510W	 PS371530W	15	347	White	•
 PS371510	 PS371530	15	347	Brown	•
 PS371510GRY	 PS371530GRY	15	347	Gray	•
 PS371510BK	 PS371530BK	15	347	Black	•
 PS371510RED	 PS371530RED	15	347	Red	•
 PS372010I	 PS372030I	20	347	Ivory	•
 PS372010W	 PS372030W	20	347	White	•
 PS372010	 PS372030	20	347	Brown	•
 PS372010GRY	 PS372030GRY	20	347	Gray	•
 PS372010BK	 PS372030BK	20	347	Black	•
 PS372010RED	 PS372030RED	20	347	Red	•
 PS372010LA	 PS372030LA	20	347	Light Almond	•
 PS372010L	 PS372030L	20	347	Gray, Locking	•

### Features

- Back and side wired. Accepts #14 – #10 AWG.
- Operated by cam lock for maximum security in critical areas.
- Recommended for tamper-proof installation in schools, public housing, trailer parks, freight yards, etc.
- Uses same key as Cat. #4600 cast enclosure.
- Key can be removed in both positions.


CATALOG NUMBER				RATING		3rd PARTY COMPLIANCE		
SINGLE POLE	DOUBLE POLE	THREE-WAY	FOUR-WAY	A.	VAC	UL20	FSUL WS896	C22.255
<b>SECURITY SWITCHES BACK &amp; SIDE WIRE</b>								
PS20AC1KL	PS20AC2KL	PS20AC3KL	PS20AC4KL	20	120/277	•	•	•
PS372010KL				20	347	•	•	•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

Stainless Steel Plate for PS20ACKL Switches Single Gang – SS717, Double Gang – SS727.

For custom combinations specify opening Style No. 302.

Catalog Number 4609 Security Switch Replacement Keys for PS20ACKL Switches (2 keys furnished with each switch).





### Security Switch

All devices listed on this page conform to NEMA WD-1 and WD-6.

## DEVICES &amp; WALL PLATES

## Color Selection Chart


## Devices &amp; Plastic Wall Plate Colors

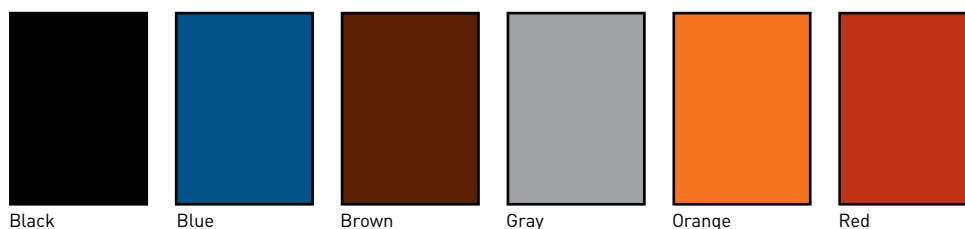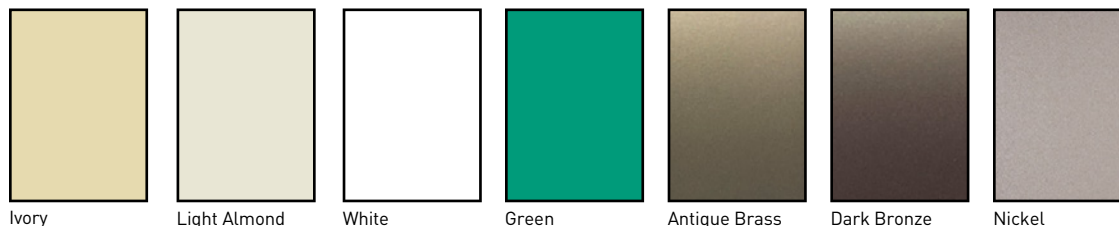

See specific device and wall plate catalog charts for particular color availabilities.



## Metal Wall Plates

## Metal Finish

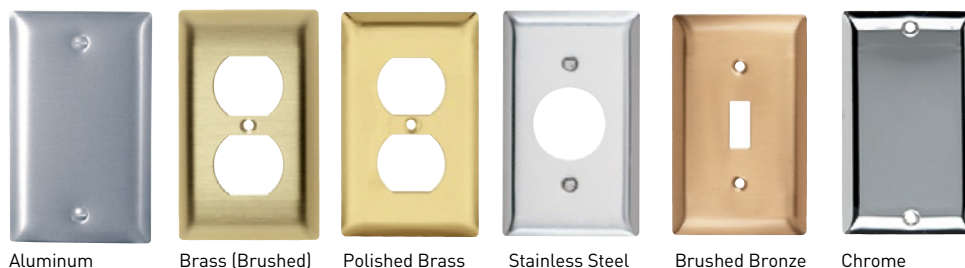

## Custom Metal Wall Plates Paint Finish Colors

## Paint Color

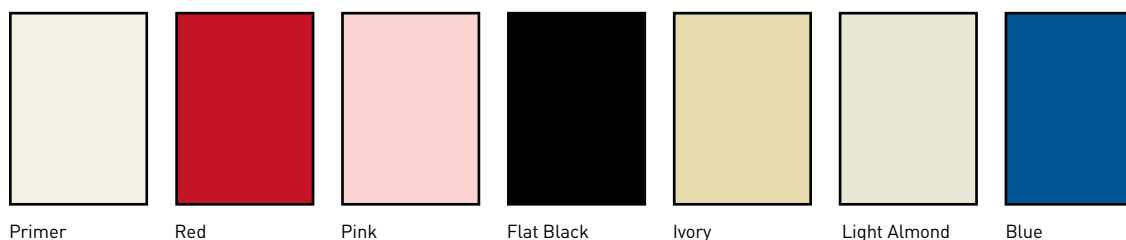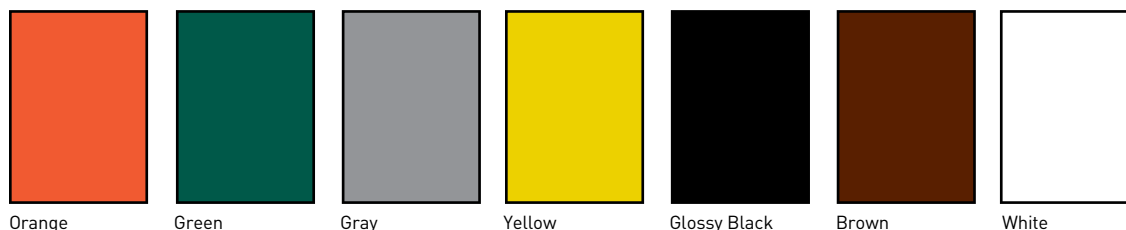

To order custom metal wall plates, see Pages P-41 – P-45.

**For additional colors consult factory.**

All devices listed on this page conform to NEMA WD-1 and WD-6.