


Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

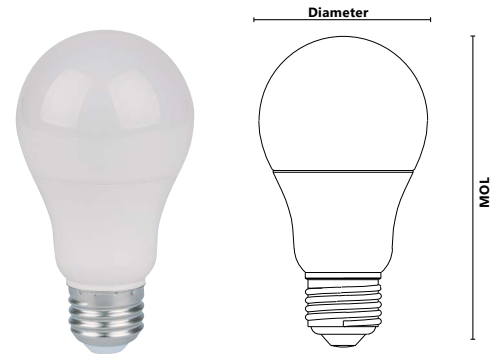

MOL: 4 11/32 in. (110 mm) Dia.: 2 3/8 in. (60 mm)

ORDERING INFORMATION

Order code: 66183
 Description: LED/A19/S4/9.8W/50K/STD
 UPC: 69549661837
 Case quantity: 6 / 48

PERFORMANCE DATA

Shape: A19
 Wattage (W): 9.8
 Base: E26
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 5 000
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 800
 Initial lumens per watt (lm/W): 82
 CRI: 80
 Beam angle (°): 220
 Power factor: 0.98
 THD (%): 17
 Operating temperature range: - 20 °C / - 4 °F to 45 °C / 113 °F

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %

DIMMER COMPATIBILITY LIST

Cooper	AAL06, DAL06P, SLC03P
Leviton	6615, 6674, DSM10-1LZ, IPL06
Lutron	DVCL-253P, DVELV-300P, MACL-153P



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.