


Magnet coil for contactors 18.5 kW 600 V AC, 60Hz, for motor contactors, Size S0, Screw terminal

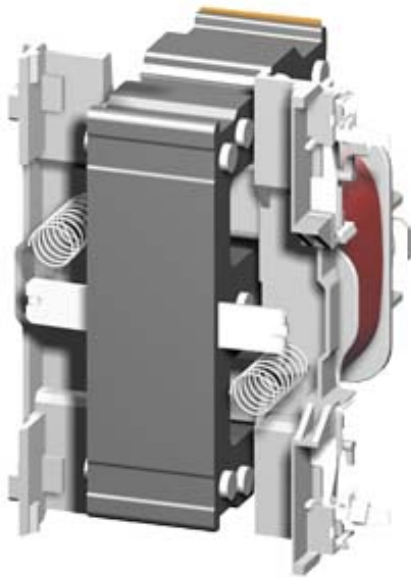

### General technical data

Product brand name	SIRIUS
Product designation	Magnet coil

### Control circuit

Type of voltage of the control supply voltage	AC
Power loss [V·A] of magnet coil at AC typical	9.8 V·A
Control supply voltage	
<ul style="list-style-type: none"> <li>• 1 at AC</li> <li>— at 50 Hz rated value</li> </ul>	660 V
Operating range factor control supply voltage rated value of magnet coil at AC	
<ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>	0.8 ... 1.1 0.85 ... 1.1

### Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity	Shipping Approval
--------------------------	-----	---------------------------	-------------------



[Miscellaneous](#)



other

[Confirmation](#)



Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-5AT61>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-5AT61>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-5AT61>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2926-5AT61&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-5AT61&lang=en)

last modified:

01/18/2020