

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and more.

CONSTRUCTION

Features a white acrylic diffuser and is available in 11" and 14" sizes. Hidden cam-latches provide easy diffuser removal for installation and maintenance.

OPTICS

11" units produce 1100 lumens and 14" units produce 1600 lumens at 50,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 11" Standard input = 16 watts, 69 lumens per watt.

14" Standard input = 24 watts, 67 lumens per watt. Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included.

LISTINGS

UL Certified to US and Canadian safety standards and listed suitable for damp locations. ENERGY STAR® certified

WARRANTY

5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/support/customer-support/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Decorative Indoor

LED Low Profile Square

Flush Mount



HIGH-PERFORMANCE LED



Specifications

Height: FMLSL 11 – 2-7/8 (7.3)

FMLSL 14 – 3-1/8 (7.9)

Width: FMLSL 11 – 11 (27.9)

FMLSL 14 – 13-11/16 (34.7)

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

Example: FMLSL 11 14840

Series Module/CRI	Color temperature
FMLSL 11 148 11" LED Low Profile Square Flush Mount, > 80 CRI	30 3000 K
FMLSL 14 208 14" LED Low Profile Square Flush Mount, > 80 CRI	40 4000 K

Notes

1 4000 K only stocked in 20".

Replacement Parts: Order as separate catalog number.	
DFMLSL11 M4	Replacement lens for 11"
DFMLSL14 M4	Replacement lens for 14"

LED Low Profile Square Flush Mount

SUGGESTED DIMMERS


The FMLS is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120


LED Low Profile Square Flush Mount

PHOTOMETRICS

FMLS L 11 14840, test no. LTL23006, tested in accordance to IESNA LM-79.

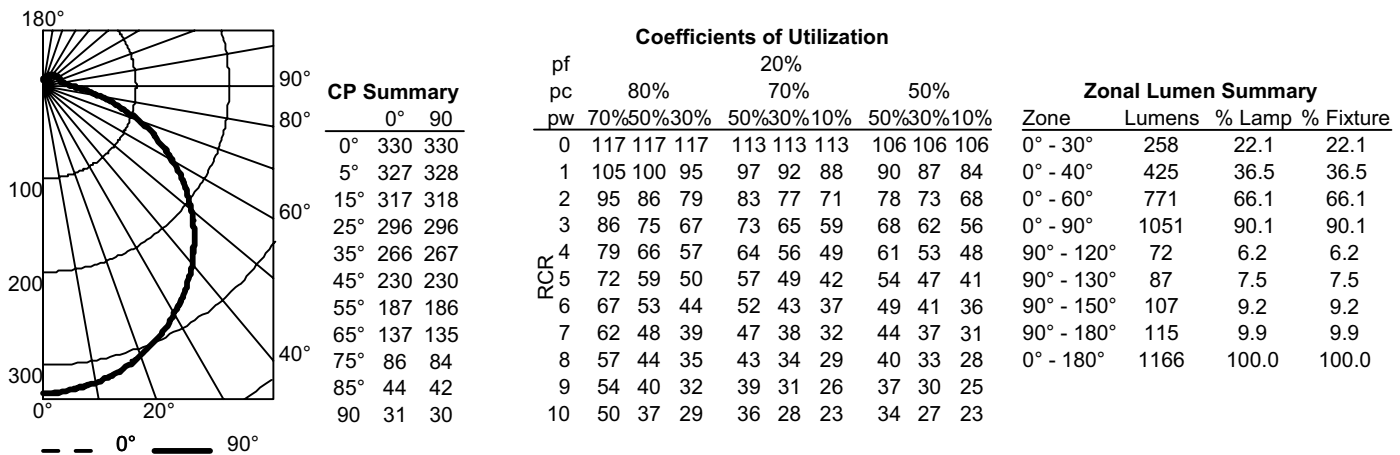

FMLS L 14 20840, test no. LTL23005, tested in accordance to IESNA LM-79.

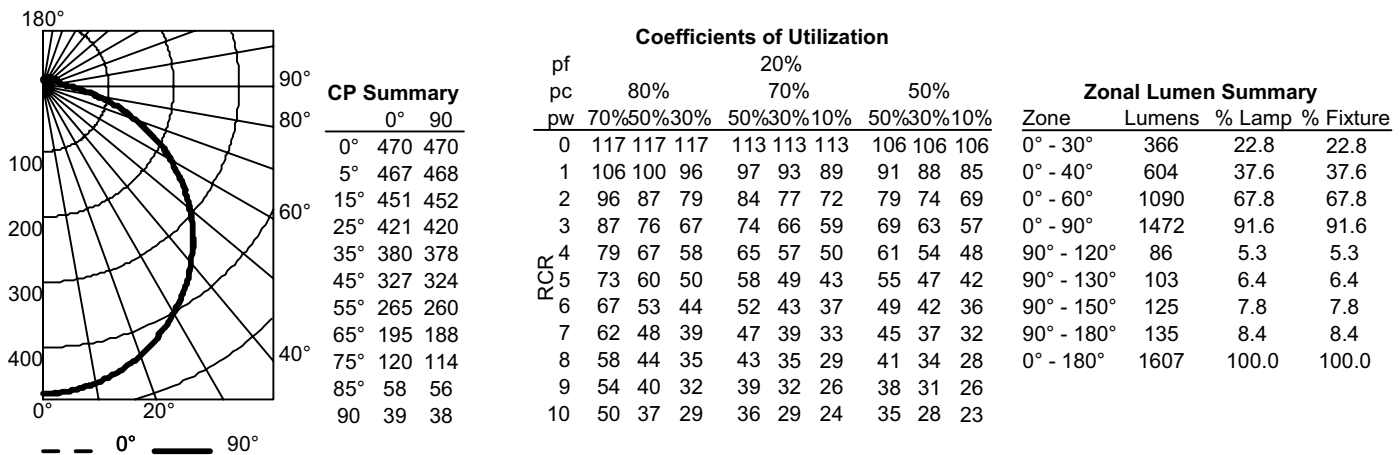

FMLS D L 20 35840, test no. ISF 32661, tested in accordance to IESNA LM-79.

