



SL8-LED60

LED Strip Light

SPECIFICATIONS*

Watts	63.73
Lumens	7428
Efficacy	116.55
Replaces Up To	2 Lamp 8ft T8
Colour Temp**	Variable - 3K, 4K, 5K
Certification	cULus, IP20, DLC
Operating Temp	-30°C to +40°C
Voltage	120-277*, 347V
LED Life	50,000 hours
Housing Material	Steel
Lens Material	Polycarbonate
Lens Type	Frosted
Mounting	Surface mount, Surface mount, suspended mounting using linear ceiling pendant mount
Total Harmonic Distortion	6
Power Factor	0.99

*Standard

**Colour temperature is variable and can be adjusted on the fixture with a switch. The default switch setting is set to 4K on the fixture. Light output varies according to the colour temperature selected as seen in the spec table on page 2.



DESCRIPTION

The SL8-LED60 strip light provides a highly efficient lumen output of approx. 7000 lumens ideal for replacing 2 lamp 8ft T8 fixtures.. The frosted linear lens provides uniform light distribution ideal for use in shops, coves and general area lighting.

APPLICATIONS



Shops



Cove Lighting



General Area Lighting

FEATURES

- Fixture can be set at a colour temperature of 3000K, 4000K or 5000K through a switch inside the housing
- Narrow, linear design with frosted lens for uniform light distribution
- Join up to 12 fixtures on a single circuit using easy connector steel plates.
- Options: dimming high frequency sensor, wire cage, reflector wings, linear ceiling pendant mount kit

*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.

OTHER MODEL SPECIFICATIONS

DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
SL8-LED60-B-VK-DIM	120-277	63.73	6864	107.7	5.89	0.9939	3137	83.5
	120-277	63.73	7428	116.55	6	0.99	4000	>80
	120-277	63.73	6864	107.07	6	0.99	5000	>80
SL8-LED60-C-VK-DIM	347	64.70	6992	108.07	14.62	0.949	3000	83.4
	347	64.70	7567	116.95	14.62	0.949	4000	83
	347	64.70	6992	108.07	14.62	0.949	5000	83.4

LEGEND


B - 120V-277V, C-347V

VK - Variable CCT

Colour temperature is variable and can be adjusted on the fixture with a switch.
Light output varies according to the colour temperature selected as seen in above table.

DIM - DIMMABLE

DIMENSIONS

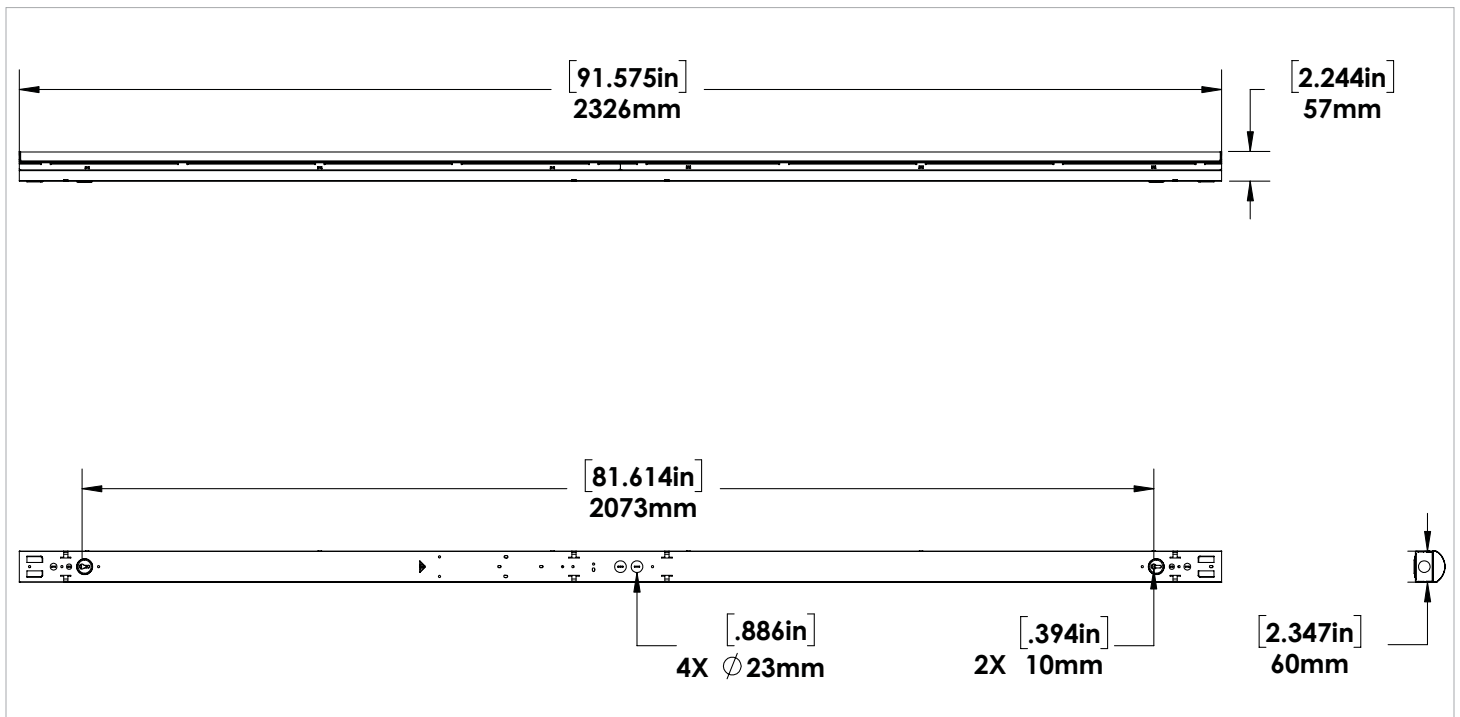

COLOUR TUNABLE SWITCH

1. 5000K
2. 4000K
3. 3000K

The switch is located inside of the fixture.

1. 5000K
2. 4000K
3. 3000K

(Default switch setting)

Easily change the colour temperature with the flip of a switch.

1. TOP position = 5000K
2. MIDDLE position = 4000K
3. BOTTOM position = 3000K

ACCESSORIES

Linear Ceiling Pendant Mount Kit

Contains 2 x 5 foot aircraft cables with ceiling mounting plates, fixture mounting rod and nut, 6 drywall anchors, and 6 screws.

SKU 09814