

## Individual Spec Sheet

# LPDL™ CHOICE

## LED LOW PROFILE DOWNLIGHT

### ORDERING INFORMATION

<b>Order code:</b>	68305
<b>Model number:</b>	LPDL4R-11A-3CWH/CHOICE
<b>UPC:</b>	69549015845
<b>Case quantity:</b>	32

### PHYSICAL DATA

<b>Size in (mm):</b>	4 3/4 (120)
<b>Shape:</b>	Round
<b>Finish:</b>	White
<b>Lens type:</b>	Frosted polycarbonate
<b>Mounting:</b>	Recessed
<b>Cable Rating:</b>	FT4

### PERFORMANCE DATA

<b>Watts (W):</b>	11
<b>Volts (V AC):</b>	120
<b>Color temperature (K)<sup>1</sup>:</b>	2 700 / 3 000 / 4 000
<b>Lumen output (lm)<sup>2</sup>:</b>	700 / 750 / 750
<b>Lumen per Watts (lm/W):</b>	63 / 68 / 68
<b>CRI:</b>	80+
<b>Life L70 (h)<sup>3</sup>:</b>	54 000
<b>Beam angle (°):</b>	100
<b>Environment:</b>	Damp location
<b>THD (%):</b>	<15%
<b>Power factor:</b>	>0.9
<b>Frequency (Hz):</b>	60
<b>Operating temp. range:</b>	- 20 °C / - 4 °F to 40 °C / 104 °F
<b>Dimmable:</b>	Yes

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### COMPATIBLE ACCESSORIES

Order code	Model number	Type
66051	ACC/MPLATE/4.25/SQR/STD	Square mounting plate
66058	ACC/MPLATE/4.25/ADJ/STD	Adjustable mounting plate
66821	ACC/MPLATE/4.25IN/HANG.BARS/STD	Mounting plate with hanger bars
66143	ACC/4/VAPOR BARRIER/STD	Vapor barrier extender
68986	GOOF RING-4.25IN	Goof rings
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' extension cord




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

**COMPATIBLE DIMMERS**

Brand	Model
LUTRON	RRD-6NA, PD-6WCL, DVCL-153P, CTCL-153P, AYCL-253P, DVRP-253, SELV-300P
LEVITON	DSM10-1LZ

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.


**DIMENSIONS**

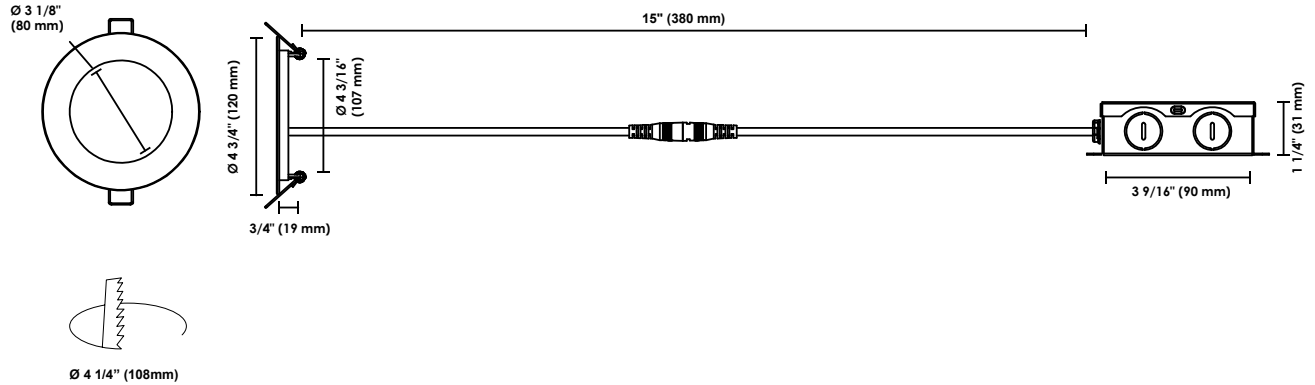

**PHOTOMETRIC DATA<sup>1</sup>**

**68305 • LPDL4R-11A-3CWH/CHOICE (30K) • 727.1 lm**

**Polar candela distribution**

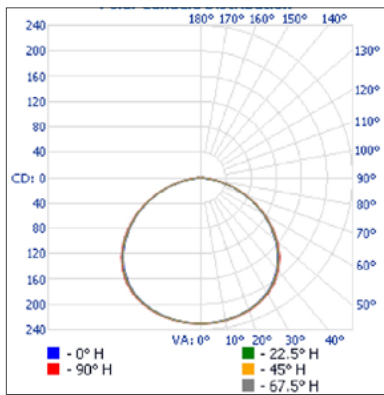

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	186.3	25.6%
0-40	312.1	42.9%
0-60	569.0	78.3%
60-90	158.1	21.7%
0-90	727.1	100%

**Illuminance at a distance**

Center beam fc	Beam width	
	5.8'	6.1'
1.7'	79.8	11.3'
3.3'	21.2	17.2'
5.0'	9.22	23.0'
6.7'	5.14	28.5'
8.3'	3.35	34.4'
10.0'	2.31	35.6'

■ Vert. spread: 119.6°  
■ Horiz. spread: 121.4°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.