## SIEMENS

## Data sheet

## 3SU1051-0AB50-0AA0



Illuminated pushbutton, 22 mm, round, metal, shiny, blue, pushbutton, flat, momentary contact type

product brand name	SIRIUS ACT		
product designation	Illuminated pushbuttons		
design of the product	Actuating/signaling element		
product type designation	3SU1		
product line	Metal, shiny, 22 mm		
Enclosure			
number of command points	1		
Actuator			
design of the actuating element	Flat button		
principle of operation of the actuating element	momentary contact type		
product extension optional			
light source	Yes		
contact module	Yes		
color of the actuating element	blue		
material of the actuating element	plastic		
shape of the actuating element	round		
outer diameter of the actuating element	29.5 mm		
Front ring			
product component front ring	Yes		
design of the front ring	Standard		
material of the front ring	Metal, high gloss		
color of the front ring	silver		
General technical data			
protection class IP	IP66, IP67, IP69(IP69K)		
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13		
shock resistance			
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms		
vibration resistance			
<ul> <li>according to IEC 60068-2-6</li> </ul>	10 500 Hz: 5g		
operating frequency maximum	3 600 1/h		
mechanical service life (operating cycles) typical	3 000 000		
reference code according to IEC 81346-2	S		
Substance Prohibitance (Date)	10/01/2014		
Ambient conditions			
ambient temperature			
<ul> <li>during operation</li> </ul>	-25 +70 °C		
during storage	-40 +80 °C		
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)		
Installation/ mounting/ dimensions			

height		29.5 n	nm		
width	29.5 mm				
shape of the installation opening		round			
mounting diameter		22.3 n	nm		
positive tolerance of installation diameter		0.4 mr	m		
mounting height		11 mn	n		
installation width		29.5 n	nm		
installation depth		24.3 n	nm		
ertificates/ approvals					
General Product Approval				Declaration of Conformity	
(SP)	<u>Confirmation</u>	UL.	EHC	UK CA	CE EG-Konf.
Test Certificates		Marine / Shipping			
<u>Type Test Certific-</u> ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS	Hoyds Register uis	PRS	RINA
other	Environment				
Confirmation	Environmental Con- firmations				
urther information	I to exit the Russian marl				

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1051-0AB50-0AA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1051-0AB50-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1051-0AB50-0AA0 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1051-0AB50-0AA0&lang=en

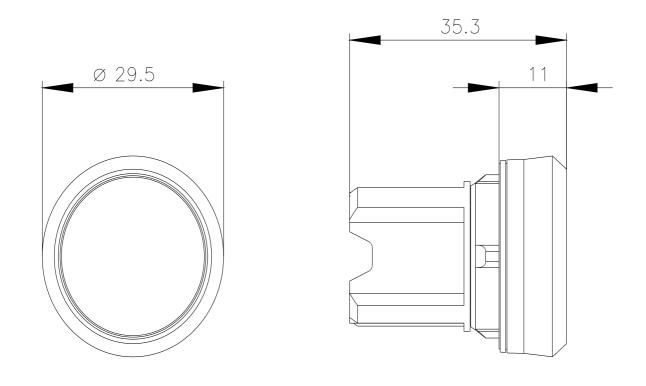

last modified:

1/26/2022 🖸