

MWP04 Mini Wall Pack

10W/15W/20W | 3CCT | 120-347V

The successor to our MWP03 Mini Wall Packs!
Ideal for security lighting, commercial entrances,
stairways, perimeter areas, and more

Wet Location Rated

IP65

Colour Selectable

3000K / 4000K / 5000K

Low Glare, Frosted
Polycarbonate Lens

Built-In Photocell

120-347V
Universal Driver
0-10V dimming



Bronze Powder
Coat Finish

Also Available In Black



Power Selectable
10W / 15W / 20W



TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	125.27 lm/W
CCT	3000K/4000K/5000K
CRI	82
Beam Angle	100°
Dimmable	0-10V
L70 Life	>54,000 hrs
Warranty	10-year

LUMEN OUTPUT			
	3000K	4000K	5000K
10W	1322 lm	1394 lm	1437 lm
15W	1898 lm	2023 lm	2058 lm
20W	2557 lm	2729 lm	2749 lm

APPROVALS & LISTINGS

cUL	E482965
DLC Premium	S-0P4MJU

DIMENSIONAL DRAWINGS (IN)

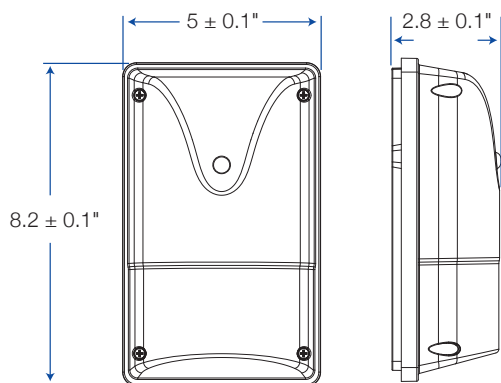

ELECTRICAL

Wattage	10W/15W/20W
Voltage	120-347V
Current	0.25A
Surge Protection	2.5kV
Auxiliary Output	N/A
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Cord Whip	11.8"
Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	Bronze
IP Rating	IP65

DIMENSIONS AND WEIGHTS

Fixture Weight	1.54 lbs
Fixture Dimensions	8.2 x 2.8 x 5 in
Carton Qty	1
Carton Weight	1.7 lbs
Carton Dimensions	8.6 x 3.2 x 5.3 in
Master Carton Qty	10
Master Carton Weight	19.86 lbs
Master Carton Dimensions	16.4 x 11.2 x 9.4 in