


# OVS

## Residential Wall Fan Heater



# OVRP

## Compact Ceiling Fan Heater

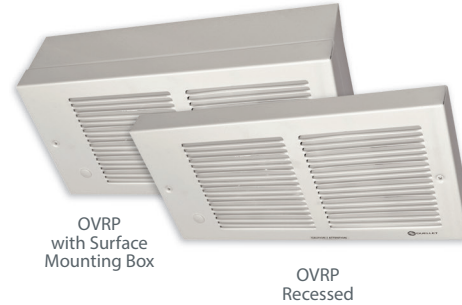

### Features

#### Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze, metallic charcoal, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

#### Finish

- Standard: epoxy/polyester powder paint.

#### Construction

- 20-gauge steel cabinet.
- 22-gauge steel front cover.
- High-limit temperature control with automatic reset.

#### Fan

- Quiet fan operating.
- 120V, 208V, 240/208V models: 500W to 1000W; 40 cfm fan and 1250W to 2000W; 80 cfm fan.
- 347V models : 80 cfm fan.
- Factory-lubricated motor.

#### Heating element

- 120V, 208V, 208/240V: durable tubular heating element with fins.
- Factory sealed element available.
- 347V: Iron-Chromium-Aluminum alloy.

#### Control

- If an electronic thermostat is used, it must be compatible with forced-air heaters.

#### Installation

- Quick installation with recess box mounting holes.
- Large wiring compartment.
- Surface mounting box available.
- Tight fit with V-shaped recess box.

#### Warranty

- 5-year warranty against defects.

#### Application

- Entrance way, kitchen, bathroom, family room, basement.

### OVS Features

#### Voltage

- 120V, 208V, 240/208V, 347V, 1-phase.

#### Control

- Built-in thermostat available with a control knob or tamperproof.

#### Installation

- Wall installation only.
- The air outlet should be installed at least 4 in. (102 mm) from flooring withstands temperature and 10 in. (254 mm) from linoleum flooring.
- May be recessed in 2 in. X 3 in. stud partitions.

### OVRP Features

#### Voltage

- 120V, 240/208V, 347V, 1-phase.


#### Control

- Must be used with a compatible wall thermostat (not included).
- Electronic relay available.

#### Installation

- Ceiling installation only.
- The air outlet should be installed at least 10 in. (25.4 cm) from the wall.
- May be recessed in ceiling.

Mounting positions available. Pictures showing front panel. Directional vane air flow.

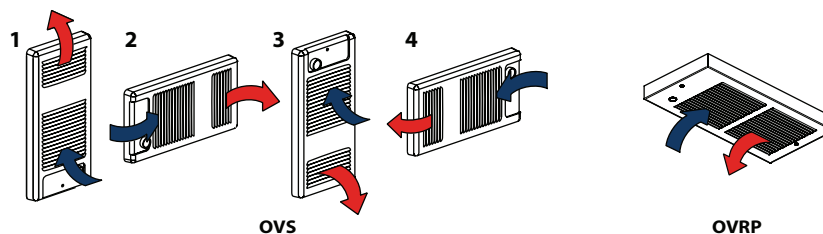

## OVS Models

Watts	Volts	Product #	Weight	
			lb	kg
500	120	OVS0502	9.0	4.1
750	120	OVS0752	9.0	4.1
1000	120	OVS1002	9.0	4.1
1250	120	OVS1252	9.0	4.1
1500	120	OVS1502	9.0	4.1
2000	208	OVS2008	9.0	4.1
500/375	240/208	OVS0500	9.0	4.1
750/563	240/208	OVS0750	9.0	4.1
1000/750	240/208	OVS1000	9.0	4.1
1250/938	240/208	OVS1250	9.0	4.1
1500/1125	240/208	OVS1500	9.0	4.1
2000/1500	240/208	OVS2000	9.0	4.1
1000	347	OVS1007	9.0	4.1
1500	347	OVS1507	9.0	4.1
2000	347	OVS2007	9.0	4.1

## OVRP Models

Watts	Volts	Product #	Weight	
			lb	kg
500	120	OVRP0502	9.0	4.1
750	120	OVRP0752	9.0	4.1
1000	120	OVRP1002	9.0	4.1
1250	120	OVRP1252	9.0	4.1
1500	120	OVRP1502	9.0	4.1
500/375	240/208	OVRP0500	9.0	4.1
750/563	240/208	OVRP0750	9.0	4.1
1000/750	240/208	OVRP1000	9.0	4.1
1250/938	240/208	OVRP1250	9.0	4.1
1500/1125	240/208	OVRP1500	9.0	4.1
500	347	OVRP0507	9.0	4.1
1000	347	OVRP1007	9.0	4.1
1500	347	OVRP1507	9.0	4.1
2000	347	OVRP2007	9.0	4.1

## OVS Options

Product # Kit	Product # Factory installed*	Description
KIT-OVS-BS	-	Surface mounting box
KIT-OVS-DIS <sup>1</sup>	DIS <sup>1</sup>	Disconnect switch, 20A at 277V max. (120V, 208V, 240/208V only)
-	ES <sup>2</sup>	Factory sealed element (120V, 208V, 240/208V only)
KIT-OVS-TB6	TB6	Single-pole bi-metal thermostat (347V factory installed only)
KIT-OVS-TB26 <sup>3</sup>	TB26 <sup>3</sup>	Double-pole bi-metal thermostat (347V factory installed only)
KIT-OVS-TB6-AV	TB6AV	Single-pole bi-metal tamperproof thermostat (347V factory installed only)
KIT-OVS-TB26-AV <sup>3</sup>	TB26AV <sup>3</sup>	Double-pole bi-metal tamperproof thermostat (347V factory installed only)

## OVRP Options

Product # Kit	Product # Factory installed*	Description
KIT-OVR-BS	-	Surface mounting box
KIT-OVR-DIS <sup>1</sup>	DIS <sup>1</sup>	Disconnect switch, 20A at 277V max. (120V, 208V, 240/208V only)
-	ES <sup>2</sup>	Factory sealed element (120V, 208V, 240/208V only)
-	TRIAC <sup>4</sup>	Single-pole electronic relay, coil 24V, without transformer, 15A at 347V max.
-	TRIACT <sup>4</sup>	Single-pole electronic relay, coil 24V, with transformer, 15A at 208V, 240V, 277V, 347V

\* For factory installed options, add the option number to the product number. See the **Product Code** section inside the front cover.

<sup>1</sup> For the U.S. only: The nominal current of the unit must not exceed 80% of the capacity of the disconnect.

<sup>2</sup> The option "sealed element" increases the reliability of these in humid environments. It does not completely eliminate the leakage currents of metal sheathed heating elements.

<sup>3</sup> "Off" position.

<sup>4</sup> The TRIAC and TRIACT option is only available for the products OVRP0507, OVRP0757 and OVRP1007.

Add "BL" for white, "AM" for almond.

Upcharge applicable for optional colors shown in the color chart section.

